



Mounted Ball Bearing Units

No matter your industry.
No matter your application.
Need a mounted ball bearing
that meets your exact specifications,
and you need it fast?

We Do That.

No matter your industry, No matter your application—When you



Extraordinary AMI service personnel

When you call in to AMI, you get extraordinary service from people who know our products exceptionally well. Our people stay with us so you get the benefit of all of their experience. And they're great people to talk to. Knowledgeable, helpful, and friendly.



Technical expertise you can count on


From standard configurations to configurations custom-tailored to your exact application, AMI's technical experts can help you make the right choices to achieve optimal bearing performance and longevity.



What you need is available—Now

Tens of thousands of possible combinations are only meaningful if they are available to you immediately, from stock. AMI's warehouses have an ample supply of a wide range of parts so that virtually all of those choices ARE available to you. Immediately.

Choices

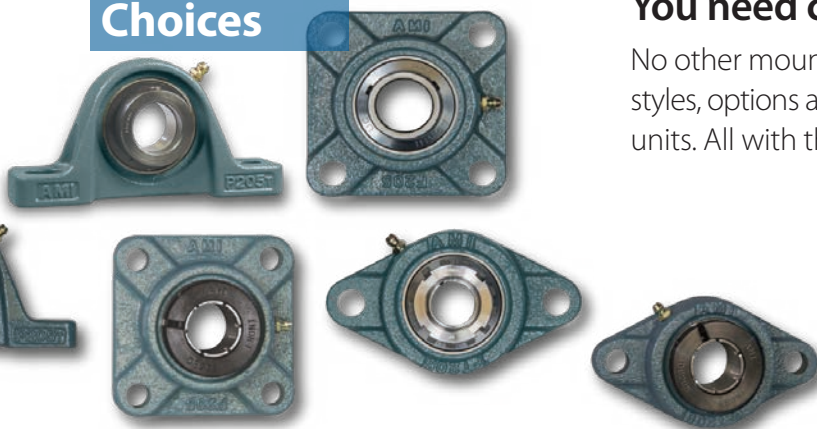

You need choices—We have them

No other mounted ball bearing company offers as many styles, options and configurations of mounted ball bearing units. All with the quality that you need and expect.

need exact specifications, and when you need it fast–We Do That.



Customization

We customize to your specs

AMI has the in-house capacity to custom-tailor your bearings to exactly fit your needs. Including this example of a housing being grooved to accept a safety cap.



Assembly

Assembled to Order

Whether your bearing is an uncommon or common one, large or small, the bearing and housing combination is assembled to your exact specifications.



Same Day Service

Same day, out the door to you

When you place your order by 4:00 pm Central Time, Monday - Friday, we'll normally have your order shipped out the same day.

Expedited Delivery Service

When your need is more urgent than standard shipping, call us: 800.882.8642, night or day, 365 days a year. Ask for AMI's Expedited Delivery Service and we'll do our very best to get you the bearings you need, fast. Even faster than our standard same day shipping services.

This service is available in most areas. Delivery methods may vary depending on your needs and available delivery options. Additional fees may apply.



We Do That.



These consist of single row deep groove ball bearings; using world renowned **ASAHI**[®] brand quality bearings manufactured by Asahi Seiko Co., Ltd., Japan, and cast iron, malleable or ductile cast iron, pressed steel, stainless steel or thermoplastic housings of various configurations.


The self-contained bearing features a spherical ground outside diameter bearing that is assembled into a corresponding spherical housing seat, providing full self-alignment of the bearing unit.

A set-screw locking mechanism is shown in the bearing cutaway above; this is the most popular method of locking the bearing insert onto a shaft. Bearings with adapter sleeves, eccentric and concentric locking collars are also available.

For set-screw locking types, the inner ring of the self-contained bearing is hardened in the raceway and surrounding areas, where hardening is necessary, while the extended part where the set-screws are located is left metallurgically softer and slightly more flexible. This special heat treatment method ensures maximum bearing performance, while preventing the set-screws from loosening during operation, because the set-screws can be tightened as needed without causing destructive inner ring cracking.

ASAHI[®] is a registered trademark of Asahi Seiko Co., Ltd., Japan; Accu-Loc[®] is a registered trademark of AMI Bearings, Inc.; Browning is a registered trademark of Regal-Beloit; Transmission Manufacturing L.P.; Dodge is a registered trademark of ABB; Fafnir is a registered trademark of The Timken Company; FYH is a registered trademark of Nippon Pillow Block MFG. Co.; Hub City is a registered trademark of Regal Beloit Corp.; IPTCI is a registered trademark of PTI International; Link-Belt is a registered trademark of Rexnord Corporation; MB is a registered trademark of Rexnord Corporation; MRC/SKF is a registered trademark of SKF USA Inc.; NTN is a registered trademark of NTN Corporation of Japan; SealMaster is a registered trademark of Regal-Beloit.

NOTE: Every effort has been put forth to ensure the accuracy of this catalog, but AMI Bearings, Inc. does not assume responsibility for any errors.

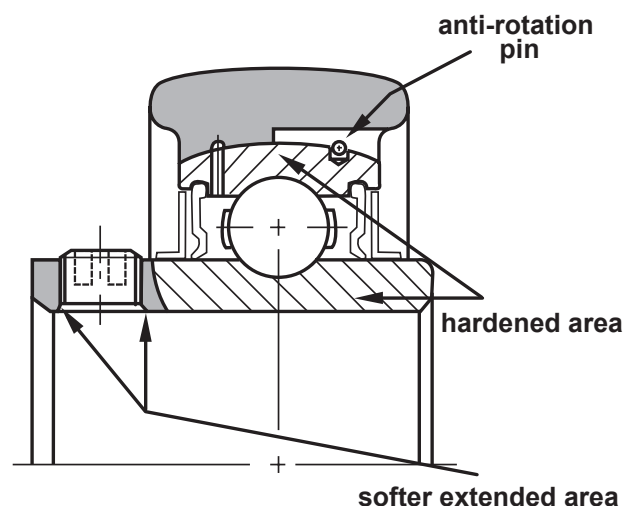

NOMENCLATURE					
Interchange by Manufacturer					6
INTERCHANGE INFORMATION					
Prefix and Suffix Nomenclature					11
Description	Series #	Locking Style	Dimensional Unit of Measurement	Housing Material	Page
NORMAL DUTY UNITS					
Pillow Block Units	UCP200	Set-Screw (wide)	Inch & Metric	Cast Iron	13
	UGP200	Eccentric (wide)	Inch & Metric		14
	BP200	Set-Screw (narrow)	Inch & Metric		15
	KHP200	Eccentric (narrow)	Inch & Metric		15
	UKP200+H	Adapter Sleeve	Inch & Metric		16
	UGAKH200	Eccentric (wide)	Inch & Metric		17
Low Base Pillow Block Units	UCLP200	Set-Screw (wide)	Inch & Metric		18
	BLP200	Set-Screw (narrow)	Inch & Metric		19
	KHLP200	Eccentric (narrow)	Inch & Metric		19
	UGAK200	Eccentric (wide)	Inch & Metric		20
Expansion Pillow Block Units	UCEP200	Set-Screw (wide)	Inch & Metric		21
Pillow Block Units	UCSP200	Set-Screw (wide)	Inch & Metric		22
	BLLP200	Set-Screw (narrow)	Inch & Metric		23
	KHLLP200	Eccentric (narrow)	Inch & Metric		23
	BPW200	Set-Screw (narrow)	Inch & Metric	Malleable Cast	24
	KHPW200	Eccentric (narrow)	Inch & Metric		24
Pressed Steel Pillow Block Units	BPR200	Set-Screw (narrow)	Inch & Metric	Pressed Steel	25
	KHPR200	Eccentric (narrow)	Inch & Metric		25
	BPP200	Set-Screw (narrow)	Inch & Metric		26
	KHPP200	Eccentric (narrow)	Inch & Metric		26
Tapped Base Pillow Block Units	UCTB200	Set-Screw (wide)	Inch	Cast Iron	27
	UCPA200		Metric		27
	BSHE200	Set-Screw (narrow)	Inch & Metric		28
	KHSHE200	Eccentric (narrow)	Inch & Metric		28
	UGSHE200	Eccentric (wide)	Metric		28
	UCSHE200	Set-Screw (wide)	Metric		28
Pedestal Base Pillow Block Units	UCPH200	Set-Screw (wide)	Inch & Metric		29
Two-Bolt Adjustable Flange Units	UCFA200		Inch & Metric		30
Two-Bolt Flange Units	UCFL200	Set-Screw (wide)	Inch & Metric	Cast Iron	31
	UCFT200		Inch & Metric		32
	BFT200	Set-Screw (narrow)	Inch & Metric		33
	KHFT200	Eccentric (narrow)	Inch & Metric		33
	UGFJT200	Eccentric (wide)	Inch & Metric		34
	UGCJTZ200		Inch & Metric		35
Two-Bolt Flange Units	BLFL200	Set-Screw (narrow)	Inch & Metric	Ductile Iron	36
	KHLFL200	Eccentric (narrow)	Inch & Metric		36
	BFX200	Set-Screw (narrow)	Inch & Metric		37
	KHFX200	Eccentric (narrow)	Inch & Metric		37
	BLCTE200	Set-Screw (narrow)	Inch & Metric	Cast Iron	38
	KHLCTE200	Eccentric (narrow)	Inch & Metric	Cast Iron	38
Pressed Steel Two-Bolt Flange Units	BPFL200	Set-Screw (narrow)	Inch & Metric	Pressed Steel	39
	KHPFL200	Eccentric (narrow)	Inch & Metric		39
Three-Bolt Flange Bracket Units	UCFB200	Set-Screw (wide)	Inch	Cast Iron	40
	UCFK200		Metric		40
Three-Bolt Flange Units	BTM200	Set-Screw (narrow)	Inch	Ductile Iron	41
	KHTM200	Eccentric (narrow)	Inch		41
	BCFTR200	Set-Screw (narrow)	Inch & Metric	Cast Iron	42
	KHCFT200	Eccentric (narrow)	Inch & Metric	Cast Iron	42
	BPF200	Set-Screw (narrow)	Inch & Metric	Pressed Steel	43
	KHPF200	Eccentric (narrow)	Inch & Metric		43
	BPFT200	Set-Screw (narrow)	Inch & Metric		44
	KHPFT200	Eccentric (narrow)	Inch & Metric		44
Four-Bolt Flange Units	UCLF200	Set-Screw (wide)	Inch & Metric	Cast Iron	45
	UCF200		Inch & Metric		45
	KHLF200	Eccentric (narrow)	Inch & Metric		46
	KHF200		Inch & Metric		46
	UGSLF200	Eccentric (wide)	Inch & Metric		47
	UKF200+H	Adapter Sleeve	Inch & Metric		48
	UGGFDR200	Eccentric (wide)	Inch & Metric	Malleable Cast	49
	UCFC200	Set-Screw (wide)	Metric	Cast Iron	50
Piloted Flange Cartridge Units	UCFCS200		Inch & Metric		51
	UCFCF200	Set-Screw (narrow)	Inch & Metric		52
	BME200		Metric		53
	KHME200	Eccentric (narrow)	Metric		53
	UGME200	Eccentric (wide)	Metric		53

Description	Series #	Locking Style	Dimensional Unit of Measurement	Housing Material	Page	
NORMAL DUTY UNITS						
Piloted Flange Cartridge Units	UCME200	Set-Screw (wide)	Metric	Cast Iron	53	
Cartridge Units	UCLC200		Inch		54	
	UCC200		Metric		54	
Cylindrical Rubber Cartridge Units	BRRCSM200	Set-Screw (narrow)	Inch & Metric	Rubber	55	
	KHRRCSM200	Eccentric (narrow)	Inch & Metric		55	
Wide Slot Take-Up Units	UCST200	Set-Screw (wide)	Inch	Cast Iron	56	
Take-Up Units	UCT200		Metric		57	
Narrow Slot Take-Up Units	UCNST200		Inch		58	
Hanger Bearing Units	UCECH200	Set-Screw (wide)	Inch & Metric	Ductile Iron	59	
NORMAL DUTY UNITS WITH PRESSED STEEL COVERS						
Pillow Block Units w/Cover	UCP200C(CE)	Set-Screw (wide)	Metric	Cast Iron	60	
	UCLP200C(CE)		Metric		60	
Two-Bolt Flange Units w/Cover	UCFL200C(CE)		Metric		60	
Four-Bolt Flange Units w/Cover	UCF200C(CE)		Metric		60	
Piloted Flange Cartridge Units w/Cover	UCFC200C(CE)		Metric		60	
Wide Slot Take-Up Units w/Cover	UCST200C(CE)		Metric		60	
NORMAL DUTY UNITS WITH CAST IRON COVERS						
Pillow Block Units w/Cover	CUCP200C(CE)	Set-Screw (wide)	Metric	Pressed Steel	61	
Two-Bolt Flange Units w/Cover	CUCFL200C(CE)		Metric		61	
Four-Bolt Flange Units w/Cover	CUCF200C(CE)		Metric		61	
Piloted Flange Cartridge Units w/Cover	CUCFC200C(CE)		Metric		61	
Wide Slot Take-Up Units w/Cover	CUCT200C(CE)		Metric		61	
ACCU-LOC® UNITS						
Pillow Block	UEP200	Concentric	Inch & Metric	Cast Iron	63	
Low Base Pillow Block Units	UEEP200		Inch & Metric		64	
Pillow Block Units	UESP200		Inch & Metric		65	
Low Base Pillow Block	UEL200		Inch		66	
Tapped Base Pillow Block	UESHE200		Inch		67	
Tapped Base Pillow Block Units	UETB200		Inch		68	
	UEPA200		Metric		68	
	UEFT200		Inch & Metric		69	
Two-Bolt Flange Units	UELFL200		Inch & Metric		70	
	UETFT200		Inch & Metric	71		
	UEFX200		Inch & Metric	72		
	UETM200		Inch & Metric	Ductile Iron	73	
Three-Bolt Flange Units	UEFB200		Inch	Cast Iron	74	
Three-Bolt Flange Bracket Units	UEFK200		Metric		74	
	UEF200		Inch & Metric		75	
Four-Bolt Flange Units	UEFCS200		Inch & Metric	Cast Iron	76	
Piloted Flange Cartridge Units	UELC200		Inch		77	
Cartridge Units	UEC200		Metric		77	
	UEST200		Inch	78		
Wide Slot Take-Up Units	UET200		Metric	78		
Hanger Bearing Units	UEECH200		Inch & Metric	Ductile Iron	79	
Pillow Block Units	UEPX00		Inch & Metric	Cast Iron	80	
Two-Bolt Flange Units	UEFLX00		Inch & Metric		80	
Four-Bolt Flange Units	UEFX00		Inch		81	
Piloted Flange Cartridge Units	UEFCSX00		Inch		81	
Wide Slot Take-Up Units	UESTX00		Inch		82	
Cartridge Units	UELX00		Inch		82	
MEDIUM DUTY UNITS						
Pillow Block Units	UCPX00		Set-Screw (wide)	Inch & Metric	Cast Iron	84
	UKPX00+H	Adapter Sleeve	Inch & Metric	85		
Two-Bolt Flange Units	UCFLX00	Set-Screw (wide)	Inch & Metric	86		
Four-Bolt Flange Units	UCFX00		Inch & Metric	87		
	UKFX00+H	Adapter Sleeve	Inch & Metric	88		
Piloted Flange Cartridge Units	UCFCSX00	Set-Screw (wide)	Inch	89		
	UCFCX00		Metric	89		
Cartridge Units Units	UCLCX00	Set-Screw (locking)	Inch	90		
Wide Slot Take-Up Units	UCSTX00	Set-Screw (locking)	Inch	91		
Take-Up Units	UCTX00	Set-Screw (wide)	Inch & Metric	92		
HEAVY DUTY UNITS						
Pillow Block Units	UCP300	Set-Screw (wide)	Inch & Metric	Cast Iron	94	
	UGP300	Eccentric (wide)	Inch & Metric		95	
	UKP-U300+H	Adapter Sleeve	Inch		96	
	UGP-U300	Eccentric (wide)	Inch & Metric		97	
	UCP-U300	Set-Screw (wide)	Inch & Metric		98	

Description	Series #	Locking Style	Dimensional Unit of Measurement	Housing Material	Page	
HEAVY DUTY UNITS						
Expansion Pillow Block Units	UGPE-U300	Eccentric (wide)	Inch & Metric	Cast Iron	99	
	UCPE-U300	Set-Screw (wide)	Inch & Metric		100	
Pillow Block Units	UGAO300	Eccentric (wide)	Inch & Metric		101	
	UCAO300	Set-Screw (wide)	Inch & Metric		102	
	UGSAO300	Eccentric (wide)	Inch & Metric		103	
	UCSAO300	Set-Screw (wide)	Inch & Metric		104	
	UKP300+H	Adapter Sleeve	Inch & Metric		105	
	Two-Bolt Flange Units	UCFL300	Set-Screw (wide)		Inch & Metric	106
Four-Bolt Flange Units	UCF300	Set-Screw (wide)	Inch & Metric		107	
Piloted Four-Bolt Flange Units	UCFS300		Metric		108	
Four-Bolt Flange Units	UGF300	Eccentric (wide)	Inch & Metric		109	
Four-Bolt Flange Units	UCF-U300	Set-Screw (wide)	Inch & Metric		110	
Expansion Four-Bolt Flange Units	UCFE-U300		Inch & Metric		111	
Four-Bolt Flange Units	UGCJO300	Eccentric (wide)	Inch & Metric		112	
	UCCJO300	Set-Screw (wide)	Inch & Metric		113	
	UKF300+H	Adapter Sleeve	Inch & Metric		114	
Take-Up Units	UCT300		Metric		115	
Cartridge Units	UCC300	Set-Screw (wide)	Metric		116	
SILVER SERIES COMPLETE UNITS						
Pillow Block Units	UP000	Eccentric (extra narrow)	Metric		ZDC Alloy	118
	KP000	Set-Screw (extra narrow)	Metric	118		
Two-Bolt Flange Units	UFL000	Eccentric (extra narrow)	Metric	119		
	KFL000	Set-Screw (extra narrow)	Metric	119		
Pillow Block Units	MUP000		Metric	ZDC Alloy with Electroless Chromate Finish	118	
Two-Bolt Flange Units	MUFL000	Eccentric (extra narrow)	Metric		119	
ALL BEARING INSERTS						
Normal Duty Ball Bearings	UC200	Set-Screw (wide)	Inch		121	
	UCW200		Inch		121	
	UC200		Metric		122	
	UCW200		Metric		122	
	UR200	Eccentric (wide)	Inch & Metric		123	
	UG200		Inch & Metric		124	
	UGW200		Inch		124	
	B		Set-Screw (narrow)		Inch & Metric	125
	BR	Inch & Metric			125	
	KH200	Eccentric (narrow)	Inch & Metric		126	
	KHR200		Inch & Metric		126	
	Cylindrical Normal Duty Ball Bearings	SER200	Set-Screw (wide)		Inch & Metric	127
	Normal Duty Ball Bearings	UK200+H	Adapter Sleeve		Inch & Metric	128
Accu-Loc® Ball Bearings	UE200	Concentric	Inch & Metric		129	
Cylindrical Accu-Loc® Ball Bearings	SUE200		Inch & Metric		130	
Medium Duty Ball Bearings	UCX00	Set-Screw (wide)	Inch & Metric		131	
Normal Duty Ball Bearings	UKX00+H	Adapter Sleeve	Inch & Metric		132	
	UEX00		Inch		133	
Heavy Duty Ball Bearings	UC300	Set-Screw (wide)	Inch & Metric		134	
	UG300	Eccentric (wide)	Inch & Metric		135	
	UK300+H	Adapter Sleeve	Inch & Metric		136	
Silver Series Ball Bearings	U000	Eccentric (narrow)	Metric		137	
	URE000		Inch		137	
	K000	Set-Screw (extra narrow)	Metric		137	
	MU000	Eccentric (extra narrow)	Metric		137	
FREE-SPINNING BEARINGS						
Free-Spinning Bearing Units						138
HIGH-TEMPERATURE UNITS						
High Temperature Bearing Units						140
TECHNICAL INFORMATION						
Materials					142	
Tolerances					143	
Bearing Mounting					144	
Lubrication					149	
Load Capacity and Life of Bearings					151	
Accu-Loc vs. Set-Screws					153	
COMPANY INFORMATION						
Terms & Conditions of Sale					154	
Limited Warranty					155	
Literature Request					156	
Company Profile					157	

AMI Part #	Browning	Dodge	FYH	HUB CITY	INA	IPTCI	Link-Belt	MB	MRC/SKF	NTN	Sealmaster	Timken
PILLOW BLOCKS												
BLLP5-16				PB100x1	PAKY1	SBP205-16	PL3-S216N			ASPB205-100	VPL-16	SAK1
BLP5-16	VSPL-116	P2B-VSCB-100	SBP205-16	PB100Lx1	PASEY1	SBP205-16					VP-16	SAS1
BP5-16	VPS-116	P2B-VSC-100			PBY1		PS251			ASPP205-100	SSP-16	
BPP5-16			SBPP205-16F	PB100Sx1			KP-S216DC					
BPPL5-16MZ2CEW							KP-S216D					
BPPL5-16MZ2CW							KP-S216					
BPPL5-16MZ2W										ASRPP205-100	LP-16	GPSD1
BPR5-16	SSRPS-116			PB150x1						AELPB205-100	VPL-16	VAK1
BPW5-16	VPS-116M				PAK1		PL3-W216U		SYH1FM	AELPL205-100	VP-16E	VAS1
KHLLP205	VPLE-116	P2B-SXVB-100		PB220x1	PASE1		P3-W216U		SY1FM	AELPP205-100	SSP16E	PB1
KHP205-16	VPE-116	P2B-SXV-200		PB221x1	PB1				SR1FM	AELRPP205-100	LRP-16	RPB1
KHPP205-16	SSPE-116	P2B-SLX-100	SAPP205-16F		RPB1						LP-16E	
KHPR205-16	SSRPE-116											
KHPW205-16	VPE-116M											
MUCP205-16	SPS-S216		UCSP205-16S6H1	PB251STWx1		SUCSP205-16			SPB100SS	F-UCPM205-100	CRPS-PN216	
MUCP205-16NP						SUCNPP205-16						
MUCPPL205-16CEW	CPS-S216 ECC			PB251CTWx1 CPCC					CPB100SS EC		CRPC-PN16 ECC	
MUCPPL205-16CW	CPS-S216 ECO			PB251CTWx1 CPOC							CRPC-PN16 ECO	
MUCPPL205-16W	CPS-S216		UCP205-16S6PL	PB251CTWx1		SUCTP205-16			CPB100SS	F-UCPR205-100D1	CRPC-PN16	
MUCPPWS205-16			UCPP205-16S6H1									
UCEP205-16		P2B-SCH-100-E										
UCLP205-16	VPLS-216	P2B-SCB-100	SL205-16	PB250Wx1	RAKY1	UCPL205-16	PL3-U216N	CL251		UCPL205-100D1	EMP-16	RAKHL1
UCMP205-16MZ2		P2B-SCEZ-100-SH									NPL-16	YAK1
UCP205-16	VPS-216	P2B-SC-100	UCP205-16	PB251Wx1	RASEY1	UCP205-16	P3-U216N	C251	SY1TF	UCP205-100D1	BP-16	
UCP205-16NPMZ2			UCP205-16S7Z5	PBW271WZ-1	RASEY1-FA125	CUCNPP205-16	WP3S216E	NC251	ZPB100ZM	UCP305-100D1	NP-16	YAS1
UCP305-16			UCP305-16									YAS1NT
UCPEU306-19							PE-U319					
UCHP205-16			UCPH205-16							UCPH205-100D1		
UCPPL205-16MZ2CEW	CPS-Z216 ECC	P2B-SCEZ-100-PCR ECC							CPB100ZM EC			
UCPPL205-16MZ2CW	CPS-Z216 ECO	P2B-SCEZ-100-PCR ECO										
UCPPL205-16MZ2W	CPS-Z216	P2B-SCEZ-100-PCR				CUCTP205-16			CPB100ZM		NP-16C-OR	YAS1PT
UCPPL205-16W	CPS-216	P2B-SCEZ-100-P										
UCPU306-19							P-U319					
UCPX05-16	VPS-316	P2B-SCM-100	UCPX05-16	PB350x1		UCPX05-16		C-35-1	SYM1TF	UCPX05-100D1	MP-16	YASM1
UCSP205-16											SP-16	
UEL205											NPL205TM	
UEL205-16	VPLB-216	P2B-DLB-100						KCL-45-1			NPL-16T	
UEL205-16NP								NCL-25-1				
UEMP205-16MZ20		P2B-DLEZ-100SHCR									CRPS-PN16T	
UEP205											NP205TM	
UEP205-16	VPB-216	P2B-DL-100						KC-45-1			NP16-T	RASC1
UEP205-16NP								NC25K-1				
UEPPL205-16MZ20W		P2B-DL-100-PCR									CRPC-PN16T	
UGAK205-16	VPLE-216	P2B-SXRB-100	NAPK205-16	PB220Wx1	RAK1	NAPL205-16			SYH1WF	UELPL205-100D1	RPL-16	RAK1
UGAKH205-16												RAKH1
UGAO307-23												RAO x 1-7/16
UGP205-16	VPE-216	P2B-SXR-100	NAP205-16	PB221Wx1	RASE1	NAP205-16	P3-Y216N		SY1WF	UEL205-100D1	RP-16E	RAS1
UGP305-16										UEL305-100D1		
UGPEU307-23							PE-Y339					
UGPU307-23							P-Y339					
UGSAO307-23							P2-U339					RSAO x2-7/16
UKP206+HE2306			UKP206+HE2306									

AMI Part #	Browning	Dodge	FYH	HUB CITY	INA	IPTCI	Link-Belt	MB	MRC/SKF	NTN	Sealmaster	Timken
TAPPED BASE												
KHSHE205			UCPAN205-16S6H1	TPB250STWx1	PSHE25-N	SUCSPA205-16 SUCNPPA205-16			STB100SS			
MUCTB205-16												
MUCTB205-16NP												
MUCTBL205-16CEW	CTBS-S216 ECC			TPB250CTWx1 CPOC							CRTBC-PN16 ECC	
MUCTBL205-16CW	CTBS-S216 ECO			TPB250CTWx1 CPOC							CRTBC-PN16 ECO	
MUCTBL205-16W	CTBS-S216		UCPAN205-16S6PL	TPB250CTWx1					CTB100SS		CRTBC-PN16	
UCMTB205-16MZ2										UCUP205-D1	BTB-16	
UCPA205			UCPA205									
UCSHE205					RSHEY25-N							
UCTB205-16	VTBS-216	TB-SC-100	UCPAN205-16	TPB250Wx1	RSHEY1	UCPA205-16 CUCNPPA205-16	PT3-U216N NTBC-25-1	TBC-25-1 NTBC-25-1	ZTB100ZM		TB-16	STB1
UCTB205-16NPMZ2												
UCTBL205-16MZ2CEW	CTBS-Z216 ECC	TB-SCEZ-100-PCR ECC										
UCTBL205-16MZ2CW	CTBS-Z216 ECO	TB-SCEZ-100-PCR ECO										
UCTBL205-16MZ2W	CTBS-Z216	TB-SCEZ-100-PCR							CTB100ZM		TB-16C-CR	
UCTBL205-16W	CTBS-216	TB-SCEZ-100-P									TB205TMC	
UEPA205								KTBC-45-1 NTBC-25-1			TB-16T	
UETB205-16	VTBB-216	TB-DL-100										
UETB205-16NP												
UETBL205-16MZ2W		TB-DL-100-CR									CRTBC-PN16T	
TAKE UP												
MUCNST205-16NP						SUCNPTRS205-16						
MUCNTPL205-16W			UCTRS205-16S6PL						CTN100SS			
MUCST205-16NP						SUCNPT205-16						
MUCT205-16			UCT205-16S6H1			SUCST205-16			STW100SS			
MUCTPL205-16W												
MUCWTPL205-16W									CTW100SS		BST-16	
UCMT205-16MZ2												
UCNST205-16			UCTRS205-16E	TU250Wx1								
UCNST205-16NPMZ2						CUCNPTRS205-16						
UCNTPL205-16MZ2W		NSTU-SCEZ-100-PCR							CTN100ZM			
UCST205-16	VTWS-216	WSTU-SC-100	UCT205-16E	WSTU250Wx1	RTUEY1	UCT205-16 CUCNPT205-16	TH3-U216N WTH3-S216E	TC-25-1 NTC-25-1	TYB1TF		ST-16	YTU1
UCST205-16NPMZ2					RTUEY1-FA125					UCT205D1		YTU1NT
UCT205			UCT205									
UCT305-16			UCT305-16									
UCTPL205-16MZ2W		WSTU-SCEZ-100-PCR					WTH-S216E				CRST-16	YTU1PT
UCTX05-16	VTWS-316	WSTU-SCM-100	UCTX05-16E			UCTX05-16		TC-35-1	TBYM1TF	UCTX05-100D1	MST-16	YTUM1
UCWTP205-16MZ2W		WSTU-SCEZ-100-PCR							CTW100ZM		ST-16C-CR	
UENTPL205-16MZ2W		NSTU-DL-100-CR										
UEST205-16		WSTU-DL-100						KTC-45-1 NTC-25K1			ST-16T	
UEST205-16NP											ST205TMC	
UET205											ST-16TC-CR	
UEWTP205-16MZ2W		WSTU-DL-100-PCR										
BEARING INSERT												
B5-16	VS-116	INS-VSC-100	SB205-16	B250x1	GAY100-NPP-B-AS2V GAY100-NPP-B-AS2VFA125	SB205-16G	SG216EL			AS205-100	L-16	YA100RRB
B5-16MZ2			SB205-16S7									
BR5-16	SLS-116					CSB205-16	SBG216EL	MSLN-16		ASS205-100	SL-16	
KH205-16	VE-116	INS-SXV-100	SA205-16F	B220x1	GRA100-NPP-B-AS2V	SA205-16G	W216UL		YET205-100	AEL205-100	V-16E	RA100RRB
KHR205-16	SLE-116				RA100-NPP	CSA205-16	WB216UL			AELS205-100		
MB5-16			SB205-16S6									
MSER205-16			ER205-16S6			SSER205-16						
MUC205-16	VS-S216		UC205-16S6PL	B250TWx1		SUC205-16				FJUC205-100D1		
MUC205-16RF									RRH1100BRR			
SER205			ER205				ER205				ER-205	

AMI Part #	Browning	Dodge	FVH	HUB CITY	INA	IPTCI	Link-Belt	MB	MRC/SKF	NTN	Sealmaster	Timken
SER205-16	VER-216		ER205-16			ER205-16	UBGL216NL	ER-16			ER-16	Timken ER16
SER205-16FSX								ER-16-SFF			ERX-16 (LO, XLO)	
SER205FSX											ERX205 (LO, XLO)	
SUE205								ER-16K			ER-205TMC	
SUE205-16								ER-16K			ER-16T	
SUE205-16FSX								ER-16K-SFF			ERX-16T (LO, XLO)	
SUE205FSX											ERX205TM (LO, XLO)	
UC205											5205M	
UC205-16	VS-216	INS-SC-100	UC205-16	YW250x1	GY1100KRR-BAS2V	UC205-16	UG216NL	MB-25-1-PA	YAR205-100-2F	UC205-100D1	2-1	GY1100KRB
UC205-16AH	VS-216AH											
UC205-16MZ2		INS-SC-100CR		YWZ250x1		CUC205-16						
UC205-16MZ20		INS-SC-100-CR										
UC305-16			UC305-16									
UCX05-16	VS-316	INS-SCM-100	UCX05-16	B350x1		UCX05-16		MB-35-1-PA	YAR206-100-2F	UCX05-100D1		
UE205												
UE205-16	VB-216	INS-DL-100						KMB-45-1-PA				
UE205-16FSX												
UE205-16MZ20		INS-DL-100-CR										
UE205FSX												
UG205-16	VE-216	INS-SXR-100	NA205-16	YW220x1	G1100-KRR-BAS2V	NA205-16	YG216NL		YEL205-100-2F	UEL205-100D1	R-16E	G1100KRRB
UG307-23										UEL307-107D1		GN107KRRB
UK206+HE2306			UK206+HE2306									
UK306+HE2306			UK306+HE2306									
UKX06+HE2306			UKX06+HE2306									
UR205-16							UBG216NL					
CARTRIDGE												
KHRRCSM205-16					RCSMB1							RCSM1
UCC205			UCC205							UCC205		
UCC305			UCC305							UCC305		
UCFC205-16NPMZ2			UCFC205-16STZ5			CUONPFC205-16		NPFC4251				RFC1NT
UCLC205-16											SC-16	RC1
UEL205											SC205TMC	
UEL205-16											SC-16T	
2 BOLT FLANGE												
BFT205-16												
BF205-16	V2S-116M	LFT-SC-100		FB260x1	PCJTY1		FX-W216U				LFT-16	VFTD1
BLCTE205-16				FB160x1	FLCTEY1					ASFD205-100		
BLF5-16MZ2W												
BLFL205-16			BLF205-16							ASFB205-100		
BNFL5-16MZ2CEW	CF2S-Z216 ECC	F2B-SOEZ-100-POR ECO					KFX-S216DC		C2F100ZM EC		CRFTC-PN16 ECC	
BNFL5-16MZ2CW	CF2S-Z216 ECO	F2B-SOEZ-100-POR ECO					KFX-S216D				CRFTC-PN16 ECO	
BNFL5-16MZ2W							KFX-S216					
BPFL205-16	SSF2S-116	F2B-SL-100	SBPFL205-16	FB110Sx1	RATY1			FPS2-25-1	FTP1	ASPL205-100	SSF2-16	
KHFT205-16	VF2E-116	F2B-SXV-100	SAPFL205-16	FB230x1	PCJT1	SALF205-16	FX3-W216U		FYT1FM	AELFL205-100	VFT-16E	VCJT1
KHFX205-16	VF2E-116M	LFT-SXV-100				SALF205-16H4	FX-W216U				LFT-16E	
KHLCTE205-16					FLCTE1					AELFD205-100		FLCT1
KHLFL205-16			ALF205-16			SALF205-16				AELFB205-100		
KHPFL205-16	SSF2E-116	F2B-SLX-100	SAPFL205-16		RAT1		52MST216		FT1FM	AELPFL205-100	SSF2-16E	RAT1
MBNFL205-16CEW	CF2S-S216 ECC			FB250CTWx1 QPCC					C2F100SS EC			
MBNFL205-16CW	CF2S-S216 ECO			FB250CTWx1 QPOC								
MUCFL205-16			UCSFL205-16SGH1	FB260STWx1		SUCSFL205-16			S2F100SS	FUCFM205-100	CRFTS-PN16	
MUCFT205-16NP						SUCNPFL205-16						
MUCNFL205-16W	CF2S-S216		UCFL205-16SGPL	FB250CTWx1					C2F100SS	FUCFL205-100D1	CRFTC-PN16	
PFL5							52MST-1					
PFT5							52MSTR-1					

AMI Part #	Browning	Dodge	FYH	HUB CITY	INA	IPTCI	Link-Belt	MB	MRC/SKF	NTN	Sealmaster	Timken
UCFA205-16			UCFA205-16		PSFT1					UCFA205-100D1		
UCFL205-16			UCFL205-16							UCFL205D1		
UCFL305-16			UCFL305-16							UCFL305-100D1		
UCFLX05-16	VF2S-316	F2B-SCM-100	UCFLX05-16			UCFLX05-16		FC2-35-1	FYTM1TF	UCFLX05-100D1	MSFT-16	YCJTM1
UCFT205-16	VF2S-216	F2B-SC-100	UCFL205-16	FB260Wx1	RCJTY1	UCFL205-16	FX3-U216N	FC2-25-1	FYTB1TR	UCFL205-100D1	SFT-16	YCJT1
UCFT205-16NPMZ2			UCFL205-16S7Z5	FB280HWx1	RCJTY-FA125	CUCNPFL205-16	WF3S-S216E	NFC2-25-1	ZZF100ZM			YCJT1NT
UCFT205-16TCMZ2		F2B-SCTC-100-CR					WF3S-S216E				BFT-16	
UCIMFL205-16MZ2		F2B-SCEZ-100-SH										
UCNFL205-16MZ2W	CF2S-Z216	F2B-SCEZ-100-PCR									SFT-16C-CR	YCJT1PT
UCNFL205-16W	CF2S-216	F2B-SOEZ-100-P						KFC2-45-1			SFT205TM	
UEFT205								NFC2-25K-1			SFT-16T	
UEFT205-16	VF2B-216	F2B-DL-100										
UEFT205-16NP		LFT-DL-100										
UEFX205-16												
UEFL205-16												
UEMFL205-16MZ20		F2B-DLEZ-100-SCHR									CRFTS-PN16T	
UENFL205-16MZ20W		F2B-DL-100-PCR									CRFTC-PN16T	
UETFT205-16											TFT-16T	
UGCJT205-16		F2BZ-SXR-100			RCJT21							
UGFJT205-16	VF2E-216	F2B-SXR-100	NANFL205-16	FB230Wx1	RCJT1	NANFL205-16			FYT1WM	UELFLU205-100D1	RFT-16E	RCJT1
UKFL206+HE2306			UKFL206+HE2306									
UKFL306+HE2306			UKFL306+HE2306									
UKFLX06+HE2306			UKFLX06+HE2306									
3 BOLT FLANGE												
BPFT205-16	SSF3S-116	F3B-SL-100	SBPF205-16	FB100Sx1	RAY1			FPS3-25-1		ASPF205-100	SSF-16	
BTM205-16	SSF3TS-116				RATRY1			TFPS-25-1			TSSF-16	
KHPF205-16	VF3S-116M	LF-SC-100	SAPF205-16	FB150x1	RA1	SBRFB205-16	F-W216U				LF-16	RA1
KHPT205-16	SSF3E-116	F3B-SLX-100			RATR1	52MSC216	52MSTR216		F1FM	AELPF205-100	SSF-16E	RATR1
KHTM205-16	SSF3TE-100										TSSF-16E	VFD1
MBPFS5-16	VF3E-116M	LF-SXV-100	UCPF205-16S6H1			SARFB205-16	F-W216U				LF-16E	
MBPFTS5-16			UCPFT205-16S6H1									
MUCFB205-16			UCSFB205-16S6H1			SUCSFB205-16					CRFBS-PN16	
MUCFB205-16NP			UCSFB205-16S6H1			SUCNPFB205-16						
MUCFBL205-16W			UCFBL205-16S6PL			SUCTFB205-16			CBF100SS			
PF5-16							52MS-1					
UCFB205-16	VFB-216	FB-SC-100	UCFB205-16			UCFB205-16	FB3-U216N	MFB-25-1			FB-16	
UCFB205-16NPMZ2			UCFB205-16S7Z5			CUCNPFB205-16	WFB3S216E	NMFB-1				
UCFBL205-16MZ2CEW		FB-SCEZ-100-PCR ECC										
UCFBL205-16MZ2CW		FB-SCEZ-100-PCRECO										
UCFBL205-16MZ2W		FB-SCEZ-100-PCR										
UCFBL205-16W		FB-SOEZ-100-P				CUCTFB205-16			CFB100ZM		CRFB-16	
UCFK205										UCFH205D1	FB-16-CR	
UEMFB205-16MZ2												
UEFB205-16	VFB-216	FB-DL-100									CRFBS-PN16T	
UEFB205-16NP											FB16T	
UEFBL205-16MZ20W		FB-DLEZ-100-PCR										
UEFK205											FB-16TC-CR	
4 BOLT FLANGE												
BF205-16	VF4S-116	F4B-VSC-100	SBF205-16	FB250x1	PCJY1	SBF205-16	F3-S216N				VF-16	SCJ1
BFPL5-16MZ2CEW	CF4S-Z216 ECC	F4B-SCEZ-100-PCRECO					KF-S216DC		C4F100ZM EC		CRFC-PN16 ECC	
BFPL5-16MZ2CW	CF4S-Z216 ECO	F4B-SCEZ-100-PCRECO					KF-S216D				CRFC-PN16 ECO	
BP15-16MZ2W							KF-S216					
KHF205-16	VF4S-116E	F4B-SXV-100	SAF205-16	FB220x1	PCJ1		F3-W216U		FY1FM	AELF205-100D1		VCJ1
MBFPL5-16CEW	CF4S-S216 ECC			FB250CTWx1 QPOC					C4F100SS EC			

AMI Part #	Browning	Dodge	FYH	HUB CITY	INA	IPTCI	Link-Belt	MB	MRC/SKF	NTN	Sealmaster	Timken
MBFPL5-16CW	CF4S-S216 ECO	F4B-SCEZ-100-SHR	UCSF205-16S6H1	FB250CTWx1 CPOC FB250STWx1					S4F100SS		CRFS-PN16	
MUCF205-16		F4B-SCEZ-100-SHR	UCSF205-16S6H1	FB250CTWx1		SUCNPF205-16						
MUCF205-16NP												
MUCFPL205-16W	CF4S-S216		UCF205-16S6PL	FB250CTWx1					C4F100SS		CRFC-PN16	
UCF205-16	VF4S-216	F4B-SC-100	UCF205-16E	FB250Wx1	RCJY1		F3-U216N	FC4-25-1	FY1TF	UCF205-100D1	SF-16	YCJ1
UCF205-16NPMZ2			UCF205-16S7Z5	FB270HWZx1	RCJY1-FA125		WF3S216E	NFC4-25-1	Z4F100ZM			YCJT1NT
UCF305-16			UCF305-16							UCF305-100D1		
UCFEU312-39							FE-U339					
UCFPL205-16MZZW	CF4S-Z216	F4B-SCEZ-100-PCR							C4F100ZM			
UCFPL205-16W		F4B-SCEZ-100-P										
UCFS305			UCFS305							UCFS305D1		
UCFU312-39							F-U339					
UCFX05-16	VF4S-316	F4B-SCM-100	UCFX05-16E	FB350x1				FC4-35-1	FYM1TF	UCFX05-100D1	MSF-16	YCMJ1
UCMF205-16MZZ		F4B-SCEZ-100-SH										
UEF205-16	VF4B-216	F4B-DL-100						KFC4-45-1			SF16T	
UEFPL205-16MZZW		F4B-DLEZ-100-PCR									CRFC-PN16T	
UEMF205-16MZZ0		F4B-DLEZ-100SHCR									CRFS-PN16T	
UCGJO312-39												
UGGDFR208-24												
UGSLF205-16	VF4E-216	F4B-SXR-100	NANF205-16	FB220Wx1	RCJ1		F3-Y216N		FY1WF	UEL205-100D1	RF-16E	RCJ1
UKF206+HE2306			UKF206+HE2306							UKF206D1+HE2306		
UKF306+HE2306			UKF306+HE2306									
UKFX06+HE2306			UKFX06+HE2306									
FLANGE CARTRIDGE												
KHME205					PME25-N							
MUCFCS208-24NP						SUCNPFCS205-16				UCFC205		
UCFC205			UCFC205									
UCFCF205-16			UCFCF205-16									
UCFCS208-24	VFOS-224	FC-SC-108						PFC4-25-1		UCFC205	SFC-24	RFC1
UCFCS208-24NPMZ2						B/C UCNPFCS208.24		NPF04-25-1-12				
UCFCSX05-16	VFCS-316	FC-SCM-100	UCFCX05-16E	FC350x1				PFC4-35-1			MFC-16	
UCFCX05-16			UCFCX05-16							UCFCX05-100D1		
UCME205					RMEY25-N							
UEFC208-24NP												
UEFCS208-24	VF0B-216	FC-DL-108						KPFC4-45-1-12			SFC-24T	
HANGER												
MUCHECH205-16NP						SUCNPHA205-16						
MUCHPL205-16W			UCHA205-16S6PL									
UCHPL205-16MZZW			UCHA205-16S7PL									
UCECH205-16			UCHA205-16E2					MEHB-1		UCHB205-100D1	SEHB-16	RHC1 (Accu-Hoc Style)
UEECH205-16NPMZ2						B/C UCNPHA205-16		NMEHB-1				
UEECH205-16		SCHB-DL-100										

Trademark and trade names used in this catalog are for reference purposes only and belong to the respective owners.

52100 Steel, Wide Inner Ring,
Spherical, Set-Screw

Flange 2-Bolt, Cast Iron

1-Inch Bore

Nickel-Plate

C (open cover)
CE (closed cover)**UCFT205-16 =****UC****FT****205-16****NP****C(CE)**

(COMPLETE UNIT)

(BEARING)

(HOUSING)

(BORE SIZE)

(COATING)

(COVERS)

PROTECTION, COLORS & COVERS

MZ2.....	Zinc Bearing Insert
MZ20.....	Kanigen Bearing Insert
NP.....	Nickel-Plate (Copper Nickel Chrome)
W.....	White Thermoplastic Housing
B.....	Black Thermoplastic Housing
C.....	2 open covers
CE.....	1 closed cover and 1 open cover
BS.....	Back Seal

BEARING INSERTS

MB.....	440C Stainless, Narrow Inner Ring, Spherical OD, Set Screw
MSER.....	440C Stainless, Wide Inner Ring, Cylindrical w/Snap Ring, Set Screw
MUC.....	440C Stainless, Wide Inner Ring, Spherical OD, Set Screw
UC.....	52100 Steel, Wide Inner Ring, Spherical OD, Set Screw
UCW.....	52100 Steel, Wide Inner Ring, Spherical OD, Set Screw
UR.....	52100 Steel, Wide Inner Ring, Cylindrical OD, Set Screw
UE.....	Black Oxide, Wide Inner Ring, Spherical OD, Accu-Loc®
SUE.....	Black Oxide, Wide Inner Ring, Cylindrical OD w/Snap Ring, Accu-Loc®
UCX.....	52100 Steel, Medium Duty, Wide Inner Ring, Spherical OD, Set Screw
UG.....	52100 Steel, Wide Inner Ring, Spherical OD, Eccentric
UGW.....	52100 Steel, Wide Inner Ring, Spherical OD, Eccentric
B.....	52100 Steel, Narrow Inner Ring, Spherical OD, Set Screw
BR.....	52100 Steel, Narrow Inner Ring, Cylindrical OD, Set Screw
KH.....	52100 Steel, Narrow Inner Ring, Spherical OD, Eccentric
KHR.....	52100 Steel, Narrow Inner Ring, Cylindrical OD, Eccentric
SER.....	52100 Steel, Wide Inner Ring, Cylindrical OD w/Snap Ring, Set Screw
UK.....	52100 Steel, Spherical OD, Adapter
K000.....	52100 Steel, Extra Narrow Inner Ring, Set Screw
U000.....	52100 Steel, Extra Narrow Inner Ring, Eccentric
MU000.....	Stainless Steel, Extra Narrow Inner Ring, Eccentric

SPECIAL BEARING INSERTS


PAGD.....	Poly-Acetal Races with Glass Balls, Double Row, Wide Inner Ring, Spherical OD, Set Screw
PAGS.....	Poly-Acetal Races with Glass Balls, Double Row, Wide Inner Ring, Spherical OD, Set Screw
PAMD.....	Poly-Acetal Races with Stainless Balls, Double Row, Wide Inner Ring, Spherical OD, Set Screw
PAMS.....	Poly-Acetal Races with Stainless Balls, Double Row, Wide Inner Ring, Spherical OD, Set Screw
PAV.....	Poly-Acetal Races Sleeve/Bushing

SERIES

000.....	Extra Light Duty
200.....	Normal Duty
X00.....	Medium Duty
300.....	Heavy Duty


HOUSINGS


FT2.....	2 Bolt Flange, Gray Cast Iron
FL.....	2 Bolt Flange, Gray Cast Iron
FJT.....	2 Bolt Flange, Gray Cast Iron
CJTZ.....	Piloted 2 Bolt Flange, Gray Cast Iron
LFL.....	2 Bolt Flange, Gray Cast Iron
FX.....	2 Bolt Flange, Malleable Cast
LCTE.....	2 Bolt Flange, Malleable Cast
PFL.....	2 Bolt Flange, Pressed Steel
FA.....	2 Bolt Adjustable Flange, Gray Cast Iron
NFL.....	2 Bolt Flange, Thermoplastic
LF (204-205).....	2 Bolt Flange, Thermoplastic, Round Bolt Hole
LX (204-205).....	2 Bolt Flange, Thermoplastic, Square Bolt Hole
P200.....	Pillow Block, Gray Cast Iron
LP.....	Low Base Pillow Block, Gray Cast Iron
AK.....	Low Base Pillow Block, Gray Cast Iron
EP.....	Expansion Type Pillow Block, Gray Cast Iron
LLP.....	Pillow Block, Gray Cast Iron
PP.....	Pillow Block, Pressed Steel
PR.....	Rubber Cushioned Pillow Block, Pressed Steel
PW.....	Pillow Block, Malleable Cast
PPL.....	Pillow Block, Thermoplastic
TB.....	Tapped Base Pillow Block, Gray Cast Iron
PA.....	Tapped Base Pillow Block, Gray Cast Iron
TBL.....	Tapped Base, Thermoplastic
PH.....	Pedestal Base Pillow Block, Gray Cast Iron
FB.....	3 Bolt Flange Bracket, Gray Cast Iron
FK.....	3 Bolt Flange Bracket, Gray Cast Iron
TM.....	3 Bolt Flange, Malleable Cast
PF.....	3 Bolt Flange, Pressed Steel
PFT.....	3 Bolt Flange, Pressed Steel
FBL.....	3 Bolt Flange Bracket, Thermoplastic
F.....	4 Bolt Flange, Gray Cast Iron
LF.....	4 Bolt Flange, Gray Cast Iron
SLF.....	4 Bolt Flange, Gray Cast Iron
FPL.....	4 Bolt Flange, Thermoplastic
FC.....	Piloted Flange Cartridge, Gray Cast Iron
FCS.....	Piloted Flange Cartridge, Gray Cast Iron
FCF.....	Piloted Flange Cartridge, Gray Cast Iron
ST.....	Wide Slot Take-Up, Gray Cast Iron
T.....	Take-Up, Gray Cast Iron
NST.....	Narrow Slot Take-Up, Gray Cast Iron
TPL.....	Take Up, Standard Slot, Thermoplastic
WTPL.....	Take Up, Wide Slot, Thermoplastic
NTPL.....	Take Up, Narrow Slot, Thermoplastic
ECH.....	Hanger Bearing, Gray Cast Iron
HPL.....	Hanger, Thermoplastic
LC.....	Cartridge, Gray Cast Iron
C.....	Cartridge, Gray Cast Iron
PX00.....	Medium Duty Pillow Block, Gray Cast Iron
FLX.....	Medium Duty 2 Bolt Flange, Gray Cast Iron
FX00.....	Medium Duty 4 Bolt Flange, Gray Cast Iron
FCSX.....	Medium Duty Flange Cartridge, Gray Cast Iron
FCX.....	Medium Duty Flange Cartridge, Gray Cast Iron
TX00.....	Medium Duty Take-Up, Gray Cast Iron
P300.....	Heavy Duty Pillow Block, Gray Cast Iron
P-U.....	Heavy Duty Pillow Block, Gray Cast Iron
PE-U.....	Heavy Duty Expansion Pillow Block, Gray Cast Iron
AO.....	Heavy Duty Pillow Block, Gray Cast Iron
SAO.....	Heavy Duty Pillow Block, Gray Cast Iron
FL300.....	Heavy Duty 2 Bolt Flange, Gray Cast Iron
F300.....	Heavy Duty 4 Bolt Flange, Gray Cast Iron
FS.....	Heavy Duty 4 Bolt Flange with Pilot, Gray Cast Iron
CJO.....	Heavy Duty 4 Bolt Flange, Gray Cast Iron
T300.....	Heavy Duty Take-Up, Gray Cast Iron
C300.....	Heavy Duty Cartridge, Gray Cast Iron
P000.....	Silver Series, Pillow Block, Zinc Alloy
FL000.....	Silver Series, 2 Bolt Flange, Zinc Alloy
ME.....	Piloted Flange Cartridge, Gray Cast Iron
SHE.....	Tapped Base Pillow Block, Gray Cast Iron
RCSM.....	Cartridge, Rubber
SP.....	Pillow Block, Gray Cast Iron

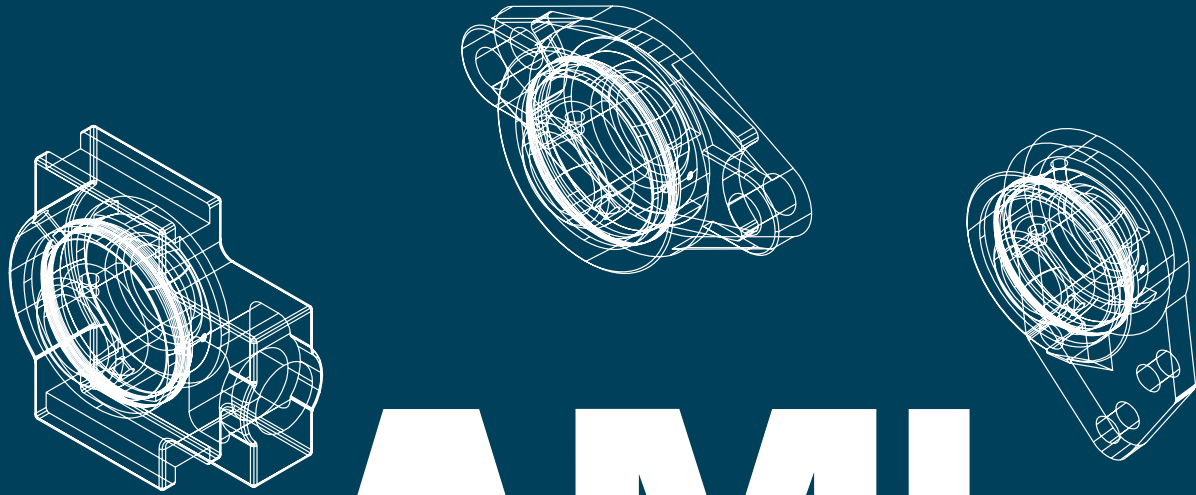

AMI

Normal Duty

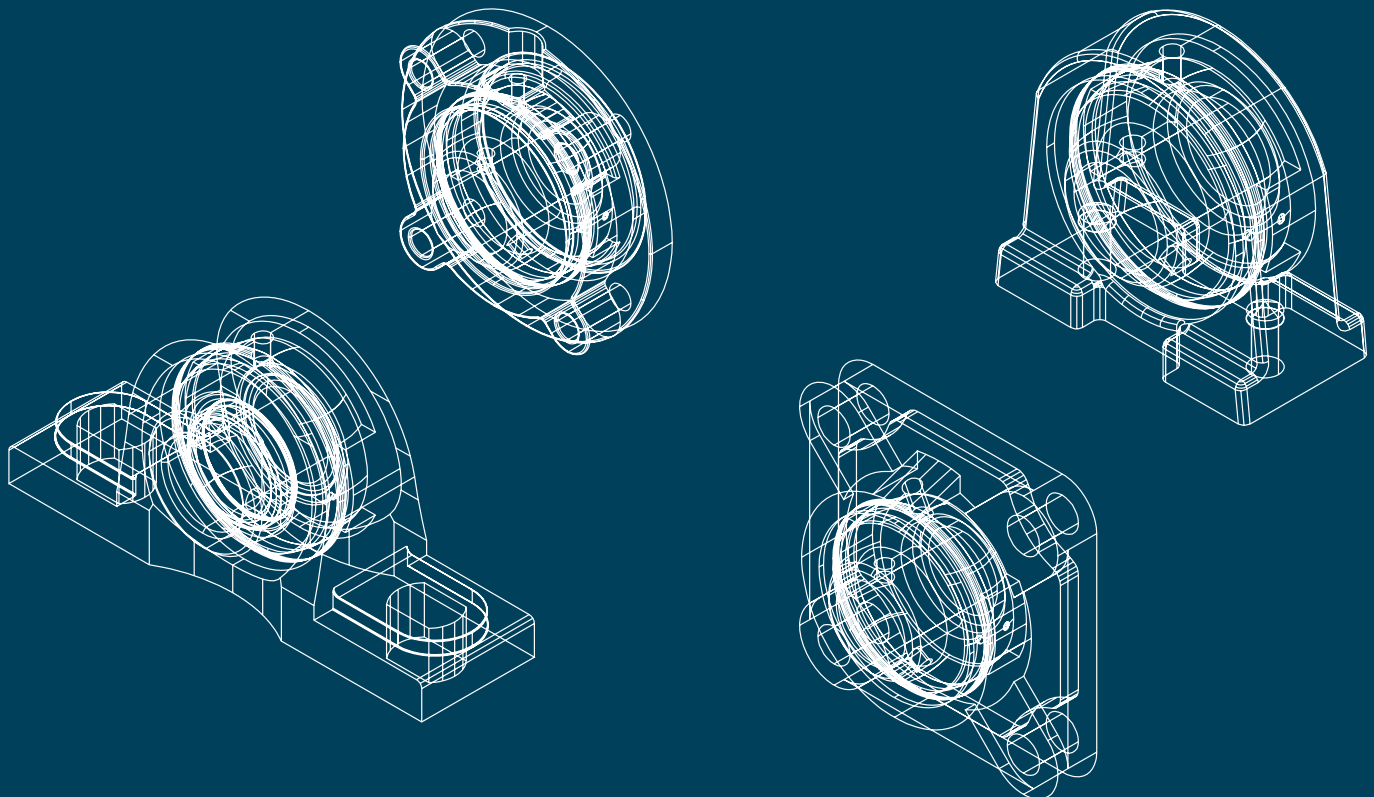





PILLOW BLOCKS

UCP 200

NORMAL DUTY



Set-Screw Locking
Wide Inner Ring
Cast Iron Housing
Insert Detail-pg.121-122
Covers Available-pg.60
Inch and Metric

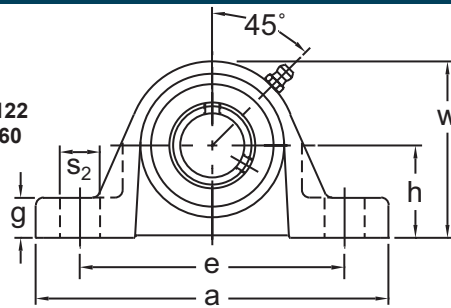

Shaft Diam. (in.)	AMI Unit #	List Price	Dimensions (in.)										Bolt Size (in.)	Bearing #	Housing #	Weight (lb.)
			h	a	e		b	s1	s2	g	w	Bi				
1/2	UCP201-8	44.50	1-3/16	5	3-3/8	4-1/8	1-1/2	1/2	3/4	19/32	2-7/16	1.220	3/8	UC201-8	P203T	1.43
5/8	UCP202-10													UC202-10		1.39
11/16	UCP203-11													UC203-11		1.37
3/4	UCP204-12	44.50	1-5/16	5	3-3/8	4-1/8	1-1/2	1/2	3/4	19/32	2-9/16	1.220	3/8	UC204-12	P204T	1.43
7/8	UCP205-14	49.00												UC205-14		
15/16	UCP205-15	49.00	1-7/16	5-1/2	3-3/4	4-1/2	1-1/2	1/2	3/4	5/8	2-3/4	1.339	3/8	UC205-15	P205T	1.74
1	UCP205-16	46.65												UC205-16		
1-1/16	UCP206-17	64.95												UC206-17		
1-1/8	UCP206-18		1-11/16	6-1/2	4-7/16	5-1/16	1-7/8	21/32	13/16	23/32	3-9/32	1.500	1/2	UC206-18	P206T	2.87
1-3/16	UCP206-19													UC206-19		
1-1/4	UCP206-20													UC206-20		
1-1/4	UCP207-20	75.45												UC207-20		
1-5/16	UCP207-21		1-7/8	6-9/16	4-11/16	5-5/16	1-7/8	21/32	13/16	3/4	3-11/16	1.689	1/2	UC207-21	P207T	3.53
1-3/8	UCP207-22													UC207-22		
1-7/16	UCP207-23													UC207-23		
1-1/2	UCP208-24	89.40												UC208-24		
1-9/16	UCP208-25		1-15/16	7-1/4	4-7/8	5-7/8	2-1/8	21/32	1	3/4	3-15/16	1.937	1/2	UC208-25	P208T	4.41
1-1/2	UCP209-24	99.60												UCX08-24		5.07
1-5/8	UCP209-26		2-1/8	7-1/2	5-3/8	6-1/8	2-1/8	21/32	7/8	25/32	4-1/4	1.937	1/2	UC209-26	P209T	5.35
1-11/16	UCP209-27													UC209-27		5.35
1-3/4	UCP209-28													UC209-28		5.35
1-7/8	UCP210-30	118.35												UC210-30		
1-15/16	UCP210-31		2-1/4	8-1/8	5-7/8	6-5/8	2-3/8	25/32	1	7/8	4-1/2	2.031	5/8	UC210-31	P210T	5.95
2	UCP210-32													UC210-32		
2	UCP211-32	146.85												UC211-32		
2-1/8	UCP211-34		2-1/2	8-5/8	6-3/8	7-1/8	2-3/8	25/32	1	7/8	4-31/32	2.189	5/8	UC211-34	P211T	7.27
2-3/16	UCP211-35													UC211-35		
2-1/4	UCP212-36	189.85												UC212-36		
2-3/8	UCP212-38		2-3/4	9-1/2	6-7/8	7-5/8	2-3/4	25/32	1	1	5-7/16	2.563	5/8	UC212-38	P212T	10.36
2-7/16	UCP212-39													UC212-39		
2-1/2	UCP213-40	244.60	3	10-7/16	7-19/32	8-13/32	2-3/4	1	1-5/32	1-1/16	5-29/32	2.563	3/4	UC213-40	P213T	12.34
2-11/16	UCP214-43	294.40												UC214-43		
2-3/4	UCP214-44		3-1/8	10-1/2	7-25/32	8-23/32	2-13/16	1	1-7/32	1-1/16	6-5/32	2.937	3/4	UC214-44	P214T	16.09
2-15/16	UCP215-47	399.10												UC215-47		
3	UCP215-48		3-1/4	10-13/16	8-1/32	8-31/32	2-15/16	1	1-7/32	1-3/32	6-13/32	3.063	3/4	UC215-48	P215T	17.41
3-1/4	UCP217-52	595.50												UC217-52		
3-7/16	UCP217-55		3-3/4	12-3/16	9-9/32	10-7/32	3-1/4	1	1-7/32	1-1/4	7-3/8	3.374	3/4	UC217-55	P217T	26.89
3-1/2	UCP218-56	717.10	4	12-7/8	9-13/16	10-11/16	3-1/2	1-1/16	1-5/16	1-11/32	7-7/8	3.780	7/8	UC218-56	P218T	32.40
Dimensions (mm)																
12	UCP201	44.50												UC201		1.45
15	UCP202		30.2	127	86	105	38	13	19	15	62	31	M10	UC202	P203T	1.40
17	UCP203													UC203		1.38
20	UCP204	44.50	33.3	127	86	105	38	13	19	15	65	31	M10	UC204	P204T	1.45
25	UCP205	49.00	36.5	140	95	114	38	13	19	16	70	34	M10	UC205	P205T	1.76
30	UCP206	64.95	42.9	165	113	129	48	17	21	18	83	38.1	M14	UC206	P206T	2.90
35	UCP207	75.45	47.6	167	119	135	48	17	21	19	94	42.9		UC207	P207T	3.57
40	UCP208	89.40	49.2	184	124	149	54	17	25	19	100	49.2	M14	UC208	P208T	4.46
45	UCP209	99.60	54	190	137	156	54	17	22	20	108	49.2		UC209	P209T	5.13
50	UCP210	118.35	57.2	206	149	168	60	20	25	22	114	51.6		UC210	P210T	6.02
55	UCP211	146.85	63.5	219	162	181	60	20	25	22	126	55.6	M16	UC211	P211T	7.36
60	UCP212	189.85	69.8	241	175	194	70	20	25	25	138	65.1		UC212	P212T	10.5
65	UCP213	244.60	76.2	265	193	214	70	25	29	27	150	65.1		UC213	P213T	12.5
70	UCP214	294.40	79.4	266	198	222	72	25	31	27	156	74.6	M20	UC214	P214T	16.3
75	UCP215	399.10	82.6	275	204	228	74	25	31	28	163	77.8		UC215	P215T	17.6
80	UCP216	552.10	88.9	292	220	244	78	25	31	30	175	82.6	M20	UC216	P216T	22.3
85	UCP217	595.50	95.2	310	236	260	83	25	31	32	187	85.7	M20	UC217	P217T	27.2
90	UCP218	717.10	101.6	327	249	272	88	27	33	34	200	96	M22	UC218	P218T	32.8

Lubrication fitting tap size for 1" and smaller shaft sizes, 1/4-28 UNF; for all other sizes, 1/8-27 NPT

INTERCHANGES: VPS-2 P2B-SC YAS P3-UN SY-TF UCP NP

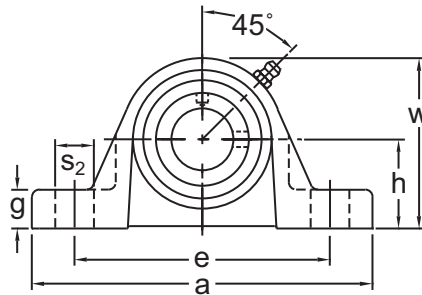

**Eccentric Locking
Wide Inner Ring
Cast Iron Housing
Insert Detail-pg.124
Inch and Metric**

Shaft Diam. (in.)	AMI Unit #	List Price	Dimensions (in.)										Bolt Size (in.)	Bearing #	Housing #	Weight (lb.)
			h	a	e		b	s ₁	s ₂	g	w	L				
					Min.	Max.										
3/4	UGP204-12	54.80	1-5/16	5	3-3/8	4-1/8	1-1/2	1/2	3/4	19/32	2-9/16	1-23/32	3/8	UG204-12	P204T	1.43
7/8	UGP205-14	62.60	1-7/16	5-1/2	3-3/4	4-1/2	1-1/2	1/2	3/4	5/8	2-3/4	1-3/4	3/8	UG205-14	P205T	1.74
15/16	UGP205-15													UG205-15		
1	UGP205-16													UG205-16		
1-1/8	UGP206-18	77.90	1-11/16	6-1/2	4-7/16	5-1/16	1-7/8	21/32	13/16	23/32	3-9/32	1-29/32	1/2	UG206-18	P206T	2.87
1-3/16	UGP206-19													UG206-19		
1-1/4	UGP206-20													UG206-20		
1-1/4	UGP207-20	95.20	1-7/8	6-9/16	4-11/16	5-5/16	1-7/8	21/32	13/16	3/4	3-11/16	2-1/64	1/2	UG207-20	P207T	3.53
1-3/8	UGP207-22													UG207-22		
1-7/16	UGP207-23													UG207-23		
1-1/2	UGP208-24	107.90	1-15/16	7-1/4	4-7/8	5-7/8	2-1/8	21/32	1	3/4	3-15/16	2-7/32	1/2	UG208-24	P208T	4.41
1-5/8	UGP209-26	116.80	2-1/8	7-1/2	5-3/8	6-1/8	2-1/8	21/32	7/8	25/32	4-1/4	2-7/32	1/2	UG209-26	P209T	5.07
1-11/16	UGP209-27													UG209-27		
1-3/4	UGP209-28													UG209-28		
1-7/8	UGP210-30	150.60	2-1/4	8-1/8	5-7/8	6-5/8	2-3/8	25/32	1	7/8	4-1/2	2-15/32	5/8	UG210-30	P210T	5.95
1-15/16	UGP210-31													UG210-31		
2	UGP210-32													UG210-32		
2	UGP211-32	197.00	2-1/2	8-5/8	6-3/8	7-1/8	2-3/8	25/32	1	7/8	4-31/32	2-13/16	5/8	UG211-32	P211T	7.27
2-1/8	UGP211-34													UG211-34		
2-3/16	UGP211-35													UG211-35		
2-1/4	UGP212-36	244.20	2-3/4	9-1/2	6-7/8	7-5/8	2-3/4	25/32	1	1	5-7/16	3-1/16	5/8	UG212-36	P212T	10.36
2-3/8	UGP212-38													UG212-38		
2-7/16	UGP212-39													UG212-39		
Dimensions (mm)																
20	UGP204	54.80	33.3	127	86	105	38	13	19	15	65	43.7	M10	UG204	P204T	1.43
25	UGP205	62.60	36.5	140	95	114	38	13	19	16	70	44.4	M10	UG205	P205T	1.74
30	UGP206	77.90	42.9	165	113	129	48	17	21	18	83	48.4	M14	UG206	P206T	2.87
35	UGP207	95.20	47.6	167	119	135	48	17	21	19	94	51.1	M14	UG207	P207T	3.53
40	UGP208	107.90	49.2	184	124	149	54	17	25	19	100	56.3		UG208	P208T	4.41
45	UGP209	116.80	54	190	137	156	54	17	22	20	108	56.3		UG209	P209T	5.07
50	UGP210	150.60	57.2	206	149	168	60	20	25	22	114	62.7	M16	UG210	P210T	5.95
55	UGP211	197.00	63.5	219	162	181	60	20	25	22	126	71.4		UG211	P211T	7.27
60	UGP212	244.20	69.8	241	175	194	70	20	25	25	138	77.8		UG212	P212T	10.36

*Consult factory for availability

Lubrication fitting tap size for 1" and smaller shaft sizes, 1/4-28 UNF; for all other sizes, 1/8-27 NPT

INTERCHANGES: VPE-2 P2B-SXR RAS P3Y-N SY-WF UELP RP-E





PILLOW BLOCKS


BP / KHP 200

NORMAL DUTY

Set-Screw/Eccentric Locking
Narrow Inner Ring
Cast Iron Housing
Insert Detail-pg.125,126
Inch and Metric

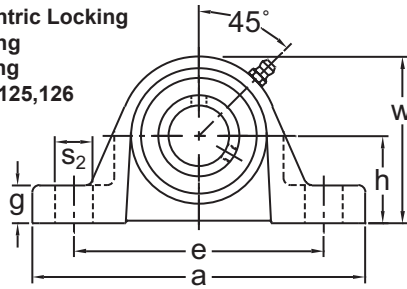

BP 200 Type
Set-Screw Locking



KHP 200 Type
Eccentric Collar Locking





Shaft Diam. (in.)	AMI Unit # Complete with B 200 Type	List Price	AMI Unit # Complete with KH 200 Type	List Price	Dimensions (in.)												Bolt Size (in.)	Bearing #		Housing #	Weight (lb.)
					h	a	e		b	s ₁	s ₂	g	w	BI	L	B		KH			
							Min.	Max.													
3/4	BP204-12	42.60	KHP204-12	43.20	1-5/16	5	3-3/8	4-1/8	1-1/2	1/2	3/4	19/32	2-9/16	0.972	1-7/32	3/8	B4-12	KH204-12	P204T	1.43	
7/8	BP205-14	45.20	KHP205-14	47.10	1-7/16	5-1/2	3-3/4	4-1/2	1-1/2	1/2	3/4	5/8	2-3/4	1.063	1-7/32	3/8	B5-14	KH205-14	P205T	1.76	
15/16	BP205-15	45.20	KHP205-15														B5-15	KH205-15			
1	BP205-16	42.85	KHP205-16														B5-16	KH205-16			
1-1/8	BP206-18	63.20	KHP206-18	66.45	1-11/16	6-1/2	4-7/16	5-1/16	1-7/8	21/32	13/16	23/32	3-9/32	1.193	1-13/32	1/2	B6-18	KH206-18	P206T	2.87	
1-3/16	BP206-19		KHP206-19														B6-19	KH206-19			
1-1/4	BP206-20		KHP206-20														B6-20	KH206-20			
1-1/4	BP207-20	72.60	KHP207-20	80.00	1-7/8	6-9/16	4-11/16	5-5/16	1-7/8	21/32	13/16	3/4	3-11/16	1.295	1-17/32	1/2	B7-20	KH207-20	P207T	3.55	
1-5/16	BP207-21		KHP207-21														B7-21	KH207-21			
1-3/8	BP207-22		KHP207-22														B7-22	KH207-22			
1-7/16	BP207-23		KHP207-23														B7-23	KH207-23			
1-1/2	BP208-24	101.35	KHP208-24	91.20	1-15/16	7-1/4	4-7/8	5-7/8	2-1/8	21/32	1	3/4	3-15/16	1.398	1-23/32	1/2	B8-24	KH208-24	P208T	4.41	
1-5/8	—	—	KHP209-26	103.65	2-1/8	7-1/2	5-3/8	6-1/8	2-1/8	21/32	7/8	25/32	4-1/4	—	1-23/32	1/2	—	KH209-26	P209T	5.02	
1-11/16			KHP209-27															KH209-27			
1-3/4			KHP209-28															KH209-28			
1-7/8	—	—	KHP210-30	119.40	2-1/4	8-1/8	5-7/8	6-5/8	2-3/8	25/32	1	7/8	4-1/2	—	1-23/32	5/8	—	KH210-30	P210T	5.88	
1-15/16			KHP210-31															KH210-31			
2			KHP211-32															KH211-32			
2-3/16	—	—	KHP211-35	160.10	2-1/2	8-5/8	6-3/8	7-1/8	2-3/8	25/32	1	7/8	4-31/32	—	1-29/32	5/8	—	KH211-35	P211T	7.07	
Dimensions (mm)																					
20	BP204	42.60	KHP204	43.20	33.3	127	86	105	38	13	19	15	65	24.7	31	M10	B4	KH204	P204T	1.43	
25	BP205	45.20	KHP205	47.10	36.5	140	95	114	38	13	19	16	70	27	31	M10	B5	KH205	P205T	1.76	
30	BP206	63.20	KHP206	66.45	42.9	165	113	129	48	17	21	18	83	30.3	35.7	M14	B6	KH206	P206T	2.87	
35	BP207	72.60	KHP207	80.00	47.6	167	119	135	48	17	21	19	94	32.9	38.9	M14	B7	KH207	P207T	3.55	
40	BP208	101.35	KHP208	91.20	49.2	184	124	149	54	17	25	19	100	35.5	43.7		B8	KH208	P208T	4.41	
45	—	—	KHP209	103.65	54	190	137	156	54	17	22	20	108	—	43.7		—	KH209	P209T	5.02	
50	—	—	KHP210	119.40	57.2	206	149	168	60	20	25	22	114	—	43.7	M16	—	KH210	P210T	5.88	
55			KHP211	160.10	63.5	219	162	181	60	20	25	22	126					KH211	P211T	7.07	

*Consult factory for availability

Lubrication fitting tap size for 1" and smaller shaft sizes, 1/4-28 UNF; for all other sizes, 1/8-27 NPT

INTERCHANGES: ASP AELP VPE-1 P2B-SXV VAS P3W-U SY-FM VP-E

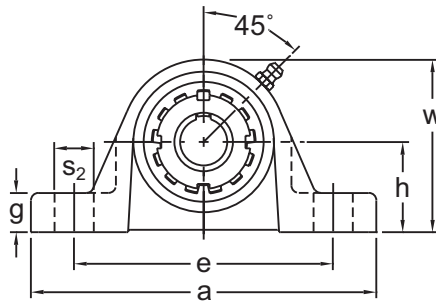

**Tapered Adapter Sleeve
Wide Inner Ring
Cast Iron Housing
Insert Detail-pg.128
Inch and Metric**

Shaft Diam. (in.)	AMI Unit #	List Price	Dimensions (in.)										Bolt Size (in.)	Bearing #	Housing #	Weight (lb.)
			h	a	e		b	s1	s2	g	w	L				
3/4 13/16	UKP205+HE2305 UKP205+HA2305	87.10	1-7/16	5-1/2	3-3/4	4-1/2	1-1/2	1/2	3/4	5/8	2-3/4	1.378	3/8	UK205+HE2305 UK205+HA2305	P205T	1.85
7/8 15/16 1	UKP206+HS2306 UKP206+HA2306 UKP206+HE2306	106.50	1-11/16	6-1/2	4-7/16	5-1/16	1-7/8	21/32	13/16	23/32	3-9/32	1.496	1/2	UK206+HS2306 UK206+HA2306 UK206+HE2306	P206T	3.09
1-1/8 1-3/16	UKP207+HS2307 UKP207+HA2307	121.70	1-7/8	6-9/16	4-11/16	5-5/16	1-7/8	21/32	13/16	3/4	3-11/16	1.693	1/2	UK207+HS2307 UK207+HA2307	P207T	3.53
1-1/4 1-5/16 1-3/8	UKP208+HE2308 UKP208+HA2308 UKP208+HS2308	141.60	1-15/16	7-1/4	4-7/8	5-7/8	2-1/8	21/32	1	3/4	3-15/16	1.811	1/2	UK208+HE2308 UK208+HA2308 UK208+HS2308	P208T	4.63
1-7/16 1-1/2 1-5/8	UKP209+HA2309 UKP209+HE2309 UKP209+HS2309	152.40	2-1/8	7-1/2	5-3/8	6-1/8	2-1/8	21/32	7/8	25/32	4-1/4	1.969	1/2	UK209+HA2309 UK209+HE2309 UK209+HS2309	P209T	5.29
1-11/16 1-3/4	UKP210+HA2310 UKP210+HE2310	176.90	2-1/4	8-1/8	5-7/8	6-5/8	2-3/8	25/32	1	7/8	4-1/2	2.165	5/8	UK210+HA2310 UK210+HE2310	P210T	6.17
1-7/8 1-15/16 2	UKP211+HS2311 UKP211+HA2311 UKP211+HE2311	234.50	2-1/2	8-5/8	6-3/8	7-1/8	2-3/8	25/32	1	7/8	4-31/32	2.323	5/8	UK211+HS2311 UK211+HA2311 UK211+HE2311	P211T	7.49
2-1/16 2-1/8	UKP212+HA2312 UKP212+HS2312	290.00	2-3/4	9-1/2	6-7/8	7-5/8	2-3/4	25/32	1	1	5-7/16	2.441	5/8	UK212+HA2312 UK212+HS2312	P212T	10.58
2-3/16 2-1/4 2-3/8	UKP213+HA2313 UKP213+HE2313 UKP213+HS2313	317.50	3	10-7/16	7-19/32	8-13/32	2-3/4	1	1-5/32	1-1/16	5-29/32	2.559	3/4	UK213+HA2313 UK213+HE2313 UK213+HS2313	P213T	12.56
2-7/16 2-1/2	UKP215+HA2315 UKP215+HE2315	513.50	3-1/4	10-13/16	8-1/32	8-31/32	2-15/16	1	1-7/32	1-3/32	6-13/32	2.874	3/4	UK215+HA2315 UK215+HE2315	P215T	18.29
2-3/4	UKP216+HE2316	522.80	3-1/2	11-1/2	8-21/32	9-19/32	3-1/16	1	1-7/32	1-3/16	6-7/8	3.071	3/4	UK216+HE2316	P216T	22.92
2-15/16 3	UKP217+HA2317 UKP217+HE2317	629.40	3-3/4	12-3/16	9-9/32	10-7/32	3-1/4	1	1-7/32	1-1/4	7-3/8	3.228	3/4	UK217+HA2317 UK217+HE2317	P217T	28.21
3-1/8	UKP218+HS2318	774.80	4	12-7/8	9-13/16	10-11/16	3-1/2	1-1/16	1-5/16	1-11/32	7-7/8	3.386	7/8	UK218+HS2318	P218T	33.28
Dimensions (mm)																
20	UKP205+H2305	87.10	36.5	140	95	114	38	13	19	16	70	35	M10	UK205+H2305	P205T	1.85
25	UKP206+H2306	106.50	42.9	165	113	129	48	17	21	18	83	38	M14	UK206+H2306	P206T	3.09
30	UKP207+H2307	121.70	47.6	167	119	135	48	17	21	19	94	43	M14	UK207+H2307	P207T	3.53
35	UKP208+H2308	141.60	49.2	184	124	149	54	17	25	19	100	46	M14	UK208+H2308	P208T	4.63
40	UKP209+H2309	152.40	54	190	137	156	54	17	22	20	108	50	M14	UK209+H2309	P209T	5.29
45	UKP210+H2310	176.90	57.2	206	149	168	60	20	25	22	114	55	M16	UK210+H2310	P210T	6.17
50	UKP211+H2311	234.50	63.5	219	162	181	60	20	25	22	126	59	M16	UK211+H2311	P211T	7.49
55	UKP212+H2312	290.00	69.8	241	175	194	70	20	25	25	138	62	M16	UK212+H2312	P212T	10.58
60	UKP213+H2313	317.50	76.2	265	193	214	70	25	29	27	150	65	M20	UK213+H2313	P213T	12.56
65	UKP215+H2315	513.50	82.6	275	204	228	74	25	31	28	163	73		UK215+H2315	P215T	18.29
70	UKP216+H2316	522.80	88.9	292	220	244	78	25	31	30	175	78	M20	UK216+H2316	P216T	22.92
75	UKP217+H2317	629.40	95.2	310	236	260	83	25	31	32	187	82		UK217+H2317	P217T	28.21
80	UKP218+H2318	774.80	101.6	327	249	272	88	27	33	34	200	86	M22	UK218+H2318	P218T	33.28

Lubrication fitting tap size for 1" and smaller shaft sizes, 1/4-28 UNF; for all other sizes, 1/8-27 NPT

INTERCHANGES: UKP





PILLOW BLOCKS

UGAKH 200

NORMAL DUTY

Eccentric Locking
Wide Inner Ring
Cast Iron Housing
Insert Detail-pg.124
Inch and Metric


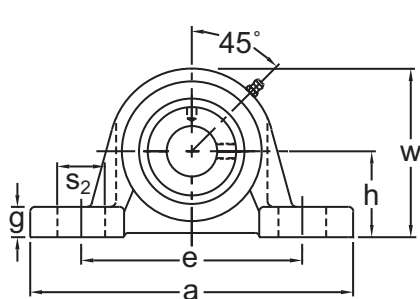


Shaft Diam. (in.)	AMI Unit #	List Price	Dimensions (in.)										Bolt Size (in.)	Bearing #	Housing #	Weight (lb.)
			h	a	e		b	s ₁	s ₂	g	w	L				
					Min.	Max.										
7/8	UGAKH205-14	96.60	1-3/4	6-1/4	4.141	5.109	2.000	0.591	0.984	0.709	3.500	1-3/4	1/2	UG205-14	AKH205	3.37
15/16	UGAKH205-15													UG205-15		
1	UGAKH205-16													UG205-16		
1-1/8	UGAKH206-18	120.90	1-7/8	6-57/64	4.516	5.484	2.250	0.591	0.984	0.709	3.819	1-29/32	1/2	UG206-18	AKH206	4.6
1-3/16	UGAKH206-19													UG206-19		
1-1/4	UGAKH206-20													UG206-20		
1-1/4	UGAKH207-20	133.60	2-1/8	8	4.788	6.150	2.250	0.669	1.181	0.748	4.173	2-1/64	1/2	UG207-20	AKH207	6.08
1-3/8	UGAKH207-22													UG207-22		
1-7/16	UGAKH207-23													UG207-23		
1-1/2	UGAKH208-24	204.00	2-5/16	8-3/4	5.500	6.750	2.598	0.669	1.250	0.787	4.567	2-7/32	5/8	UG208-24	AKH208	7.98
1-5/8	UGAKH209-26	237.00	2-5/16	8-3/4	5.500	6.750	2.598	0.669	1.250	0.787	4.567	2-7/32	5/8	UG209-26	AKH209	7.82
1-11/16	UGAKH209-27													UG209-27		
1-3/4	UGAKH209-28													UG209-28		
1-7/8	UGAKH210-30	265.80	2-1/2	9-1/2	5.918	7.582	2.875	0.669	1.457	0.866	5.079	2-15/32	5/8	UG210-30	AKH210	10.11
1-15/16	UGAKH210-31													UG210-31		
2	UGAKH210-32													UG210-32		
2	UGAKH211-32	322.95	2-3/4	10-1/4	6.425	8.075	3.110	0.984	1.575	1.102	5.591	2-13/16	3/4	UG211-32	AKH211	13.86
2-1/8	UGAKH211-34													UG211-34		
2-3/16	UGAKH211-35													UG211-35		
2-1/4	UGAKH212-36	398.70	3	11-1/4	7.156	9.594	3.250	1.024	1.969	1.102	6.339	3-1/16	3/4	UG212-36	AKH212	17.29
2-3/8	UGAKH212-38													UG212-38		
2-7/16	UGAKH212-39													UG212-39		
Dimensions (mm)																
25	UGAKH205	96.60	44.4	158	105	130	51	15	25	18	89	44.4	M14	UG205	AKH205	3.37
30	UGAKH206	120.90	47.6	175	115	139	57	15	25	18	97	48.4		UG206	AKH206	4.60
35	UGAKH207	133.60	54.0	203	122	156	57	17	30	19	106	51.1	M14	UG207	AKH207	6.08
40	UGAKH208	204.00	58.7	222	140	172	66	17	32	20	116	56.3	M16	UG208	AKH208	7.98
45	UGAKH209	237.00	58.7	222	140	172	66	17	32	20	116	56.3	M16	UG209	AKH209	7.82
50	UGAKH210	265.80	63.5	241	150	193	73	17	37	22	129	62.7	M16	UG210	AKH210	10.11
55	UGAKH211	322.95	69.8	260	163	205	79	25	40	28	142	71.4	M20	UG211	AKH211	13.86
60	UGAKH212	398.70	76.2	286	182	244	82	26	50	28	161	77.8	M20	UG212	AKH212	17.29

*Consult factory for availability

Lubrication fitting tap size for 1" and smaller shaft sizes, 1/4-28 UNF; for all other sizes, 1/8-27 NPT

INTERCHANGES: RAKH

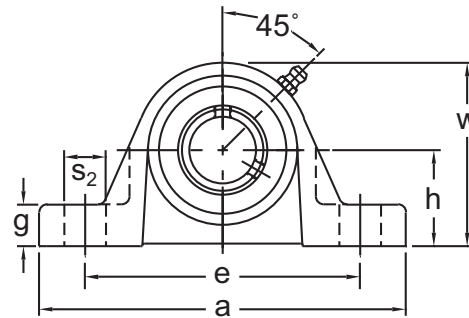


**Set-Screw Locking
Wide Inner Ring
Cast Iron Housing
Low Shaft Height
Insert detail-pg.121-122
Covers Available-pg.60
Inch and Metric**

Shaft Diam. (in.)	AMI Unit #	List Price	Dimensions (in.)										Bolt Size (in.)	Bearing #	Housing #	Weight (lb.)
			h	a	e		b	s ₁	s ₂	g	w	Bi				
1/2	UCLP201-8	44.50	1-1/16	4-3/4	3-1/4	3-3/4	1-1/8	1/2	5/8	1/2	2-3/16	1.024	3/8	UCW201-8	LP203T	1.10
9/16	UCLP202-9													UCW202-9		1.08
5/8	UCLP202-10													UCW202-10		1.08
11/16	UCLP203-11													UCW203-11		1.06
3/4	UCLP204-12	44.50	1-1/4	5-1/4	3-1/2	4-1/4	1-1/4	1/2	3/4	1/2	2-9/16	1.220	3/8	UC204-12	LP204T	1.48
7/8	UCLP205-14	49.00	1-5/16	5-1/2	3-3/4	4-1/2	1-1/2	1/2	3/4	5/8	2-11/16	1.339	3/8	UC205-14	LP205T	1.76
15/16	UCLP205-15	49.00												UC205-15		
1	UCLP205-16	46.65												UC205-16		
1-1/16	UCLP206-17	64.95	1-9/16	6-1/2	4-1/2	5-1/4	1-5/8	19/32	7/8	11/16	3-3/16	1.500	1/2	UC206-17	LP206T	2.64
1-1/8	UCLP206-18													UC206-18		
1-3/16	UCLP206-19													UC206-19		
1-1/4	UCLP206-20													UC206-20		
1-1/4	UCLP207-20	75.45	1-13/16	7	5	5-3/4	1-7/8	19/32	7/8	3/4	3-11/16	1.689	1/2	UC207-20	LP207T	4.19
1-5/16	UCLP207-21													UC207-21		
1-3/8	UCLP207-22													UC207-22		
1-7/16	UCLP207-23													UC207-23		
1-1/2	UCLP208-24	89.40	1-15/16	7-1/4	5-1/4	6	2	19/32	7/8	13/16	3-15/16	1.937	1/2	UC208-24	LP208T	4.85
1-9/16	UCLP208-25													UC208-25		
1-5/8	UCLP209-26	99.60	2-1/16	7-3/4	5-1/2	6-1/2	2-1/8	19/32	1	13/16	4-3/16	1.937	1/2	UC209-26	LP209T	5.29
1-11/16	UCLP209-27													UC209-27		
1-3/4	UCLP209-28													UC209-28		
1-7/8	UCLP210-30	118.35	2-3/16	8-3/8	6	7	2-1/4	19/32	1	7/8	4-7/16	2.031	1/2	UC210-30	LP210T	6.39
1-15/16	UCLP210-31													UC210-31		
2	UCLP210-32													UC210-32		
2	UCLP211-32	146.85	2-7/16	9-1/4	6-5/8	7-5/8	2-1/2	3/4	1-1/8	1	4-15/16	2.189	5/8	UC211-32	LP211T	8.82
2-1/8	UCLP211-34													UC211-34		
2-3/16	UCLP211-35													UC211-35		
2-1/4	UCLP212-36	189.85	2-11/16	9-3/4	7-1/8	8-1/8	2-3/4	3/4	1-1/8	1-1/8	5-7/16	2.563	5/8	UC212-36	LP212T	11.68
2-3/8	UCLP212-38													UC212-38		
2-7/16	UCLP212-39													UC212-39		
2-1/2	UCLP213-40	244.60	2-11/16	9-3/4	7-1/8	8-1/8	2-3/4	3/4	1-1/8	1-1/8	5-7/16	2.563	5/8	UC213-40	LP213T	11.24
Dimensions (mm)																
12	UCLP201	44.50	27	121	83	95	29	12	16	13	56	26	M10	UCW201	LP203T	1.10
15	UCLP202													UCW202		1.08
17	UCLP203													UCW203		1.06
20	UCLP204	44.50	31.8	133	89	108	32	12	19	13	65	31	M10	UC204	LP204T	1.48
25	UCLP205	49.00	33.3	140	95	114	38	12	19	16	68	34	M10	UC205	LP205T	1.76
30	UCLP206	64.95	39.7	165	114	133	41	15	22	17	81	38.1	M12	UC206	LP206T	2.64
35	UCLP207	75.45	46	178	127	146	48	15	22	19	94	42.9	M12	UC207	LP207T	4.19
40	UCLP208	89.40	49.2	184	133	152	51	15	22	21	100	49.2		UC208	LP208T	4.85
45	UCLP209	99.60	52.4	197	140	165	54	15	25	21	106	49.2		UC209	LP209T	5.29
50	UCLP210	118.35	55.6	213	152	178	57	15	25	22	113	51.6	M12	UC210	LP210T	6.39
55	UCLP211	146.85	61.9	235	168	194	64	19	29	25	125	55.6	M16	UC211	LP211T	8.82
60	UCLP212	189.85	68.3	248	181	206	70	19	29	29	138	65.1	M16	UC212	LP212T	11.68
65	UCLP213	244.60	68.3	248	181	206	70	19	29	29	138	65.1	M16	UC213	LP213T	11.24

Lubrication fitting tap size for 1" and smaller shaft sizes, 1/4-28 UNF; for all other sizes, 1/8-27 NPT

INTERCHANGES: VPLS-2 P2B-SCB YAK PL3U-N CL25 SYH-TF UCLP NPL





LOW BASE PILLOW BLOCKS


BLP / KHLP 200

NORMAL DUTY

Set-Screw/Eccentric Locking
Narrow Inner Ring
Cast Iron Housing
Low Shaft Height
Insert Detail-pg.125,126
Inch and Metric

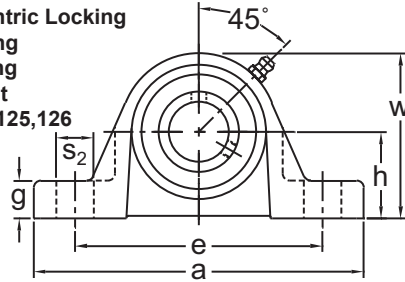

BLP 200 Type
Set-Screw Locking






KHLP 200 Type
Eccentric Collar Locking



Shaft Diam. (in.)	AMI Unit # Complete with B 200 Type	List Price	AMI Unit # Complete with KH 200 Type	List Price	Dimensions (in.)											Bolt Size (in.)	Bearing #		Housing #	Weight (lb.)
					h	a	e		b	s ₁	s ₂	g	w	Bi	L		B	KH		
1/2	BLP201-8	42.60	KHLP201-8	43.20	1-1/16	4-3/4	3-1/4	3-3/4	1-1/8	1/2	5/8	1/2	2-3/16	0.866	1-1/8	3/8	B1-8	KH201-8	LP203T	0.90
5/8	BLP202-10		KHLP202-10		1-1/4	5-1/4	3-1/2	4-1/4	1-1/4	1/2	3/4	1/2	2-9/16	0.972	1-7/32	3/8	B2-10	KH202-10	LP204T	1.48
3/4	BLP204-12	42.60	KHLP204-12	43.20	1-1/4	5-1/4	3-1/2	4-1/4	1-1/4	1/2	3/4	1/2	2-9/16	0.972	1-7/32	3/8	B4-12	KH204-12	LP204T	1.48
7/8	BLP205-14	45.20	KHLP205-14	47.10	1-5/16	5-1/2	3-3/4	4-1/2	1-1/2	1/2	3/4	5/8	2-11/16	1.063	1-7/32	3/8	B5-14	KH205-14	LP205T	1.74
15/16	BLP205-15	45.20	KHLP205-15														B5-15	KH205-15		
1	BLP205-16	42.85	KHLP205-16														B5-16	KH205-16		
1-1/16	BLP206-17	63.20	—	66.45	1-9/16	6-1/2	4-1/2	5-1/4	1-5/8	19/32	7/8	11/16	3-3/16	1.193	1-13/32	1/2	B6-17	—	LP206T	2.64
1-1/8	BLP206-18		KHLP206-18														B6-18	KH206-18		
1-3/16	BLP206-19		KHLP206-19														B6-19	KH206-19		
1-1/4	BLP206-20		KHLP206-20														B6-20	KH206-20		
1-1/4	BLP207-20	72.60	KHLP207-20	80.00	1-13/16	7	5	5-3/4	1-7/8	19/32	7/8	3/4	3-11/16	1.295	1-17/32	1/2	B7-20	KH207-20	LP207T	4.21
1-5/16	BLP207-21		KHLP207-21														B7-21	KH207-21		
1-3/8	BLP207-22		KHLP207-22														B7-22	KH207-22		
1-7/16	BLP207-23		KHLP207-23														B7-23	KH207-23		
1-1/2	BLP208-24	101.35	KHLP208-24	91.20	1-15/16	7-1/4	5-1/4	6	2	19/32	7/8	13/16	3-15/16	1.398	1-23/32	1/2	B8-24	KH208-24	LP208T	4.85
1-5/8	—	—	KHLP209-26	103.65	2-1/16	7-3/4	5-1/2	6-1/2	2-1/8	19/32	1	13/16	4-3/16	—	1-23/32	1/2	—	KH209-26	LP209T	5.24
1-11/16	—		KHLP209-27														—	KH209-27		
1-3/4	—	—	KHLP209-28	119.40	2-3/16	8-3/8	6	7	2-1/4	19/32	1	7/8	4-7/16	—	1-23/32	1/2	—	KH209-28	LP210T	6.32
1-7/8	—		KHLP210-30														—	KH210-30		
1-15/16	—	—	KHLP210-31	160.10	2-7/16	9-1/4	6-5/8	7-5/8	2-1/2	3/4	1-1/8	1	4-15/16	—	1-29/32	5/8	—	KH210-31	LP211T	8.62
2	—		KHLP211-32														—	KH211-32		
2-3/16	—	—	KHLP211-35														—	KH211-35		
Dimensions (mm)																				
12	BLP201	42.60	KHLP201	43.20	27	121	83	95	29	12	16	13	56	22	28.6	M10	B1	KH201	LP203T	0.90
15	BLP202		KHLP202														B2	KH202		0.89
17	BLP203		KHLP203														B3	KH203		0.88
20	BLP204	42.60	KHLP204	43.20	31.8	133	89	108	32	12	19	13	65	24.7	31	M10	B4	KH204	LP204T	1.48
25	BLP205	45.20	KHLP205	47.10	33.3	140	95	114	38	12	19	16	68	27	31	M10	B5	KH205	LP205T	1.74
30	BLP206	63.20	KHLP206	66.45	39.7	165	114	133	41	15	22	17	81	30.3	35.7	M12	B6	KH206	LP206T	2.64
35	BLP207	72.60	KHLP207	80.00	46	178	127	146	48	15	22	19	94	32.9	38.9	M12	B7	KH207	LP207T	4.21
40	BLP208	101.35	KHLP208	91.20	49.2	184	133	152	51	15	22	21	100	35.5	43.7		B8	KH208	LP208T	4.85
45	—	—	KHLP209	103.65	52.4	197	140	165	54	15	25	21	106	—	43.7		—	KH209	LP209T	5.24
50	—	—	KHLP210	119.40	55.6	213	152	178	57	15	25	22	113	—	43.7	M12	—	KH210	LP210T	6.32
55	—		KHLP211														—	KH211	LP211T	8.62

Lubrication fitting tap size for 1" and smaller shaft sizes, 1/4-28 UNF; for all other sizes, 1/8-27 NPT

INTERCHANGES: VPLE-1 P2B-SXVB VAK PL3W-U SYH-FM AELPL VPL

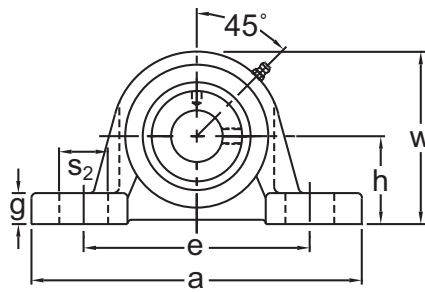


**Eccentric Locking
Wide Inner Ring
Cast Iron Housing
Low Shaft Height
Insert Detail-pg.124
Inch and Metric**

Shaft Diam. (in.)	AMI Unit #	List Price	Dimensions (in.)										Bolt Size (in.)	Bearing #	Housing #	Weight (lb.)	
			h	a	e		b	s ₁	s ₂	g	w	L					
					Min.	Max.											
1/2 5/8	UGAK201-8 UGAK202-10	54.80	1-1/16	4-3/4	3-1/4	3-3/4	1-3/8	1/2	5/8	1/2	2-1/8	1-15/32	3/8	UGW201-8 UGW202-10	AK203T	1.21	
3/4	UGAK204-12	54.80	1-1/4	5-1/4	3-5/8	4-1/8	1-5/8	1/2	5/8	9/16	2-1/2	1-23/32	3/8	UG204-12	AK204T	1.98	
7/8	UGAK205-14	62.60	1-5/16	5-1/2	3-7/8	4-3/8	1-3/4	1/2	5/8	5/8	2-11/16	1-3/4	3/8	UG205-14 UG205-15 UG205-16	AK205T	2.42	
15/16 1	UGAK205-15 UGAK205-16		77.90	1-9/16	6-5/16	4-1/2	5	1-7/8	19/32	3/4	11/16	3-5/32	1-29/32	1/2	UG206-18 UG206-19 UG206-20	AK206T	3.09
1-1/8	UGAK206-18			95.20	1-13/16	6-9/16	4-3/4	5-1/4	1-7/8	19/32	3/4	3/4	3-5/8	2-1/64	1/2	UG207-20 UG207-22 UG207-23	AK207T
1-3/16 1-1/4	UGAK206-19 UGAK206-20	107.90			1-15/16	7-1/8	5-1/4	5-3/4	2-1/8	19/32	3/4	3/4	3-15/16	2-7/32	1/2	UG208-24	AK208T
1-1/4 1-3/8 1-7/16	UGAK207-20 UGAK207-22 UGAK207-23		116.80		2-1/16	7-1/2	5-1/2	6	2-1/8	19/32	3/4	13/16	4-3/16	2-7/32	1/2	UG209-26 UG209-27 UG209-28	AK209T
1-1/2	UGAK208-24			150.60	2-3/16	8	6	6-1/2	2-1/4	19/32	3/4	7/8	4-7/16	2-15/32	1/2	UG210-30 UG210-31 UG210-32	AK210T
1-5/8 1-11/16 1-3/4	UGAK209-26 UGAK209-27 UGAK209-28	197.00			2-7/16	9-1/8	6-13/16	7-7/16	2-3/8	25/32	15/16	1	4-29/32	2-13/16	5/8	UG211-32 UG211-34 UG211-35	AK211T
1-7/8 1-15/16 2	UGAK210-30 UGAK210-31 UGAK210-32		244.20		2-11/16	9-1/2	7-3/16	7-13/16	2-1/2	25/32	15/16	1-1/8	5-3/8	3-1/16	5/8	UG212-36 UG212-38 UG212-39	AK212T
2 2-1/8 2-3/16	UGAK211-32 UGAK211-34 UGAK211-35																
2-1/4 2-3/8 2-7/16	UGAK212-36 UGAK212-38 UGAK212-39																
Dimensions (mm)																	
20	UGAK204	54.80	31.8	133	92	105	41	12	16	14.3	64	43.7	M10	UG204	AK204T	1.98	
25	UGAK205	62.60	33.3	140	98	111	45	12	16	16	68	44.4	M10	UG205	AK205T	2.42	
30	UGAK206	77.90	39.7	160	114	127	48	15	19	17	80	48.4	M12	UG206	AK206T	3.09	
35	UGAK207	95.20	46	167	121	133	48	15	19	19	92	51.1	M12	UG207	AK207T	4.19	
40	UGAK208	107.90	49.2	181	133	146	54	15	19	19	100	56.3		UG208	AK208T	4.85	
45	UGAK209	116.80	52.4	190	140	152	54	15	19	21	106	56.3		UG209	AK209T	5.73	
50	UGAK210	150.60	55.6	203	152	165	57	15	19	22	113	62.7	M12	UG210	AK210T	6.83	
55	UGAK211	197.00	61.9	232	173	189	60	20	24	25	125	71.4	M16	UG211	AK211T	9.26	
60	UGAK212	244.20	68.3	241	183	198	64	20	24	29	138	77.8	M16	UG212	AK212T	11.68	

Lubrication fitting tap size for 1" and smaller shaft sizes, 1/4-28 UNF; for all other sizes, 1/8-27 NPT

INTERCHANGES: VPLE-2 P2B-SXRB RAK PL3Y-L SYH-WF UELPL RPL




EXPANSION PILLOW BLOCKS

UCEP 200

NORMAL DUTY




Set-Screw Locking
Wide Inner Ring
Cast Iron Housing
Expansion Type
Insert Detail-pg.121-122
Inch and Metric

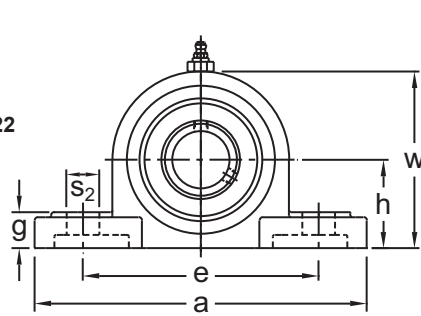

Shaft Diam. (in.)	AMI Unit #	List Price	Dimensions (in.)										Bolt Size (in.)	Bearing #	Housing #	Weight (lb.)
			h	a	e		b	s1	s2	g	w	Bi				
					Min.	Max.										
7/8 15/16 1	UCEP205-14 UCEP205-15 UCEP205-16	124.15	1-3/4	6-1/4	4-13/32	4-31/32	2	21/32	25/32	23/32	3-11/32	1.339	1/2	UC205-14 UC205-15 UC205-16	EP205	3.30
1-1/16 1-1/8 1-3/16 1-1/4	UCEP206-17 UCEP206-18 UCEP206-19 UCEP206-20	153.15	1-7/8	6-7/8	4-23/32	5-9/32	2-1/4	21/32	25/32	25/32	3-11/16	1.500	1/2	UC206-17 UC206-18 UC206-19 UC206-20	EP206	4.40
1-1/4 1-5/16 1-3/8 1-7/16	UCEP207-20 UCEP207-21 UCEP207-22 UCEP207-23	184.55	2-1/8	8	5-13/32	5-31/32	2-1/4	21/32	25/32	7/8	4-1/4	1.689	1/2	UC207-20 UC207-21 UC207-22 UC207-23	EP207	5.94
1-1/2	UCEP208-24	221.75	2-5/16	8-3/4	5-13/16	6-7/16	2-5/8	25/32	15/16	1-1/32	4-9/16	1.937	5/8	UC208-24	EP208	7.70
1-5/8 1-11/16 1-3/4	UCEP209-26 UCEP209-27 UCEP209-28	237.50	2-5/16	8-3/4	5-13/16	6-7/16	2-5/8	25/32	15/16	1-1/32	4-9/16	1.937	5/8	UC209-26 UC209-27 UC209-28	EP209	7.48
1-7/8 1-15/16 2	UCEP210-30 UCEP210-31 UCEP210-32	278.50	2-1/2	9-1/2	6-11/32	7-5/32	2-7/8	25/32	1-1/32	1-1/16	4-31/32	2.031	5/8	UC210-30 UC210-31 UC210-32	EP210	9.02
2 2-1/8 2-3/16	UCEP211-32 UCEP211-34 UCEP211-35	356.25	2-3/4	10-1/4	6-29/32	7-19/32	3-1/8	1	1-3/32	1-3/16	5-15/32	2.189	3/4	UC211-32 UC211-34 UC211-35	EP211	12.32
2-1/4 2-3/8 2-7/16	UCEP212-36 UCEP212-38 UCEP212-39	441.60	3	11-1/4	7-9/16	8-7/16	3-1/4	1	1-3/16	1-1/4	5-15/16	2.563	3/4	UC212-36 UC212-38 UC212-39	EP212	15.62
2-1/2	UCEP213-40	560.70	3	11-1/4	7-9/16	8-7/16	3-1/4	1	1-3/16	1-1/4	6-1/16	2.563	3/4	UC213-40	EP213	15.40
2-11/16 2-3/4	UCEP214-43 UCEP214-44	755.00	3-1/2	13	8-21/32	9-11/32	3-1/2	1-1/16	1-7/32	1-3/8	6-31/32	2.937	7/8	UC214-43 UC214-44	EP214	23.76
2-15/16 3	UCEP215-47 UCEP215-48	841.20	3-1/2	13	8-21/32	9-11/32	3-1/2	1-1/16	1-7/32	1-3/8	6-31/32	3.063	7/8	UC215-47 UC215-48	EP215	23.98
3-1/4 3-7/16	UCEP217-52 UCEP217-55	1236.00	4	15	10-7/16	11-13/16	4	1-1/16	1-9/16	1-21/32	8-1/16	3.374	7/8	UC217-52 UC217-55	EP217	36.08
Dimensions (mm)																
25 30	UCEP205 UCEP206	124.15 153.15	44.4 47.6	159 175	112 120	126 134	51 57	17 17	20 20	18 20	85 94	34 38.1	M14	UC205 UC206	EP205 EP206	3.30 4.40
35 40 45	UCEP207 UCEP208 UCEP209	184.55 221.75 237.50	54 58.7 58.7	203 222 222	137 148 148	152 164 164	57 67 67	17 20 20	20 24 24	22 26 26	108 116 116	42.9 49.2 49.2	M14 M16 M16	UC207 UC208 UC209	EP207 EP208 EP209	5.94 7.70 7.48
50 55 60	UCEP210 UCEP211 UCEP212	278.50 356.25 441.60	63.5 69.8 76.2	241 260 286	161 175 192	182 193 214	73 79 83	20 25 25	26 28 30	27 30 32	126 139 151	51.6 55.6 65.1	M16 M20 M20	UC210 UC211 UC212	EP210 EP211 EP212	9.02 12.32 15.62
65 70 75	UCEP213 UCEP214 UCEP215	560.70 755.00 841.20	76.2 88.9 88.9	286 330 330	192 220 220	214 237 237	83 89 89	25 27 27	30 31 31	32 35 35	154 177 177	65.1 74.6 77.8	M20 M22 M22	UC213 UC214 UC215	EP213 EP214 EP215	15.40 23.76 23.98
80 85	UCEP216 UCEP217	1020.00 1236.00	101.6 101.6	381 381	265 265	300 300	102 102	27 27	40 40	42 42	205 205	82.6 85.7	M22	UC216 UC217	EP216 EP217	37.62 36.08

Lubrication fitting Tap Size for 2-1/2" and smaller shaft sizes, 1/4-28 UNF, for all other sizes, 1/8-27 NPT.

INTERCHANGES: P2B-SCH-E RAKHL EMP

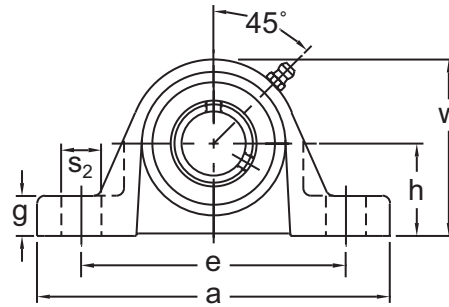


**Set-Screw Locking
Wide Inner Ring
Cast Iron Housing
Insert detail-pg.121-122
Inch and Metric**




Shaft Diam. (in.)	AMI Unit #	List Price	Dimensions (in.)										Bolt Size (in.)	Bearing #	Housing #	Weight (lb.)
			h	a	e		b	s ₁	s ₂	g	w	Bi				
					Min.	Max.										
7/8 15/16 1	UCSP205-14 UCSP205-15 UCSP205-16	86.60	1-3/4	7	5-1/8	5-5/8	2	9/16	3/4	9/16	3-5/16	1.339	1/2	UC205-14 UC205-15 UC205-16	SP205	4.00
1-1/16 1-1/8 1-3/16 1-1/4	UCSP206-17 UCSP206-18 UCSP206-19 UCSP206-20	145.45	2	7-1/2	5-3/8	6-1/8	2	9/16	7/8	5/8	3-7/8	1.500	1/2	UC206-17 UC206-18 UC206-19 UC206-20	SP206	5.80
1-1/4 1-5/16 1-3/8 1-7/16	UCSP207-20 UCSP207-21 UCSP207-22 UCSP207-23	198.35	2-3/8	8-1/4	5-5/8	6-7/8	2-1/4	3/4	1-1/4	3/4	4-1/2	1.689	5/8	UC207-20 UC207-21 UC207-22 UC207-23	SP207	7.40
1-1/2 1-9/16	UCSP208-24 UCSP208-25	235.50	2-5/16	8-1/2	5-7/8	7-1/8	2-3/8	3/4	1-1/4	3/4	4-9/16	1.937	5/8	UC208-24 UC208-25	SP208	7.60
1-5/8 1-11/16 1-3/4	UCSP209-26 UCSP209-27 UCSP209-28	287.70	2-3/8	8-3/4	5-7/8	7-1/8	2-3/8	3/4	1-1/4	3/4	4-5/8	1.937	5/8	UC209-26 UC209-27 UC209-28	SP209	8.00
1-7/8 1-15/16 2	UCSP210-30 UCSP210-31 UCSP210-32	310.45	2-3/4	10-1/2	6-3/4	8-1/2	2-1/2	3/4	1-1/2	7/8	5-5/16	2.031	5/8	UC210-30 UC210-31 UC210-32	SP210	11.60
2 2-1/8 2-3/16	UCSP211-32 UCSP211-34 UCSP211-35	380.00	3-1/8	11-1/4	7-5/8	9-3/8	2-3/4	3/4	1-1/2	7/8	5-15/16	2.189	5/8	UC211-32 UC211-34 UC211-35	SP211	14.60
2-1/4 2-3/8 2-7/16	UCSP212-36 UCSP212-38 UCSP212-39	401.25	3-1/8	11-1/2	7-7/8	9-3/8	3	7/8	1-1/2	7/8	6-1/16	2.563	3/4	UC212-36 UC212-38 UC212-39	SP212	16.00
2-1/2	UCSP213-40	442.25	3-3/4	12-5/8	9-3/8	10-5/8	3-3/8	7/8	1-3/8	1	7-1/8	2.563	3/4	UC213-40	SP213	20.40
2-11/16 2-3/4	UCSP214-43 UCSP214-44	688.70	3-3/4	12-5/8	9-3/8	10-5/8	3-3/8	7/8	1-3/8	1	7-1/8	2.937	3/4	UC214-43 UC214-44	SP214	20.90
2-15/16 3	UCSP215-47 UCSP216-48	720.60	3-3/4 4	13 14-1/2	9-1/4 10-5/8	10-3/4 12-1/8	3-3/8 3-3/4	7/8 7/8	1-1/2 1-1/2	1 1-1/8	7-3/16 7-13/16	3.063 3.252	3/4	UC215-47 UCX15-48	SP215 SP216	23.80 30.00
3-1/4 3-7/16	UCSP217-52 UCSP217-55	1192.65	4	15	9-5/8	11-7/8	4-1/4	1	2	1-1/4	8-1/16	3.374	7/8	UC217-52 UC217-55	SP217	37.40
Dimensions (mm)																
25 30	UCSP205 UCSP206	86.60 145.45	44.5 50.8	177.8 190.5	130.2 136.5	142.9 155.6	50.8 50.8	14.3 14.3	19.0 22.2	14.3 15.9	84.1 98.4	34 38.1	M12	UC205 UC206	SP205 SP206	4.00 5.80
35 40 45	UCSP207 UCSP208 UCSP209	198.35 235.50 287.70	60.3 58.7 60.3	209.5 215.9 222.2	142.9 149.2 149.2	174.6 181.0 181.0	57.1 60.3 60.3	19.0 19.0 19.0	31.7 31.7 31.7	19.0 19.0 19.0	114.3 115.9 117.5	42.9 49.2 49.2	M16	UC207 UC208 UC209	SP207 SP208 SP209	7.40 7.40 7.80
50 55 60	UCSP210 UCSP211 UCSP212	310.45 380.00 401.25	69.8 79.4 79.4	266.7 285.7 292.1	171.5 193.7 200.0	215.9 238.1 238.1	63.5 69.8 76.2	19.0 19.0 22.2	38.1 38.1 38.1	22.2 22.2 22.2	134.9 150.8 154.0	51.6 55.6 65.1	M16 M16 M20	UC210 UC211 UC212	SP210 SP211 SP212	11.60 14.20 15.80
65 70 75	UCSP213 UCSP214 UCSP215	442.25 688.70 720.60	95.2 95.2 95.2	320.7 320.7 330.2	238.1 238.1 235.0	269.9 269.9 273.0	85.7 85.7 85.7	22.2 22.2 22.2	34.9 34.9 38.1	25.4 25.4 25.4	181.0 181.0 182.6	65.1 74.6 77.8	M20	UC213 UC214 UC215	SP213 SP214 SP215	20.40 20.70 23.80
80 85	UCSP216 UCSP217	1058.55 1192.65	101.6 101.6	368.3 381.0	269.9 244.5	308.0 301.6	95.3 108.0	22.2 25.4	38.1 50.8	28.6 31.8	198.4 204.8	82.6 85.7	M20 M22	UC216 UC217	SP216 SP217	30.00 36.80

Lubrication fitting tap size for 1" and smaller shaft sizes, 1/4-28 UNF; for all other sizes, 1/8-27 NPT

INTERCHANGES: SP



Set-Screw/Eccentric Locking
Narrow Inner Ring
Cast Iron Housing
Non-Relube
Insert Detail-pg.125,126
Inch and Metric

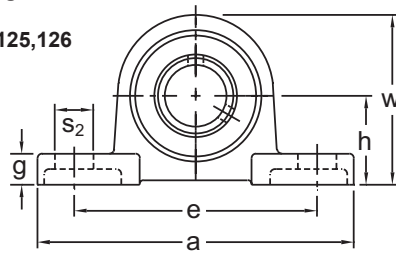

BLLP 200 Type
Set-Screw Locking




KHLLP 200 Type
Eccentric Collar Locking

Shaft Diam. (in.)	AMI Unit # Complete with B 200 Type	List Price	AMI Unit # Complete with KH 200 Type	List Price	Dimensions (in.)												Bolt Size (in.)	Bearing #		Housing #	Weight (lb.)
					h	a	e		b	s ₁	s ₂	g	w	Bi	L	B		KH			
							Min.	Max.													
1/2	BLLP1-8	37.45	KHLLP201-8	38.85	1-3/16	4-1/2	3-3/16	3-11/16	1	7/16	5/8	15/32	2-1/4	0.866	1-1/8	3/8	B1-8	KH201-8	LLP3	0.90	
5/8	BLLP2-10		KHLLP202-10	38.85	1-3/16	4-1/2	3-3/16	3-11/16	1	7/16	5/8	15/32	2-1/4	0.866	1-1/8	3/8	B2-10	KH202-10	LLP3	0.88	
3/4	BLLP4-12	37.95	KHLLP204-12	40.55	1-5/16	4-15/16	3-9/16	4-1/16	1-1/16	7/16	5/8	1/2	2-1/2	0.972	1-7/32	3/8	B4-12	KH204-12	LLP4	1.15	
7/8	BLLP5-14	41.20	KHLLP205-14	43.10	1-7/16	5-1/8	3-11/16	4-3/16	1-1/8	7/16	5/8	1/2	2-3/4	1.063	1-7/32	3/8	B5-14	KH205-14	LLP5	1.39	
15/16	BLLP5-15		KHLLP205-15	43.10	1-7/16	5-1/8	3-11/16	4-3/16	1-1/8	7/16	5/8	1/2	2-3/4	1.063	1-7/32	3/8	B5-15	KH205-15	LLP5	1.39	
1	BLLP5-16	56.25	KHLLP205-16	43.10	1-7/16	5-1/8	3-11/16	4-3/16	1-1/8	7/16	5/8	1/2	2-3/4	1.063	1-7/32	3/8	B5-16	KH205-16	LLP5	1.39	
1-1/16	BLLP6-17		—	—	—	—	—	—	—	—	—	—	—	—	—	—	B6-17	—	—	—	
1-1/8	BLLP6-18		KHLLP206-18	59.50	1-11/16	6-1/8	4-13/32	5-1/32	1-3/16	9/16	13/16	19/32	3-1/4	1.193	1-13/32	1/2	B6-18	KH206-18	LLP6	1.67	
1-3/16	BLLP6-19		KHLLP206-19	59.50	1-11/16	6-1/8	4-13/32	5-1/32	1-3/16	9/16	13/16	19/32	3-1/4	1.193	1-13/32	1/2	B6-19	KH206-19	LLP6	1.67	
1-1/4	BLLP6-20	70.85	KHLLP206-20	59.50	1-11/16	6-1/8	4-13/32	5-1/32	1-3/16	9/16	13/16	19/32	3-1/4	1.193	1-13/32	1/2	B6-20	KH206-20	LLP6	1.67	
1-1/4	BLLP7-20		KHLLP207-20	78.25	1-7/8	6-1/2	4-11/16	5-5/16	1-3/8	9/16	13/16	5/8	3-5/8	1.295	1-17/32	1/2	B7-20	KH207-20	LLP7	2.40	
1-5/16	BLLP7-21		KHLLP207-21	78.25	1-7/8	6-1/2	4-11/16	5-5/16	1-3/8	9/16	13/16	5/8	3-5/8	1.295	1-17/32	1/2	B7-21	KH207-21	LLP7	2.40	
1-3/8	BLLP7-22		KHLLP207-22	78.25	1-7/8	6-1/2	4-11/16	5-5/16	1-3/8	9/16	13/16	5/8	3-5/8	1.295	1-17/32	1/2	B7-22	KH207-22	LLP7	2.40	
1-7/16	BLLP7-23		KHLLP207-23	78.25	1-7/8	6-1/2	4-11/16	5-5/16	1-3/8	9/16	13/16	5/8	3-5/8	1.295	1-17/32	1/2	B7-23	KH207-23	LLP7	2.40	
Dimensions (mm)																					
12	BLLP1	37.45	KHLLP201	38.85	30.2	114	81	94	25	12	16	12	57	22	28.6	M10	B1	KH201	LLP3	0.90	
15	BLLP2		KHLLP202	38.85	30.2	114	81	94	25	12	16	12	57	22	28.6	M10	B2	KH202	LLP3	0.88	
17	BLLP3		KHLLP203	38.85	30.2	114	81	94	25	12	16	12	57	22	28.6	M10	B3	KH203	LLP3	0.86	
20	BLLP4	37.95	KHLLP204	40.55	33.3	125	91	103	27	12	16	13	64	24.7	31	M10	B4	KH204	LLP4	1.15	
25	BLLP5	41.20	KHLLP205	43.10	36.5	130	94	106	29	12	16	13	70	27	31	M10	B5	KH205	LLP5	1.39	
30	BLLP6	56.25	KHLLP206	59.50	42.9	156	112	128	33	14	21	15	83	30.3	35.7	M12	B6	KH206	LLP6	1.67	
35	BLLP7	70.85	KHLLP207	78.25	47.6	165	119	135	35	14	21	16	93	32.9	38.9	M12	B7	KH207	LLP7	2.40	

INTERCHANGES: ASPB PB100 AELPB



Set-Screw/Eccentric Locking
Narrow Inner Ring
Ductile Iron Housing
Insert Detail-pg.125,126
Inch and Metric

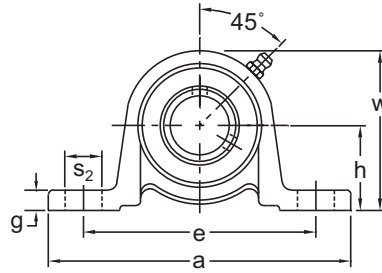

BPW 200 Type Set-Screw Locking KHPW 200 Type Eccentric Collar Locking



Shaft Diam. (in.)	AMI Unit # Complete with B 200 Type	List Price	AMI Unit # Complete with KH 200 Type	List Price	Dimensions (in.)												Bolt Size (in.)	Bearing #		Housing #	Weight (lb.)
					h	a	e		b	s ₁	s ₂	g	w	Bi	L	B		KH			
							Min.	Max.													
1/2	BPW201-8	53.75	KHPW201-8	55.15	1-3/16	4-1/2	3-3/16	3-11/16	1	7/16	5/8	9/32	2-11/64	0.866	1-1/8	3/8	B1-8	KH201-8	PW203	0.68	
5/8	BPW202-10		KHPW202-10		1-5/16	4-15/16	3-9/16	4-1/16	1-1/16	7/16	5/8	5/16	2-7/16	0.972	1-7/32	3/8	B2-10	KH202-10		0.66	
3/4	BPW204-12	58.60	KHPW204-12	55.65	1-5/16	4-15/16	3-9/16	4-1/16	1-1/16	7/16	5/8	5/16	2-7/16	0.972	1-7/32	3/8	B4-12	KH204-12	PW204	0.82	
7/8	BPW205-14	59.50	KHPW205-14	61.40	1-7/16	5-1/8	3-11/16	4-3/16	1-1/8	7/16	5/8	11/32	2-45/64	1.063	1-7/32	3/8	B5-14	KH205-14	PW205	1.06	
15/16	BPW205-15		KHPW205-15														B5-15	KH205-15			
1	BPW205-16		KHPW205-16														B5-16	KH205-16			
1-1/16	BPW206-17	73.45	—	76.70													B6-17	—	PW206	1.79	
1-1/8	BPW206-18		KHPW206-18		1-11/16	6-5/32	4-13/32	5-1/32	1-5/16	9/16	13/16	3/8	3-3/16	1.193	1-13/32	1/2	B6-18	KH206-18			
1-3/16	BPW206-19		KHPW206-19														B6-19	KH206-19			
1-1/4	BPW206-20		KHPW206-20														B6-20	KH206-20			
1-1/4	BPW207-20	80.35	KHPW207-20	87.75													B7-20	KH207-20	PW207	2.42	
1-5/16	BPW207-21		KHPW207-21		1-7/8	6-1/2	4-11/16	5-5/16	1-3/8	9/16	13/16	13/32	3-37/64	1.295	1-17/32	1/2	B7-21	KH207-21			
1-3/8	BPW207-22		KHPW207-22														B7-22	KH207-22			
1-7/16	BPW207-23		KHPW207-23														B7-23	KH207-23			
Dimensions (mm)																					
12	BPW201	53.75	KHPW201	55.15	30.2	114	81	94	25	11	16	7	55	22	28.6	M10	B1	KH201	PW203	0.68	
15	BPW202		KHPW202															B2		KH202	0.67
17	BPW203		KHPW203															B3		KH203	0.65
20	BPW204	58.60	KHPW204	55.65	33.3	125	91	103	27	11	16	8	62	24.7	31	M10	B4	KH204	PW204	0.83	
25	BPW205	59.50	KHPW205	61.40	36.5	130	94	106	29	11	16	9	69	27	31	M10	B5	KH205	PW205	1.07	
30	BPW206	73.45	KHPW206	76.70	42.9	156	112	128	33	14	21	10	81	30.3	35.7	M12	B6	KH206	PW206	1.81	
35	BPW207	80.35	KHPW207	87.75	47.6	165	119	135	35	14	21	10	91	32.9	38.9	M12	B7	KH207	PW207	2.45	

Lubrication fitting tap size for 1" and smaller shaft sizes, 1/4-28 UNF; for all other sizes, 1/8-27 NPT


INTERCHANGES:	VPS-1-M	LP	PB100	VPE-1-M	LP-E
---------------	---------	----	-------	---------	------



Set-Screw/Eccentric Locking
Narrow Inner Ring
Pressed Steel Housing
Rubber Cushioned
Non-Relube
Insert Detail-pg.125,126
Inch and Metric

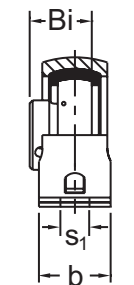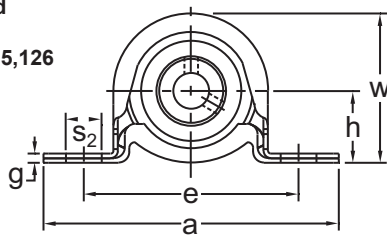

BPR 200 Type
Set-Screw Locking







KHPR 200 Type
Eccentric Collar Locking



Shaft Diam. (in.)	AMI Unit # Complete with B 200 Type	List Price	AMI Unit # Complete with KH 200 Type	List Price	Dimensions (in.)												Stamping Load Limit (lbs.)	Bolt Size (in.)	Bearing #		Housing #	Rubber Ring #	Weight (lb.)
					h	a	e		b	s ₁	s ₂	g	w	Bi	L	B			KH				
							Min.	Max.															
1/2	BPR1-8	34.70	KHPR201-8	36.10	1	4-1/8	2-7/8	3-1/8	1	13/32	1/2	1/8	2-1/16	0.866	1-1/8	350	3/8	B1-8	KH201-8	PP4	R4	0.46	
5/8	BPR2-10		KHPR202-10															B2-10	KH202-10			0.44	
3/4	BPR4-12	39.00	KHPR204-12	37.60	1-1/8	4-1/2	3-3/16	3-9/16	1-1/8	13/32	9/16	5/32	2-7/32	0.972	1-7/32	400	3/8	B4-12	KH204-12	PP5	R5	0.53	
7/8	BPR5-14	41.80	KHPR205-14	41.80	1-5/16	4-7/8	3-9/16	3-15/16	1-1/4	13/32	9/16	5/32	2-5/8	1.063	1-7/32	600	3/8	B5-14	KH205-14	PP6	R6	0.77	
15/16	BPR5-15		KHPR205-15															B5-15	KH205-15				
1	BPR5-16		KHPR205-16															B5-16	KH205-16				
1-1/16	BPR6-17	51.85	—	56.70	1-9/16	5-3/4	4	4-1/2	1-5/16	17/32	3/4	3/16	3-1/8	1.193	1-13/32	800	1/2	B6-17	—	PP7	R7	1.17	
1-1/8	BPR6-18		KHPR206-18															B6-18	KH206-18				
1-3/16	BPR6-19		KHPR206-19																B6-19				KH206-19
1-1/4	BPR6-20		KHPR206-20																B6-20				KH206-20
Dimensions (mm)																							
12	BPR1	37.80	KHPR201	36.10	25.4	104.8	73	79	25.4	10.3	12.7	3.2	52.4	22	28.6	350	M10	B1	KH201	PP4	R4	0.47	
15	BPR2		KHPR202																B2			KH202	0.45
17	BPR3		KHPR203																			B3	KH203
20	BPR4	39.00	KHPR204	39.60	28.6	114.3	81	91	28.6	10.3	14.3	4	56.4	24.7	31	400	M10	B4	KH204	PP5	R5	0.54	
25	BPR5	41.80	KHPR205	41.80	33.3	123.8	91	100	31.8	10.3	14.3	4	66.7	27	31	600	M10	B5	KH205	PP6	R6	0.78	
30	BPR6	51.85	KHPR206	56.70	39.7	146.1	102	114	33.3	13.5	19.1	4.6	79.4	30.3	35.7	800	M12	B6	KH206	PP7	R7	1.18	

INTERCHANGES: SSRPS ASRPP SSRPE RPB SR-FM AELRPP LRP

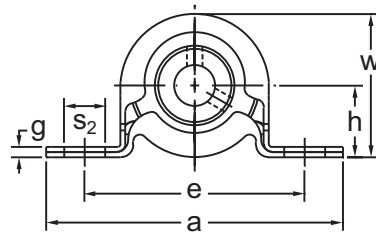BPP 200 Type
Set-Screw LockingKHPP 200 Type
Eccentric Collar Locking

Set-Screw/Eccentric Locking
Narrow Inner Ring
Pressed Steel Housing
Non-Relube
Insert Detail-pg.125,126
Inch and Metric

Shaft Diam. (in.)	AMI Unit # Complete with B 200 Type	List Price	AMI Unit # Complete with KH 200 Type	List Price	Dimensions (in.)												Stamping Load Limit (lbs.)	Bolt Size (in.)	Bearing #		Housing #	Weight (lb.)
					h	a	e		b	s1	s2	g	w	Bi	L	B			KH			
							Min.	Max.														
1/2	BPP1-8	36.75	KHPP201-8	38.15	7/8	3-5/8	2-1/2	2-7/8	1	11/32	1/2	1/8	1-3/4	0.866	1-1/8	300	5/16	B1-8	KH201-8	PP3	0.39	
5/8	BPP2-10		KHPP202-10																B2-10		KH202-10	0.37
3/4	BPP4-12		KHPP204-12		1	4-1/8	2-7/8	3-1/8	1	13/32	1/2	1/8	2-1/16	0.972	1-7/32	350	3/8	B4-12	KH204-12		PP4	0.55
7/8	BPP5-14	38.00	KHPP205-14	39.90	1-1/8	4-1/2	3-3/16	3-9/16	1-1/8	13/32	9/16	5/32	2-7/32	1.063	1-7/32	400	3/8	B5-14	KH205-14	PP5	0.73	
15/16	BPP5-15		KHPP205-15																B5-15		KH205-15	
1	BPP5-16		KHPP205-16																B5-16		KH205-16	
1-1/16	BPP6-17	49.00	—	52.25	1-5/16	4-7/8	3-9/16	3-15/16	1-1/4	13/32	9/16	5/32	2-5/8	1.193	1-13/32	600	3/8	B6-17	—	PP6	1.06	
1-1/8	BPP6-18		KHPP206-18																B6-18		KH206-18	
1-3/16	BPP6-19		KHPP206-19																B6-19		KH206-19	
1-1/4	BPP6-20	61.45	KHPP206-20	68.85														B6-20	KH206-20	PP7		
1-1/4	BPP7-20		KHPP207-20																B7-20		KH207-20	
1-5/16	BPP7-21		KHPP207-21																B7-21		KH207-21	
1-3/8	BPP7-22	61.45	KHPP207-22	68.85	1-9/16	5-3/4	4	4-1/2	1-5/16	17/32	3/4	3/16	3-1/8	1.295	1-17/32	800	1/2	B7-22	KH207-22		1.58	
1-7/16	BPP7-23		KHPP207-23																B7-23	KH207-23		
Dimensions (mm)																						
12	BPP1	36.75	KHPP201	38.15	22.2	92.1	64	73	25.4	8.7	12.7	3.2	44.5	22	28.6	300	M8	B1	KH201	PP3	0.39	
15	BPP2		KHPP202																B2		KH202	0.37
17	BPP3		KHPP203																B3		KH203	0.35
20	BPP4	37.25	KHPP204	38.65	25.4	104.8	73	79	25.4	10.3	12.7	3.2	52.4	24.7	31	350	M10	B4	KH204	PP4	0.55	
25	BPP5	38.00	KHPP205	39.90	28.6	114.3	81	91	28.6	10.3	14.3	4	56.4	27	31	400		B5	KH205	PP5	0.73	
30	BPP6	49.00	KHPP206	52.25	33.3	123.8	91	100	31.8	10.3	14.3	4	66.7	30.3	35.7	600		B6	KH206	PP6	1.06	
35	BPP7	61.45	KHPP207	68.85	39.7	146.1	102	114	33.3	13.5	19.1	4.6	79.4	32.9	38.9	800		M12	B7	KH207	PP7	1.58

INTERCHANGES:	SSPS	P2B-SL	PS25	ASPP	SSP	SSPE	P2B-SLX	PB	S-FM	AELPP	SSP-E
---------------	------	--------	------	------	-----	------	---------	----	------	-------	-------





TAPPED BASE PILLOW BLOCKS

UCTB / UCPA 200

NORMAL DUTY




**Set-Screw Locking
Wide Inner Ring
Cast Iron Housing
Insert Detail-pg.121,122
Inch and Metric**



Shaft Diam. (in.)	AMI Unit #	List Price	Dimensions (in.)							Bolt Hole UNC Thread t (in.)	Bearing #	Housing #	Weight (lb.)
			h	a	e	b	r	w	Bi				
1/2 5/8 3/4	UCTB201-8 UCTB202-10 UCTB204-12	48.40	1-5/16	2-7/8	2	1-1/2	1/2	2-9/16	1.220	3/8-16	UC201-8 UC202-10 UC204-12	TB204	1.43
7/8 15/16 1	UCTB205-14 UCTB205-15 UCTB205-16	52.90	1-7/16	3	2	1-1/2	1/2	2-13/16	1.339	3/8-16	UC205-14 UC205-15 UC205-16	TB205	1.79
1-1/16 1-1/8 1-3/16 1-1/4	UCTB206-17 UCTB206-18 UCTB206-19 UCTB206-20	66.20	1-11/16	4	3	1-1/2	5/8	3-3/8	1.500	7/16-14	UC206-17 UC206-18 UC206-19 UC206-20	TB206	2.65
1-1/4 1-5/16 1-3/8 1-7/16	UCTB207-20 UCTB207-21 UCTB207-22 UCTB207-23	82.00	1-7/8	4-1/4	3-1/4	1-7/8	3/4	3-3/4	1.689	1/2-13	UC207-20 UC207-21 UC207-22 UC207-23	TB207	3.75
1-1/2 1-9/16	UCTB208-24 UCTB208-25	100.90	1-15/16	4-5/8	3-1/2	1-7/8	3/4	3-15/16	1.937	1/2-13	UC208-24 UC208-25	TB208	4.19
1-5/8 1-11/16 1-3/4	UCTB209-26 UCTB209-27 UCTB209-28	109.65	2-1/8	5	3-3/4	2	3/4	4-1/4	1.937	1/2-13	UC209-26 UC209-27 UC209-28	TB209	4.85
1-7/8 1-15/16 2	UCTB210-30 UCTB210-31 UCTB210-32	130.90	2-1/4	5-1/2	4	2	7/8	4-5/8	2.031	5/8-11	UC210-30 UC210-31 UC210-32	TB210	5.73
2 2-1/8 2-3/16	UCTB211-32 UCTB211-34 UCTB211-35	202.70	2-1/4	5-1/2	4	2	7/8	4-5/8	2.189	5/8-11	UC211-32 UC211-34 UC211-35	TB211	6.4
Dimensions (mm)													
12 15 17	UCPA201 UCPA202 UCPA203	48.40	30.2	76	52	38	12	62	31	M10	UC201 UC202 UC203	PA204	1.45 1.40 1.38
20 25 30	UCPA204 UCPA205 UCPA206	48.40 52.90 66.20	30.2 36.5 42.9	76 84 94	52 56 66	38 38 48	12 15 18	62 72 84	31 34 38.1	M10 M10 M14	UC204 UC205 UC206	PA204 PA205 PA206	1.34 1.81 2.68
35 40 45	UCPA207 UCPA208 UCPA209	82.00 100.90 109.65	47.6 49.2 54.2	110 116 120	80 84 90	48 54 54	20 20 25	95 100 108	42.9 49.2 49.2	M14	UC207 UC208 UC209	PA207 PA208 PA209	3.79 4.24 4.91
50	UCPA210	130.90	57.2	130	94	60	25	116	51.6	M16	UC210	PA210	5.80

Lubrication fitting tap size for 1" and smaller shaft sizes, 1/4-28 UNF; for all other sizes, 1/8-27 NPT

INTERCHANGES: VTBS TB-SC STB PT3U-N TBC25 UCUP TB




BSHE 200 Type
Set-Screw LockingKHSHE 200 Type
Eccentric Collar Locking

Set-Screw/Eccentric Locking
Narrow Inner Ring
Cast Iron Housing
Insert Detail-pg.125-126
Inch and Metric

Shaft Diam. (in.)	AMI Unit # Complete with B 200 Type	List Price	AMI Unit # Complete with KH 200 Type	List Price	Dimensions (in.)								Bolt Hole Thread t (mm)	Bearing #		Housing #	Weight (lb.)
					h	a	e	b	r	w	Bi	L		B	KH		
3/4	BSHE204-12	91.85	KHSHE204-12	93.50	1.311	2.756	2.000	1.260	0.393	2.520	0.972	1-7/32	M8	B4-12	KH204-12	SHE04	0.80
7/8	BSHE205-14	106.95	KHSHE205-14	110.00	1.437	3.150	2.000	1.417	0.492	2.756	1.063	1-7/32	M10	B5-14	KH205-14	SHE05	1.20
15/16	BSHE205-15		KHSHE205-15											B5-15	KH205-15		
1	BSHE205-16		KHSHE205-16											B5-16	KH205-16		
1-1/16	BSHE206-17	126.50	—	131.30	1.689	3.858	3.000	1.575	0.492	3.228	1.193	1-13/32	M10	B6-17	—	SHE06	1.80
1-1/8	BSHE206-18		KHSHE206-18											B6-18	KH206-18		
1-3/16	BSHE206-19		KHSHE206-19											B6-19	KH206-19		
1-1/4	BSHE206-20		KHSHE206-20											B6-20	KH206-20		
1-1/4	BSHE207-20	167.20	KHSHE207-20	176.70	1.874	4.331	3.252	1.772	0.492	3.661	1.295	1-17/32	M10	B7-20	KH207-20	SHE07	3.00
1-5/16	BSHE207-21		KHSHE207-21											B7-21	KH207-21		
1-3/8	BSHE207-22		KHSHE207-22											B7-22	KH207-22		
1-7/16	BSHE207-23		KHSHE207-23											B7-23	KH207-23		
1-1/2	BSHE208-24	207.60	KHSHE208-24	199.90	1.937	4.567	3.500	1.890	0.591	3.898	1.398	1-23/32	M12	B8-24	KH208-24	SHE08	3.40
1-5/8	—	—	KHSHE209-26	220.80	2.126	4.724	3.752	1.890	0.591	4.213	—	1-23/32	M12	—	KH209-26	SHE09	4.00
1-11/16			KHSHE209-27												KH209-27		
1-3/4			KHSHE209-28												KH209-28		
1-7/8	—	—	KHSHE210-30	257.45	2.252	5.315	4.000	2.087	0.787	4.528	—	1-23/32	M16	—	KH210-30	SHE10	4.80
1-15/16			KHSHE210-31												KH210-31		
2	—	—	KHSHE211-32	290.70	2.520	5.906	4.646	2.362	0.787	4.921	—	1-29/32	M16	—	KH211-32	SHE11	6.50
2-1/8			KHSHE211-34												KH211-34		
2-3/16			KHSHE211-35												KH211-35		
Dimensions (mm)																	
20	BSHE204	91.85	KHSHE204	93.50	33.3	70	50.8	32	10.0	64	24.7	31.0	M8	B4	KH204	SHE04	0.80
25	BSHE205	106.95	KHSHE205	110.00	36.5	80	50.8	36	12.5	70	27.0	31.0	M10	B5	KH205	SHE05	1.20
30	BSHE206	126.50	KHSHE206	131.30	42.9	98	76.2	40	12.5	82	30.3	35.7	M10	B6	KH206	SHE06	1.80
35	BSHE207	167.20	KHSHE207	176.70	47.6	110	82.6	45	12.5	93	32.9	38.9	M10	B7	KH207	SHE07	2.80
40	BSHE208	207.60	KHSHE208	199.90	49.2	116	88.9	48	15.0	99	35.5	43.7	M12	B8	KH208	SHE08	3.40
45	—	—	KHSHE209	220.80	54.0	120	95.3	48	15.0	107	—	43.7	M12	—	KH209	SHE09	4.00
50	—	—	KHSHE210	257.45	57.2	135	101.6	53	20.0	115	—	43.7	M16	—	KH210	SHE10	4.60
55			KHSHE211	290.70	64.0	150	118.0	60	20.0	125		48.7			KH211	SHE11	6.50

Lubrication fitting tap size for 1" and smaller shaft sizes, 1/4-28 UNF; for all other sizes, 1/8-27 NPT

INTERCHANGES: PSHE PSHEY

UCSHE 200 Type
Set-Screw LockingUGSHE 200 Type
Eccentric Collar Locking

Set-Screw/Eccentric Locking
Wide Inner Ring
Cast Iron Housing
Insert Detail-pg.113,115
Metric

Shaft Diam. (mm)	AMI Unit # Complete with UC 200 Type	List Price	AMI Unit # Complete with UG 200 Type	List Price	Dimensions (mm)								Bolt Hole Thread t (mm)	Bearing #		Housing #	Weight (lb.)
					h	a	e	b	r	w	Bi	L		UC	UG		
20	UCSHE204	93.75	UGSHE204	98.50	33.3	70	50.8	32	10.0	64	31.0	43.7	M8	UC204	UG204	SHE04	1.00
25	UCSHE205	110.75	UGSHE205	121.30	36.5	80	50.8	36	12.5	70	34.0	44.4	M10	UC205	UG205	SHE05	1.40
30	UCSHE206	128.25	UGSHE206	140.40	42.9	98	76.2	40	12.5	82	38.1	48.4	M10	UC206	UG206	SHE06	2.00
35	UCSHE207	170.05	UGSHE207	187.60	47.6	110	82.6	45	12.5	93	42.9	51.1	M10	UC207	UG207	SHE07	3.20
40	UCSHE208	195.65	UGSHE208	213.60	49.2	116	88.9	48	15.0	99	49.2	56.3	M12	UC208	UG208	SHE08	3.80
45	UCSHE209	213.95	UGSHE209	233.50	54.0	120	95.3	48	15.0	107	49.2	56.3	M12	UC209	UG209	SHE09	4.40
50	UCSHE210	253.25	UGSHE210	265.85	57.2	135	101.6	53	20.0	115	51.6	62.7	M16	UC210	UG210	SHE10	5.40
55	UCSHE211	282.85	UGSHE211	305.70	64.0	150	118.0	60	20.0	125	55.6	71.4	M16	UC211	UG211	SHE11	7.20
60	UCSHE212	367.40	UGSHE212	318.95	69.9	150	118.0	61	20.0	140	65.1	77.8	M16	UC212	UG212	SHE12	9.80

Lubrication fitting tap size for 25mm and smaller shaft sizes, 1/4-28 UNF; for all other sizes, 1/8-27 NPT

INTERCHANGES: RSHE RSHEY




PEDESTAL BASE PILLOW BLOCKS

UCPH 200

NORMAL DUTY



Set-Screw Locking
Wide Inner Ring
Cast Iron Housing
Insert Detail-pg.121-122
Inch and Metric

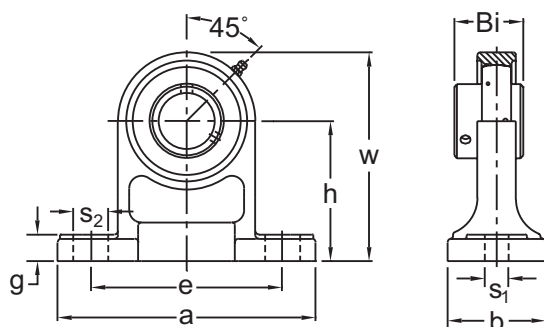

Shaft Diam. (in.)	AMI Unit #	List Price	Dimensions (in.)										Bolt Size (in.)	Bearing #	Housing #	Weight (lb.)
			h	a	e		b	s ₁	s ₂	g	w	Bi				
					Min.	Max.										
1/2	UCPH201-8	75.40	2-3/4	5	3-3/8	4-1/8	1-9/16	1/2	3/4	19/32	3-31/32	1.220	3/8	UC201-8	PH204	2.20
5/8	UCPH202-10													UC202-10		2.18
3/4	UCPH204-12													UC204-12		2.11
7/8	UCPH205-14	87.55	3-5/32	5-1/2	3-3/4	4-1/2	1-31/32	1/2	3/4	5/8	4-1/2	1.339	3/8	UC205-14	PH205	2.64
15/16	UCPH205-15													UC205-15		
1	UCPH205-16													UC205-16		
1-1/16	UCPH206-17	114.20	3-17/32	6-1/2	4-7/16	5-1/16	1-31/32	21/32	13/16	23/32	5-1/8	1.500	1/2	UC206-17	PH206	4.18
1-1/8	UCPH206-18													UC206-18		
1-3/16	UCPH206-19													UC206-19		
1-1/4	UCPH206-20													UC206-20		
1-1/4	UCPH207-20	134.05	3-3/4	6-9/16	4-11/16	5-5/16	2-3/8	21/32	13/16	3/4	5-1/2	1.689	1/2	UC207-20	PH207	5.29
1-5/16	UCPH207-21													UC207-21		
1-3/8	UCPH207-22													UC207-22		
1-7/16	UCPH207-23													UC207-23		
1-1/2	UCPH208-24	164.90	3-15/16	7-1/4	4-7/8	5-7/8	2-3/4	21/32	1	3/4	5-7/8	1.937	1/2	UC208-24	PH208	6.12
1-9/16	UCPH208-25													UC208-25		
1-5/8	UCPH209-26	188.00	4-1/8	7-1/2	5-1/4	6-1/4	2-3/4	21/32	1	25/32	6-3/16	1.937	1/2	UC209-26	PH209	7.05
1-11/16	UCPH209-27													UC209-27		
1-3/4	UCPH209-28													UC209-28		
1-7/8	UCPH210-30	213.30	4-11/32	8-1/8	5-7/8	6-5/8	2-3/4	25/32	1	7/8	6-1/2	2.031	5/8	UC210-30	PH210	7.93
1-15/16	UCPH210-31													UC210-31		
2	UCPH210-32													UC210-32		
Dimensions (mm)																
12	UCPH201	75.40	70	127	86	105	40	13	19	15	101	31	M10	UC201	PH204	2.23
15	UCPH202													UC202		2.21
17	UCPH203													UC203		2.19
20	UCPH204	75.40	70	127	86	105	40	13	19	15	101	31	M10	UC204	PH204	2.14
25	UCPH205	87.55	80	140	95	114	50	13	19	16	114	34	M10	UC205	PH205	2.68
30	UCPH206	114.20	90	165	113	129	50	17	21	18	130	38.1	M14	UC206	PH206	4.24
35	UCPH207	134.05	95	167	119	135	60	17	21	19	140	42.9	M14	UC207	PH207	5.35
40	UCPH208	164.90	100	184	124	149	70	17	25	19	149	49.2		UC208	PH208	6.24
45	UCPH209	188.00	105	190	133	159	70	17	25	20	157	49.2		UC209	PH209	7.14
50	UCPH210	213.30	110	206	149	168	70	20	25	22	165	51.6	M16	UC210	PH210	8.03

Lubrication fitting tap size for 1" and smaller shaft sizes, 1/4-28 UNF; for all other sizes, 1/8-27 NPT

INTERCHANGES: UCPH UCHP

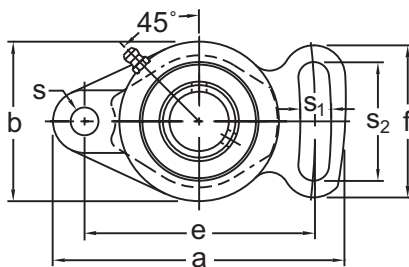

Set-Screw Locking
Wide Inner Ring
Cast Iron Housing
Insert Detail-pg.121-122
Inch and Metric

Shaft Diam. (in.)	AMI Unit #	List Price	Dimensions (in.)												Bolt Size (in.)	Bearing #	Housing #	Weight (lb.)
			a	e	g	x	s	s ₁	s ₂	b	f	Z	Bi					
1/2	UCFA201-8	54.14	4-1/64	3-1/16	15/32	1	25/64	25/64	1-37/64	2-3/8	2-1/8	1.312	1.220	5/16	UC201-8	FA204	1.12	
5/8	UCFA202-10														UC202-10			
3/4	UCFA204-12														UC204-12			
7/8	UCFA205-14	59.20	4-59/64	3-55/64	35/64	1-1/16	15/32	33/64	2	2-11/16	2-9/16	1.406	1.339	3/8	UC205-14	FA205	1.45	
15/16	UCFA205-15														UC205-15			
1	UCFA205-16														UC205-16			
1-1/16	UCFA206-17	69.60	5-43/64	4-39/64	35/64	1-7/32	15/32	33/64	2-9/32	3-5/32	2-53/64	1.593	1.500	3/8	UC206-17	FA206	2.20	
1-1/8	UCFA206-18														UC206-18			
1-3/16	UCFA206-19														UC206-19			
1-1/4	UCFA206-20	84.45													UC206-20	FA207	3.08	
1-1/4	UCFA207-20														UC207-20			
1-5/16	UCFA207-21														UC207-21			
1-3/8	UCFA207-22														UC207-22			
1-7/16	UCFA207-23	100.90													UC207-23	FA208	3.74	
1-1/2	UCFA208-24														UC208-24			
1-9/16	UCFA208-25														UC208-25			
1-5/8	UCFA209-26	109.65	7-1/8	5-53/64	45/64	1-1/2	5/8	43/64	2-53/64	4-1/4	3-35/64	2.063	1.937	1/2	UC209-26	FA209	4.4	
1-11/16	UCFA209-27														UC209-27			
1-3/4	UCFA209-28														UC209-28			
1-7/8	UCFA210-30	130.90	7-1/2	6-3/16	45/64	1-37/64	5/8	43/64	3	4-17/32	3-45/64	2.156	2.031	1/2	UC210-30	FA210	5.28	
1-15/16	UCFA210-31														UC210-31			
2	UCFA210-32														UC210-32			
2	UCFA211-32	163.50	8-5/8	7-1/4	25/32	1-11/16	5/8	43/64	3-3/8	5-1/8	4-3/32	2.297	2.189	1/2	UC211-32	FA211	7.48	
2-1/8	UCFA211-34														UC211-34			
2-3/16	UCFA211-35														UC211-35			
Dimensions (mm)																		
12	UCFA201	54.15	102	78	12	25.4	10	10	40	60	54	33.3	31	M8	UC201	FA204	1.12	
15	UCFA202														UC202			
17	UCFA203														UC203			
20	UCFA204	54.15	102	78	12	25.4	10	10	40	60	54	33.3	31	M8	UC204	FA204	1.03	
25	UCFA205	59.20	125	98	14	27	12	13	51	68	65	35.7	34	M10	UC205	FA205	1.47	
30	UCFA206	69.60	144	117	14	31	12	13	58	80	72	40.2	38.1	M10	UC206	FA206	2.23	
35	UCFA207	84.45	161	130	16	34	14	15	66	90	82	44.4	42.9	M12	UC207	FA207	3.12	
40	UCFA208	100.90	175	144	16	36	14	15	71	100	87	51.2	49.2	M12	UC208	FA208	3.79	
45	UCFA209	109.65	181	148	18	38	16	17	72	108	90	52.2	49.2	M14	UC209	FA209	4.46	
50	UCFA210	130.90	190	157	18	40	16	17	76	115	94	54.6	51.6	M14	UC210	FA210	5.35	
55	UCFA211	163.50	219	184	20	43	16	17	86	130	104	58.4	55.6		UC211	FA211	7.58	

Lubrication fitting tap size for 1" and smaller shaft sizes, 1/4-28 UNF; for all other sizes, 1/8-27 NPT

INTERCHANGES: UCFA





TWO-BOLT FLANGE UNITS

UCFL 200

NORMAL DUTY

**Set-Screw Locking
Wide Inner Ring
Cast Iron Housing
Insert Detail-pg.121-122
Covers Available-pg.60
Inch and Metric**

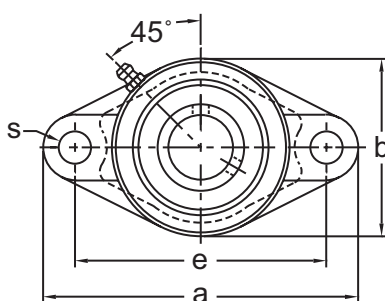

Shaft Diam. (in.)	AMI Unit #	List Price	Dimensions (in.)								Bolt Size (in.)	Bearing #	Housing #	Weight (lb.)												
			a	e	g	x	s	b	Z	Bi																
1/2	UCFL201-8	44.50	4-7/16	3-35/64	15/32	1	15/32	2-3/8	1.311	1.220	3/8	UC201-8	FL204	1.10												
5/8	UCFL202-10											UC202-10		1.06												
11/16	UCFL203-11											UC203-11		1.04												
3/4	UCFL204-12											UC204-12		0.99												
7/8	UCFL205-14	49.00	5-1/8	3-57/64	9/16	1-1/16	5/8	2-11/16	1.406	1.339	9/16	UC205-14	FL205	1.39												
15/16	UCFL205-15	49.00										UC205-15														
1	UCFL205-16	46.65										UC205-16														
1-1/16	UCFL206-17	64.95										5-13/16			4-39/64	9/16	1-7/32	5/8	3-1/8	1.583	1.500	9/16	UC206-17			
1-1/8	UCFL206-18		UC206-18	FL206	2.12																					
1-3/16	UCFL206-19		UC206-19																							
1-1/4	UCFL206-20		UC206-20																							
1-1/4	UCFL207-20	75.45	6-5/16			5-1/8	5/8	1-11/32	5/8	3-9/16	1.748	1.689	9/16	UC207-20	FL207	2.64										
1-5/16	UCFL207-21			UC207-21																						
1-3/8	UCFL207-22			UC207-22																						
1-7/16	UCFL207-23			UC207-23																						
1-1/2	UCFL208-24	89.40	6-7/8	5-43/64	5/8	1-13/32	5/8	3-15/16	2.016	1.937	9/16	UC208-24	FL208	3.53												
1-9/16	UCFL208-25											UC208-25														
1-5/8	UCFL209-26											99.60			7-3/8	5-53/64	23/32	1-1/2	3/4	4-1/4	2.055	1.937	5/8	UC209-26		
1-11/16	UCFL209-27																							UC209-27	FL209	4.19
1-3/4	UCFL209-28	UC209-28																								
1-7/8	UCFL210-30	118.35	7-3/4	6-3/16	23/32	1-9/16	3/4	4-1/2	2.150	2.031	5/8		UC210-30													
1-15/16	UCFL210-31											UC210-31	FL210	4.85												
2	UCFL210-32											UC210-32														
2	UCFL211-32											146.85			8-13/16	7-1/4	25/32	1-11/16	3/4	5-1/8	2.299	2.189	5/8	UC211-32		
2-1/8	UCFL211-34	UC211-34	FL211	7.05																						
2-3/16	UCFL211-35	UC211-35																								
2-1/4	UCFL212-36	189.85			9-13/16	7-61/64	25/32	1-7/8	29/32	5-1/2	2.705		2.563	3/4										UC212-36		
2-3/8	UCFL212-38											UC212-38			FL212	9.04										
2-7/16	UCFL212-39		UC212-39																							
2-1/2	UCFL213-40		UC213-40	FL213								11.24														
2-11/16	UCFL214-43	294.40	10-7/16		8-1/2	15/16	2-1/8	29/32	6-5/16	2.969	2.937		3/4	UC214-43												
2-3/4	UCFL214-44													UC214-44	FL214	13.22										
2-15/16	UCFL215-47													399.10			10-13/16	8-55/64	15/16	2-7/32	29/32	6-1/2	3.091	3.063	3/4	UC215-47
3	UCFL215-48			UC215-48								FL215														14.33
3-1/4	UCFL217-52	595.50	12	9-49/64	1-1/32	2-15/32	63/64	7-1/2	3.449	3.374	7/8		UC217-52													
3-7/16	UCFL217-55												UC217-55													
3-1/2	UCFL218-56												717.10	12-5/8	10-7/16	1-1/32	2-11/16	63/64	8-1/16	3.791	3.780	7/8	UC218-56	FL218	26.23	
Dimensions (mm)																										
12	UCFL201	44.50	113	90	12	25.4	12	60	33.3	31	M10	UC201	FL204	1.12												
15	UCFL202											UC202		1.07												
17	UCFL203											UC203		1.05												
20	UCFL204											44.50		113	90	12	25.4	12	60	33.3	31	M10	UC204	FL204	1.00	
25	UCFL205	49.00	130	99	14	27	16	68	35.7	34	M14	UC205	FL205	1.40												
30	UCFL206	64.95	148	117	14	31	16	80	40.2	38.1	M14	UC206	FL206	2.14												
35	UCFL207	75.45	161	130	16	34	16	90	44.4	42.9	M14	UC207	FL207	2.68												
40	UCFL208	89.40	175	144	16	36	16	100	51.2	49.2	M14	UC208	FL208	3.57												
45	UCFL209	99.60	188	148	18	38	19	108	52.2	49.2	M16	UC209	FL209	4.24												
50	UCFL210	118.35	197	157	18	40	19	115	54.6	51.6	M16	UC210	FL210	4.91												
55	UCFL211	146.85	224	184	20	43	19	130	58.4	55.6	M16	UC211	FL211	7.14												
60	UCFL212	189.85	250	202	20	48	23	140	68.7	65.1	M20	UC212	FL212	9.14												
65	UCFL213	244.60	258	210	24	50	23	155	69.7	65.1	M20	UC213	FL213	11.4												
70	UCFL214	294.40	265	216	24	54	23	160	75.4	74.6		UC214	FL214	13.4												
75	UCFL215	399.10	275	225	24	56	23	165	78.5	77.8		UC215	FL215	14.5												
80	UCFL216	552.10	290	233	24	58	25	180	83.3	82.6	M22	UC216	FL216	17.9												
85	UCFL217	595.50	305	248	26	63	25	190	87.6	85.7		UC217	FL217	21.2												
90	UCFL218	717.10	320	265	26	68	25	205	96.3	96		UC218	FL218	26.5												

Lubrication fitting tap size for 1" and smaller shaft sizes, 1/4-28 UNF; for all other sizes, 1/8-27 NPT



INTERCHANGES: UCFL

UCFT 200

TWO-BOLT FLANGE UNITS



NORMAL DUTY

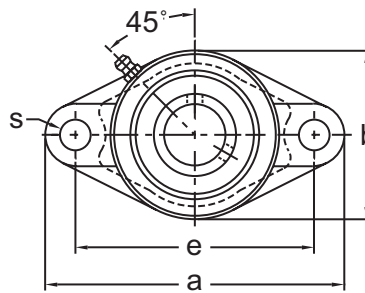

Set-Screw Locking
Wide Inner Ring
Cast Iron Housing
Insert Detail-pg.121-
122Inch and Metric

Shaft Diam. (in.)	AMI Unit #	List Price	Dimensions (in.)								Bolt Size (in.)	Bearing #	Housing #	Weight (lb.)
			a	e	g	x	s	b	Z	Bi				
1/2	UCFT201-8	44.50	3-29/32	3	7/16	31/32	13/32	2-7/32	1.302	1.024	3/8	UCW201-8	FT203	1.06
9/16	UCFT202-9											UCW202-9		1.04
5/8	UCFT202-10											UCW202-10		1.04
11/16	UCFT203-11											UCW203-11		1.01
3/4	UCFT204-12	44.50	4-13/32	3-17/32	7/16	31/32	13/32	2-3/8	1.283	1.220	3/8	UC204-12	FT204	1.01
7/8	UCFT205-14	49.00	4-7/8	3-57/64	17/32	1-1/16	1/2	2-3/4	1.401	1.339	7/16	UC205-14	FT205	1.41
15/16	UCFT205-15	49.00										UC205-15		
1	UCFT205-16	46.65										UC205-16		
1-1/16	UCFT206-17	64.95	5-9/16	4-19/32	17/32	1-3/16	1/2	3-1/4	1.577	1.500	7/16	UC206-17	FT206	2.12
1-1/8	UCFT206-18											UC206-18		
1-3/16	UCFT206-19											UC206-19		
1-1/4	UCFT206-20											UC206-20		
1-1/4	UCFT207-20	75.45	6-1/8	5-1/8	9/16	1-11/32	35/64	3-3/4	1.750	1.689	1/2	UC207-20	FT207	3.08
1-5/16	UCFT207-21											UC207-21		
1-3/8	UCFT207-22											UC207-22		
1-7/16	UCFT207-23											UC207-23		
1-1/2	UCFT208-24	89.40	6-3/4	5-21/32	9/16	1-1/2	35/64	4-1/8	2.017	1.937	1/2	UC208-24	FT208	3.97
1-9/16	UCFT208-25											UC208-25		
1-5/8	UCFT209-26	99.60	7-1/16	5-27/32	9/16	1-9/16	5/8	4-3/8	2.048	1.937	9/16	UC209-26	FT209	4.41
1-11/16	UCFT209-27											UC209-27		
1-3/4	UCFT209-28											UC209-28		
1-7/8	UCFT210-30	118.35	7-7/16	6-3/16	9/16	1-9/16	5/8	4-9/16	2.158	2.031	9/16	UC210-30	FT210	4.63
1-15/16	UCFT210-31											UC210-31		
2	UCFT210-32											UC210-32		
2	UCFT211-32	146.85	8-1/2	7-1/4	13/16	1-3/4	21/32	5-1/4	2.315	2.189	5/8	UC211-32	FT211	7.05
2-1/8	UCFT211-34											UC211-34		
2-3/16	UCFT211-35											UC211-35		
Dimensions (mm)														
12	UCFT201	44.50	99	76.2	11	25	10.5	56.5	33.1	26	M8	UCW201	FT203	1.07
15	UCFT202											UCW202		1.05
17	UCFT203											UCW203		1.03
20	UCFT204	44.50	112	89.7	11	25	10.5	60	32.6	31	M8	UC204	FT204	1.03
25	UCFT205	49.00	124	98.8	13	27	12.5	70	35.6	34	M10	UC205	FT205	1.43
30	UCFT206	64.95	141	116.7	13	30	12.5	83	40.1	38.1	M10	UC206	FT206	2.14
35	UCFT207	75.45	156	130.2	14	34	14	95	44.5	42.9	M12	UC207	FT207	3.12
40	UCFT208	89.40	171	143.7	14	38	14	105	51.2	49.2	M12	UC208	FT208	4.01
45	UCFT209	99.60	179	148.4	14	40	16	111	52	49.2	M14	UC209	FT209	4.46
50	UCFT210	118.35	189	157.2	14	40	16	116	54.8	51.6	M14	UC210	FT210	4.68
55	UCFT211	146.85	216	184.2	21	44	17	133	58.8	55.6	M16	UC211	FT211	7.14

Lubrication fitting tap size for 1" and smaller shaft sizes, 1/4-28 UNF; for all other sizes, 1/8-27 NPT

INTERCHANGES: VF2S-2 F2B-SC YCJT FX3U-N FC2-25 FYTB-TF SFT






TWO-BOLT FLANGE UNITS

BFT / KHFT200

NORMAL DUTY

Set-Screw/Eccentric Locking
Narrow Inner Ring
Cast Iron Housing
Insert Detail-pg.125,126
Inch and Metric



BFT 200 Type
Set-Screw Locking

KHFT 200 Type
Eccentric Collar Locking



Shaft Diam. (in.)	AMI Unit # Complete with B 200 Type	List Price	AMI Unit # Complete with KH 200 Type	List Price	Dimensions (in.)										Bolt Size (in.)	Bearing #		Housing #	Weight (lb.)
					a	e	g	x	s	b	Z		Bi	L		B	KH		
1/2	BFT201-8	42.60	KHFT201-8	43.20	3-29/32	3	7/16	31/32	13/32	2-7/32	1.303	1.543	0.866	1-1/8	3/8	B1-8	KH201-8	FT203	0.86
5/8	BFT202-10	42.60	KHFT202-10	43.20	4-13/32	3-17/32	7/16	31/32	13/32	2-3/8	1.260	1.488	0.972	1-7/32	3/8	B2-10	KH202-10	FT204	1.01
3/4	BFT204-12	42.60	KHFT204-12	43.20	4-13/32	3-17/32	7/16	31/32	13/32	2-3/8	1.260	1.488	0.972	1-7/32	3/8	B4-12	KH204-12	FT204	1.01
7/8	BFT205-14	45.20	KHFT205-14	47.10	4-7/8	3-57/64	17/32	1-1/16	1/2	2-3/4	1.394	1.551	1.063	1-7/32	7/16	B5-14	KH205-14	FT205	1.43
15/16	BFT205-15	45.20	KHFT205-15	47.10	4-7/8	3-57/64	17/32	1-1/16	1/2	2-3/4	1.394	1.551	1.063	1-7/32	7/16	B5-15	KH205-15	FT205	1.43
1	BFT205-16	42.85	KHFT205-16	47.10	4-7/8	3-57/64	17/32	1-1/16	1/2	2-3/4	1.394	1.551	1.063	1-7/32	7/16	B5-16	KH205-16	FT205	1.43
1-1/16	BFT206-17	63.20	—	66.45	5-9/16	4-19/32	17/32	1-3/16	1/2	3-1/4	1.583	1.756	1.193	1-13/32	7/16	B6-17	—	FT206	2.12
1-1/8	BFT206-18	63.20	KHFT206-18	66.45	5-9/16	4-19/32	17/32	1-3/16	1/2	3-1/4	1.583	1.756	1.193	1-13/32	7/16	B6-18	KH206-18	FT206	2.12
1-3/16	BFT206-19	63.20	KHFT206-19	66.45	5-9/16	4-19/32	17/32	1-3/16	1/2	3-1/4	1.583	1.756	1.193	1-13/32	7/16	B6-19	KH206-19	FT206	2.12
1-1/4	BFT206-20	63.20	KHFT206-20	66.45	5-9/16	4-19/32	17/32	1-3/16	1/2	3-1/4	1.583	1.756	1.193	1-13/32	7/16	B6-20	KH206-20	FT206	2.12
1-1/4	BFT207-20	72.60	KHFT207-20	80.00	6-1/8	5-1/8	9/16	1-11/32	35/64	3-3/4	1.713	1.909	1.295	1-17/32	1/2	B7-20	KH207-20	FT207	3.1
1-5/16	BFT207-21	72.60	KHFT207-21	80.00	6-1/8	5-1/8	9/16	1-11/32	35/64	3-3/4	1.713	1.909	1.295	1-17/32	1/2	B7-21	KH207-21	FT207	3.1
1-3/8	BFT207-22	72.60	KHFT207-22	80.00	6-1/8	5-1/8	9/16	1-11/32	35/64	3-3/4	1.713	1.909	1.295	1-17/32	1/2	B7-22	KH207-22	FT207	3.1
1-7/16	BFT207-23	72.60	KHFT207-23	80.00	6-1/8	5-1/8	9/16	1-11/32	35/64	3-3/4	1.713	1.909	1.295	1-17/32	1/2	B7-23	KH207-23	FT207	3.1
1-1/2	BFT208-24	101.35	KHFT208-24	91.20	6-3/4	5-21/32	9/16	1-1/2	35/64	4-1/8	1.870	2.114	1.398	1-23/32	1/2	B8-24	KH208-24	FT208	3.97
1-5/8	—	—	KHFT209-26	103.65	7-1/16	5-27/32	9/16	1-9/16	5/8	4-3/8	—	2.146	—	1-23/32	9/16	—	KH209-26	FT209	4.36
1-11/16	—	—	KHFT209-27	103.65	7-1/16	5-27/32	9/16	1-9/16	5/8	4-3/8	—	2.146	—	1-23/32	9/16	—	KH209-27	FT209	4.36
1-3/4	—	—	KHFT209-28	103.65	7-1/16	5-27/32	9/16	1-9/16	5/8	4-3/8	—	2.146	—	1-23/32	9/16	—	KH209-28	FT209	4.36
1-7/8	—	—	KHFT210-30	119.40	7-7/16	6-3/16	9/16	1-9/16	5/8	4-9/16	—	2.161	—	1-23/32	9/16	—	KH210-30	FT210	4.56
1-15/16	—	—	KHFT210-31	119.40	7-7/16	6-3/16	9/16	1-9/16	5/8	4-9/16	—	2.161	—	1-23/32	9/16	—	KH210-31	FT210	4.56
2	—	—	KHFT211-32	160.10	8-1/2	7-1/4	13/16	1-3/4	21/32	5-1/4	—	2.433	—	1-29/32	5/8	—	KH211-32	FT211	6.85
2-3/16	—	—	KHFT211-35	160.10	8-1/2	7-1/4	13/16	1-3/4	21/32	5-1/4	—	2.433	—	1-29/32	5/8	—	KH211-35	FT211	6.85
Dimensions (mm)																			
12	BFT201	42.60	KHFT201	43.20	99	76.2	11	25	10.5	56.5	33.1	39.2	22	28.6	M8	B1	KH201	FT203	0.86
15	BFT202	42.60	KHFT202	43.20	99	76.2	11	25	10.5	56.5	33.1	39.2	22	28.6	M8	B2	KH202	FT203	0.86
17	BFT203	42.60	KHFT203	43.20	99	76.2	11	25	10.5	56.5	33.1	39.2	22	28.6	M8	B3	KH203	FT203	0.83
20	BFT204	42.60	KHFT204	43.20	112	89.7	11	25	10.5	60	32.0	37.8	24.7	31	M8	B4	KH204	FT204	1.01
25	BFT205	45.20	KHFT205	47.10	124	98.8	13	27	12.5	70	35.4	39.4	27	31	M10	B5	KH205	FT205	1.43
30	BFT206	63.20	KHFT206	66.45	141	116.7	13	30	12.5	83	40.2	44.6	30.3	35.7	M10	B6	KH206	FT206	2.12
35	BFT207	72.60	KHFT207	80.00	156	130.2	14	34	14	95	43.5	48.5	32.9	38.9	M12	B7	KH207	FT207	3.10
40	BFT208	101.35	KHFT208	91.20	171	143.7	14	38	14	105	47.5	53.7	35.5	43.7	M12	B8	KH208	FT208	3.97
45	—	—	KHFT209	103.65	179	148.4	14	40	16	111	—	54.5	—	43.7	M14	—	KH209	FT209	4.36
50	—	—	KHFT210	119.40	189	157.2	14	40	16	116	—	54.9	—	43.7	M14	—	KH210	FT210	4.56
55	—	—	KHFT211	160.10	216	184.2	21	44	17	133	—	61.8	—	48.7	M16	—	KH211	FT211	7.12

Lubrication fitting tap size for 1" and smaller shaft sizes, 1/4-28 UNF; for all other sizes, 1/8-27 NPT

INTERCHANGES: VF2E-1 F2B-SXV VCJT FX3W-U FYT-FM AELFL VFT-E



Fafnir® "RCJT" Style

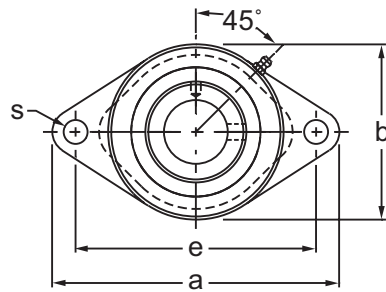

**Eccentric Locking
Wide Inner Ring
Cast Iron Housing
Insert Detail-pg.124
Inch and Metric**

Shaft Diam. (in.)	AMI Unit #	List Price	Dimensions (in.)								Bolt Size (in.)	Bearing #	Housing #	Weight (lb.)
			a	e	g	x	s	b	Z	L				
1/2	UGFJT201-8	54.80	3-57/64	3	13/32	1	29/64	2-1/4	1.591	1-15/32	3/8	UGW201-8	FJT203	1.35
5/8	UGFJT202-10	54.80	4-13/32	3-17/32	13/32	1-7/64	29/64	2-13/32	1.795	1-23/32	3/8	UGW202-10	FJT204	1.30
3/4	UGFJT204-12		4-7/8	3-57/64	7/16	1-9/64	29/64	2-3/4	1.807	1-3/4	7/16	UG205-14	FJT205	1.35
7/8	UGFJT205-14	62.60	4-7/8	3-57/64	7/16	1-9/64	29/64	2-3/4	1.807	1-3/4	7/16	UG205-15	FJT205	1.35
15/16	UGFJT205-15											UG205-16		
1	UGFJT205-16													
1-1/8	UGFJT206-18	77.90	5-19/32	4-19/32	31/64	1-9/64	29/64	3-9/64	1.972	1-29/32	7/16	UG206-18	FJT206	2.30
1-3/16	UGFJT206-19											UG206-19		
1-1/4	UGFJT206-20											UG206-20		
1-1/4	UGFJT207-20	95.20	6-7/64	5-1/8	31/64	1-1/4	9/16	3-5/8	2.098	2-1/64	1/2	UG207-20	FJT207	3.25
1-5/16	UGFJT207-21											UG207-21		
1-3/8	UGFJT207-22											UG207-22		
1-7/16	UGFJT207-23											UG207-23		
1-1/2	UGFJT208-24	107.90	6-3/4	5-21/32	33/64	1-11/32	9/16	4-1/8	2.319	2-7/32	1/2	UG208-24	FJT208	4.65
1-9/16	*UGFJT208-25											UG208-25		
1-5/8	UGFJT209-26	116.80	7-13/32	5-27/32	33/64	1-3/8	9/16	4-3/8	2.319	2-7/32	1/2	UG209-26	FJT209	5.60
1-11/16	UGFJT209-27											UG209-27		
1-3/4	UGFJT209-28											UG209-28		
1-7/8	UGFJT210-30	150.60	7-1/2	6-3/16	33/64	1-17/32	43/64	4-9/16	2.602	2-15/32	5/8	UG210-30	FJT210	5.95
1-15/16	UGFJT210-31											UG210-31		
2	UGFJT210-32											UG210-32		
2	UGFJT211-32	197.00	8-3/4	7-1/4	19/32	1-45/64	43/64	5-1/4	2.937	2-13/16	5/8	UG211-32	FJT211	8.05
2-1/8	UGFJT211-34											UG211-34		
2-3/16	UGFJT211-35											UG211-35		
Dimensions (mm)														
20	UGFJT204	54.80	112	90	10	28	11.5	61	45.6	43.7	M10	UG204	FJT204	1.30
25	UGFJT205	62.60	124	99	11	29	11.5	70	45.9	44.4		UG205	FJT205	1.35
30	UGFJT206	77.90	142	116.5	12	29	11.5	80	50.1	48.4		UG206	FJT206	2.30
35	UGFJT207	95.20	155	130	12	31	14	92	53.3	51.1	M12	UG207	FJT207	3.25
40	UGFJT208	107.90	172	143.5	13	34	14	105	58.9	56.3		UG208	FJT208	4.65
45	UGFJT209	116.80	188	148.5	13	35	14	111	58.9	56.3		UG209	FJT209	5.60
50	UGFJT210	150.60	190	157	13	39	17	116	66.1	62.7	M16	UG210	FJT210	5.95
55	UGFJT211	197.00	222	184	15	43	17	134	74.6	71.4		UG211	FJT211	8.05

*Consult factory for availability

Lubrication fitting tap size for 1" and smaller shaft sizes, 1/4-28 UNF; for all other sizes, 1/8-27 NPT

INTERCHANGES: VF2E-2 F2B-SXR RCJT FYT-WM UELFLU RFT-E





PILOTED TWO-BOLT FLANGE UNITS

UGCJTZ 200

NORMAL DUTY

Eccentric Locking
Wide Inner Ring
Cast Iron Housing
Insert Detail-pg.124
Inch and Metric





Shaft Diam. (in.)	AMI Unit #	List Price	Dimensions (in.)										Bolt Size (in.)	Bearing #	Housing #	Weight (lb.)
			a	e	g	x	s	b	J	f	Z	L				
3/4	UGCJTZ204-12	65.75	4-13/32	3.543	25/64	1-7/32	0.453	2-23/64	0.138	2.165	1.795	1-23/32	3/8	UG204-12	CJTZ204	1.28
7/8	UGCJTZ205-14	76.80	4-7/8	3.898	15/32	1-1/32	0.453	2-3/4	0.138	2.362	1.807	1-3/4	7/16	UG205-14	CJTZ205	1.59
15/16	UGCJTZ205-15													UG205-15		
1	UGCJTZ205-16													UG205-16		
1-1/8	UGCJTZ206-18	88.50	5-19/32	4.587	15/32	1-1/32	0.453	3-17/64	0.118	3.150	1.854	1-29/32	7/16	UG206-18	CJTZ206	2.14
1-3/16	UGCJTZ206-19													UG206-19		
1-1/4	UGCJTZ206-20													UG206-20		
1-1/4	UGCJTZ207-20	117.75	6-7/64	5.118	15/32	1-1/32	0.551	3-45/64	0.157	3.543	1.941	2-1/64	1/2	UG207-20	CJTZ207	2.8
1-5/16	UGCJTZ207-21													UG207-21		
1-3/8	UGCJTZ207-22													UG207-22		
1-7/16	UGCJTZ207-23													UG207-23		
1-1/2	UGCJTZ208-24	136.60	6-49/64	5.650	17/32	1-3/16	0.551	4-1/8	0.157	3.937	2.161	2-7/32	1/2	UG208-24	CJTZ208	3.76
1-9/16	*UGCJTZ208-25													UG208-25		
1-5/8	UGCJTZ209-26	154.20	7-5/64	5.846	17/32	1-7/32	0.551	4-3/8	0.157	4.134	2.161	2-7/32	1/2	UG209-26	CJTZ209	4.42
1-11/16	UGCJTZ209-27													UG209-27		
1-3/4	UGCJTZ209-28													UG209-28		
1-7/8	UGCJTZ210-30	177.60	7-1/2	6.181	17/32	1-3/8	0.551	4-9/16	0.157	4.134	2.445	2-15/32	1/2	UG210-30	CJTZ210	4.83
1-15/16	UGCJTZ210-31													UG210-31		
2	UGCJTZ210-32													UG210-32		
Dimensions (mm)																
20	UGCJTZ204	65.75	112	90	10	31	11.5	60	3.5	55	45.6	43.7	M10	UG204	CJTZ 204	1.28
25	UGCJTZ205	76.80	124	99	12	26	11.5	70	3.5	60	45.9	44.4		UG205	CJTZ 205	1.59
30	UGCJTZ206	88.50	142	116.5	12	26	11.5	83	3.0	80	47.1	48.4		UG206	CJTZ 206	2.14
35	UGCJTZ207	117.75	155	130	12	26	14	94	4.0	90	49.3	51.1	M12	UG207	CJTZ 207	2.80
40	UGCJTZ208	136.60	172	143.5	13	30	14	105	4.0	100	54.9	56.3		UG208	CJTZ 208	3.76
45	UGCJTZ209	154.20	180	148.5	13	31	14	111	4.0	105	54.9	56.3		UG209	CJTZ 209	4.42
50	UGCJTZ210	177.60	190	157	13	35	14	116	4.0	105	62.1	62.7	M12	UG210	CJTZ 210	4.83

*Consult factory for availability

Lubrication fitting tap size for 1" and smaller shaft sizes, 1/4-28 UNF; for all other sizes, 1/8-27 NPT

INTERCHANGES: RCJTZ

BLFL 200 Type
Set-Screw LockingKHLFL 200 Type
Eccentric Collar Locking

Set-Screw/Eccentric Locking
Narrow Inner Ring
Cast Iron Housing
Insert Detail-pg.125,126
Inch and Metric

Shaft Diam. (in.)	AMI Unit # Complete with B 200 Type	List Price	AMI Unit # Complete with KH 200 Type	List Price	Dimensions (in.)										Bolt Size (in.)	Bearing #		Housing #	Weight (lb.)
					a	e	g	x	s	b	Z		Bi	L		B	KH		
											BLFL	KHLFL							
1/2	BLFL1-8	37.45	KHLFL201-8	38.85	3-3/16	2-1/2	3/8	23/32	9/32	2-3/16	1.004	1.244	0.866	1-1/8	1/4	B1-8	KH201-8	LFL3	0.66
5/8	BLFL2-10		KHLFL202-10														B2-10	KH202-10	
3/4	BLFL4-12	37.95	KHLFL204-12	40.55	3-9/16	2-13/16	7/16	25/32	25/64	2-15/32	1.130	1.358	0.972	1-7/32	5/16	B4-12	KH204-12	LFL4	0.76
7/8	BLFL5-14	41.20	KHLFL205-14	43.10	3-3/4	3	7/16	25/32	25/64	2-23/32	1.201	1.358	1.063	1-7/32	5/16	B5-14	KH205-14	LFL5	0.98
15/16	BLFL5-15		KHLFL205-15													B5-15	KH205-15		
1	BLFL5-16		KHLFL205-16													B5-16	KH205-16		
1-1/16	BLFL6-17	56.25	—	59.50	4-7/16	3-9/16	15/32	7/8	15/32	3-3/32	1.350	1.524	1.193	1-13/32	3/8	B6-17	—	LFL6	1.42
1-1/8	BLFL6-18		KHLFL206-18													B6-18	KH206-18		
1-3/16	BLFL6-19		KHLFL206-19													B6-19	KH206-19		
1-1/4	BLFL6-20		KHLFL206-20													B6-20	KH206-20		
1-1/4	BLFL7-20	70.85	KHLFL207-20	78.25	4-13/16	3-15/16	1/2	15/16	15/32	3-1/2	1.472	1.669	1.295	1-17/32	3/8	B7-20	KH207-20	LFL7	2.05
1-5/16	BLFL7-21		KHLFL207-21													B7-21	KH207-21		
1-3/8	BLFL7-22		KHLFL207-22													B7-22	KH207-22		
1-7/16	BLFL7-23		KHLFL207-23													B7-23	KH207-23		
Dimensions (mm)																			
12	BLFL1	37.45	KHLFL201	38.85	81	63.5	9.5	18	7	56	25.5	31.6	22	28.6	M6	B1	KH201	LFL3	0.66
15	BLFL2		KHLFL202													B2	KH202		0.64
17	BLFL3		KHLFL203													B3	KH203		0.60
20	BLFL4	37.95	KHLFL204	40.55	90	71.5	11	20	10	63	28.7	34.5	24.7	31	M8	B4	KH204	LFL4	0.76
25	BLFL5	41.20	KHLFL205	43.10	95	76	11	20	10	69	30.5	34.5	27	31	M8	B5	KH205	LFL5	0.98
30	BLFL6	56.25	KHLFL206	59.50	113	90.5	12	22.5	12	79	34.3	38.7	30.3	35.7	M10	B6	KH206	LFL6	1.42
35	BLFL7	70.85	KHLFL207	78.25	122	100	13	24	12	89	37.4	42.4	32.9	38.9	M10	B7	KH207	LFL7	2.05

Lubrication fitting tap size for 1" and smaller shaft sizes, 1/4-28 UNF; for all other sizes, 1/8-27 NPT

INTERCHANGES: BLF ALF SALF






TWO-BOLT FLANGE UNITS

BFX / KHFX 200

NORMAL DUTY

Set-Screw/Eccentric Locking
Narrow Inner Ring
Ductile Iron Housing
Insert Detail-pg.125,126
Inch and Metric



BFX 200 Type
Set-Screw Locking

KHFX 200 Type
Eccentric Collar Locking



Shaft Diam. (in.)	AMI Unit # Complete with B 200 Type	List Price	AMI Unit # Complete with KH 200 Type	List Price	Dimensions (in.)										Bolt Size (in.)	Bearing #		Housing #	Weight (lb.)
					a	e	g	x	s	b	Z		Bi	L		B	KH		
											BFX	KHFX							
1/2	BFX201-8	50.55	KHFX201-8	51.95	3-3/16	2-1/2	3/8	23/32	9/32	2-3/16	1.004	1.244	0.866	1-1/8	1/4	B1-8	KH201-8	FX203	0.57
5/8	BFX202-10		KHFX202-10													B2-10	KH202-10		0.55
3/4	BFX204-12	51.05	KHFX204-12	52.45	3-9/16	2-13/16	27/64	25/32	11/32	2-15/32	1.130	1.358	0.972	1-7/32	5/16	B4-12	KH204-12	FX204	0.62
7/8	BFX205-14		KHFX205-14													B5-14	KH205-14		
15/16	BFX205-15	53.55	KHFX205-15	55.45	3-3/4	3	27/64	25/32	11/32	2-1/2	1.201	1.358	1.063	1-7/32	5/16	B5-15	KH205-15	FX205	0.79
1	BFX205-16		KHFX205-16													B5-16	KH205-16		
1-1/16	BFX206-17		—													B6-17	—		
1-1/8	BFX206-18	64.95	KHFX206-18	68.20	4-7/16	3-9/16	15/32	7/8	13/32	3-3/32	1.350	1.524	1.193	1-13/32	3/8	B6-18	KH206-18	FX206	1.23
1-3/16	BFX206-19		KHFX206-19													B6-19	KH206-19		
1-1/4	BFX206-20		KHFX206-20													B6-20	KH206-20		
1-1/4	BFX207-20		KHFX207-20													B7-20	KH207-20		
1-5/16	BFX207-21	79.60	KHFX207-21	87.00	4-13/16	3-15/16	1/2	15/16	13/32	3-1/2	1.472	1.669	1.295	1-17/32	3/8	B7-21	KH207-21	FX207	1.74
1-3/8	BFX207-22		KHFX207-22													B7-22	KH207-22		
1-7/16	BFX207-23		KHFX207-23													B7-23	KH207-23		
Dimensions (mm)																			
12	BFX201		KHFX201	51.95	81	64	10	18	7	56	25.5	31.6	22	28.6	M6	B1	KH201		0.58
15	BFX202	50.55	KHFX202													B2	KH202	FX203	0.56
17	BFX203		KHFX203													B3	KH203		0.54
20	BFX204	51.05	KHFX204	52.45	90	71	11	20	9	63	28.7	34.5	24.7	31	M8	B4	KH204	FX204	0.62
25	BFX205	53.55	KHFX205	55.45	95	76	11	20	9	63.5	30.5	34.5	27	31	M8	B5	KH205	FX205	0.80
30	BFX206	64.95	KHFX206	68.20	113	90	12	22.5	10.3	78.6	34.3	38.7	30.3	35.7	M10	B6	KH206	FX206	1.25
35	BFX207	79.60	KHFX207	87.00	122	100	13	24	10.3	89	37.4	42.4	32.9	38.9	M10	B7	KH207	FX207	1.76




Lubrication fitting tap size 1/4-28 UNF

INTERCHANGES:	VF2S-1M	LFT-SC	VFTD	FB160	FXW-U	LFT	VF2E-1M	LFT-SXV	LFTE-E
----------------------	----------------	---------------	-------------	--------------	--------------	------------	----------------	----------------	---------------

BLCTE / KHLCTE 200 TWO-BOLT FLANGE UNITS



NORMAL DUTY



**Set-Screw/Eccentric Locking
Narrow Inner Ring
Cast Iron Housing
Non-Relube
Insert Detail-pg.125,126
Inch and Metric**

BLCTE 200 Type Set-Screw Locking KHLCTE 200 Type Eccentric Collar Locking

Shaft Diam. (in.)	AMI Unit # Complete with B 200 Type	List Price	AMI Unit # Complete with KH 200 Type	List Price	Dimensions (in.)								Bolt Size (in.)	Bearing #		Housing #	Weight (lb.)	
					a	e	g	s	b	Z		Bi		L	B			KH
										BLCTE	KHLCTE							
1/2	BLCTE201-8	50.30	KHLCTE201-8	51.70	3-3/16	2-1/2	19/32	9/32	2-5/16	0.965	1.204	0.866	1-1/8	1/4	B1-8	KH201-8	LCTE203	0.53
5/8	BLCTE202-10		KHLCTE202-10												B2-10	KH202-10		
3/4	BLCTE204-12	50.80	KHLCTE204-12	52.20	3-9/16	2-13/16	43/64	25/64	2-5/8	1.071	1.299	0.972	1-7/32	5/16	B4-12	KH204-12	LCTE204	0.98
7/8	BLCTE205-14		KHLCTE205-14												B5-14	KH205-14		
15/16	BLCTE205-15	53.65	KHLCTE205-15	55.55	3-13/16	3	11/16	25/64	2-51/64	1.161	1.319	1.063	1-7/32	5/16	B5-15	KH205-15	LCTE205	1.18
1	BLCTE205-16		KHLCTE205-16												B5-16	KH205-16		
1-1/16	BLCTE206-17		—												B6-17	—		
1-1/8	BLCTE206-18	74.70	KHLCTE206-18	77.95	4-7/16	3-9/16	13/16	15/32	3-5/16	1.350	1.524	1.193	1-13/32	3/8	B6-18	KH206-18	LCTE206	1.85
1-3/16	BLCTE206-19		KHLCTE206-19												B6-19	KH206-19		
1-1/4	BLCTE206-20		KHLCTE206-20												B6-20	KH206-20		
1-1/4	BLCTE207-20		KHLCTE207-20												B7-20	KH207-20		
1-5/16	BLCTE207-21	86.90	KHLCTE207-21	94.30	4-31/32	3-15/16	7/8	15/32	3-11/16	1.453	1.649	1.295	1-17/32	3/8	B7-21	KH207-21	LCTE207	2.43
1-3/8	BLCTE207-22		KHLCTE207-22												B7-22	KH207-22		
1-7/16	BLCTE207-23		KHLCTE207-23												B7-23	KH207-23		
Dimensions (mm)																		
12	BLCTE201		KHLCTE201	51.70	81	63.5	15	7	59	24.5	30.6	22	28.6	M6	B1	KH201	LCTE203	0.53
15	BLCTE202	50.30	KHLCTE202												B2	KH202		
17	BLCTE203		KHLCTE203												B3	KH203		
20	BLCTE204	50.80	KHLCTE204	52.20	90	71.4	17	10	67	27.2	33.0	24.7	31	M8	B4	KH204	LCTE204	0.98
25	BLCTE205	53.65	KHLCTE205	55.55	97	76.2	17.5	10	71	29.5	33.5	27	31	M8	B5	KH205	LCTE205	1.18
30	BLCTE206	74.70	KHLCTE206	77.95	113	90.5	20.5	12	84	34.3	38.7	30.3	35.7	M10	B6	KH206	LCTE206	1.85
35	BLCTE207	86.90	KHLCTE207	94.30	126	100	22	12	94	36.9	41.9	32.9	38.9	M10	B7	KH207	LCTE207	2.43

INTERCHANGES: FLCT ASFD FLCTEY AELFD





PRESSED STEEL TWO-BOLT FLANGE UNITS

BPFL / KHPFL 200

NORMAL DUTY


Set-Screw/Eccentric Locking
Narrow Inner Ring
Pressed Steel Housing
Non-Relube
Insert Detail-pg.125,126
Inch and Metric



BPFL 200 Type
Set-Screw Locking

KHPFL 200 Type
Eccentric Collar Locking

Shaft Diam. (in.)	AMI Unit # Complete with B 200 Type	List Price	AMI Unit # Complete with KH 200 Type	List Price	Dimensions (in.)									Stamping Load Limit (lbs.)	Bolt Size (in.)	Bearing #		Housing #	Weight (lb.)	
					a	e	t	b	s	C	F(Min)	Bi	L			B	KH			
1/2	BPFL1-8	36.75	KHPFL201-8	38.15	3-3/16	2-1/2	0.079	9/16	9/32	2-5/16	1-15/16	0.866	1-1/8	600	1/4	B1-8	KH201-8	PFL3	0.59	
5/8	BPFL2-10		KHPFL202-10		3-3/8	2-1/4	0.079	9/16	9/32	2-5/16	1-15/16	0.866	1-1/8			B2-10	KH202-10		0.57	
3/4	BPFL4-12	37.25	KHPFL204-12	38.65	3-9/16	2-13/16	0.079	5/8	11/32	2-5/8	2-3/16	0.972	1-7/32	700	5/16	B4-12	KH204-12	PFL4	0.73	
7/8	BPFL5-14	38.00	KHPFL205-14	39.90	3-3/4	3	0.079	11/16	11/32	2-51/64	2-3/8	1.063	1-7/32	800	5/16	B5-14	KH205-14	PFL5	0.88	
15/16	BPFL5-15		KHPFL205-15													B5-15	KH205-15			
1	BPFL5-16		KHPFL205-16													B5-16	KH205-16			
1-1/16	BPFL6-17	49.00	—	52.25	4-7/16	3-9/16	0.102	11/16	13/32	3-5/16	2-13/16	1.193	1-13/32	1100	3/8	B6-17	—	PFL6	1.36	
1-1/8	BPFL6-18		KHPFL206-18													B6-18	KH206-18			
1-3/16	BPFL6-19		KHPFL206-19													B6-19	KH206-19			
1-1/4	BPFL6-20		KHPFL206-20													B6-20	KH206-20			
1-1/4	BPFL7-20	61.45	KHPFL207-20	68.85	4-15/16	3-15/16	0.102	13/16	13/32	3-11/16	3-3/16	1.295	1-17/32	1400	3/8	B7-20	KH207-20	PFL7	1.78	
1-5/16	BPFL7-21		KHPFL207-21													B7-21	KH207-21			
1-3/8	BPFL7-22		KHPFL207-22													B7-22	KH207-22			
1-3/8	BPFL7-23		KHPFL207-23													B7-23	KH207-23			
1-7/16	BPFL7-24		KHPFL207-24													B7-24	KH207-24			
Dimensions (mm)																				
12	BPFL1	36.75	KHPFL201	38.15	81	63.5	2	14	7	59	49	22	28.6	600	M6	B1	KH201	PFL3	0.59	
15	BPFL2		KHPFL202		B2	KH202	0.57													
17	BPFL3		KHPFL203		B3	KH203	0.60													
20	BPFL4	37.25	KHPFL204	38.65	90	71.5	2	16	9	67	56	24.7	31	700	M8	B4	KH204	PFL4	0.73	
25	BPFL5	38.00	KHPFL205	39.90	95	76	2	18	9	71	60	27	31	800	M8	B5	KH205	PFL5	0.88	
30	BPFL6	49.00	KHPFL206	52.25	113	90.5	2.6	18	11	84	71	30.3	35.7	1100	M10	B6	KH206	PFL6	1.36	
35	BPFL7	61.45	KHPFL207	68.85	125	100	2.6	20	11	94	81	32.9	38.9	1400	M10	B7	KH207	PFL7	1.78	
INTERCHANGES:		SSF2S	F2B-SL	SBPFL	FB110S	RATY	FPS2-25	SSFT	SSF2E	F2B-SLX	RAT	FT-FM	SSF2-E							

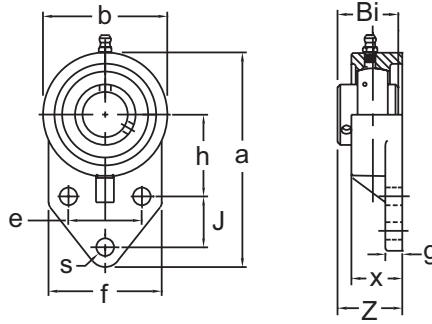

Set-Screw Locking
Wide Inner Ring
Cast Iron Housing
Insert Detail-pg.121-122
Inch and Metric

Shaft Diam. (in.)	AMI Unit #	List Price	Dimensions (in.)											Bolt Size (in.)	Bearing #	Housing #	Weight (lb.)
			a	h	e	J	g	x	s	b	f	Z	Bi				
1/2 5/8 11/16 3/4	UCFB201-8 UCFB202-10 UCFB203-11 UCFB204-12	60.25	4-1/4	1-11/16	1-1/2	7/8	5/16	1	25/64	2-1/2	2-3/8	1-11/32	1.220	3/8	UC201-8 UC202-10 UC203-11 UC204-12	FB204	1.50
7/8 15/16 1	UCFB205-14 UCFB205-15 UCFB205-16	66.90	4-3/4	1-13/16	1-5/8	1-1/8	1/2	1-1/8	25/64	2-3/4	2-1/2	1-7/16	1.339	3/8	UC205-14 UC205-15 UC205-16	FB205	2.00
1-1/16 1-1/8 1-3/16 1-1/4	UCFB206-17 UCFB206-18 UCFB206-19 UCFB206-20	81.95	5-3/8	2-1/16	1-7/8	1-1/4	1/2	1-1/4	25/64	3-1/4	2-3/4	1-39/64	1.500	3/8	UC206-17 UC206-18 UC206-19 UC206-20	FB206	2.50
1-1/4 1-5/16 1-3/8 1-7/16	UCFB207-20 UCFB207-21 UCFB207-22 UCFB207-23	96.95	6-1/8	2-3/8	2	1-1/4	1/2	1-7/16	33/64	3-3/4	3-1/4	1-53/64	1.689	1/2	UC207-20 UC207-21 UC207-22 UC207-23	FB207	2.90
1-1/2 1-9/16	UCFB208-24 UCFB208-25	122.40	6-15/32	2-3/8	1-31/32	1-5/8	5/8	1-13/32	15/32	3-15/16	3-1/16	2-1/64	1.937	7/16	UC208-24 UC208-25	FB208	3.50
1-5/8 1-11/16 1-3/4	UCFB209-26 UCFB209-27 UCFB209-28	132.30	6-27/32	2-9/16	2-1/8	1-11/16	23/32	1-1/2	15/32	4-3/16	3-5/32	2-3/64	1.937	7/16	UC209-26 UC209-27 UC209-28	FB209	4.90
1-7/8 1-15/16 2	UCFB210-30 UCFB210-31 UCFB210-32	148.80	7-1/2	2-15/16	2-3/4	1-5/8	1/2	1-1/2	33/64	4-5/8	4	2-9/64	2.031	1/2	UC210-30 UC210-31 UC210-32	FB210	5.40
Dimensions (mm)																	
12 15 17	UCFK201 UCFK202 UCFK203	60.25	110	42	32	27	13	25.5	10	62	52	33.3	31	M8	UC201 UC202 UC203	FK204	1.34 1.29 1.27
20 25 30	UCFK204 UCFK205 UCFK206	60.25 66.90 81.95	110 116 130	42 45 50	32 34 40	27 27 29	13 13 13	25.5 27 31	10 10 10	62 68 78	52 56 65	33.3 35.7 40.2	31 34 38.1	M8	UC204 UC205 UC206	FK204 FK205 FK206	1.23 1.47 2.07
35 40 45	UCFK207 UCFK208 UCFK209	96.95 122.40 132.30	144 164 174	55 60 65	46 50 54	32 41 43	15 16 18	34 36 38	10 12 12	90 100 106	70 78 80	44.4 51.2 52.2	42.9 49.2 49.2	M8 M10 M10	UC207 UC208 UC209	FK207 FK208 FK209	2.90 3.79 4.24
50	UCFK210	148.80	184	68	58	46	18	40	12	112	86	54.6	51.6	M10	UC210	FK210	4.91

Lubrication fitting tap size for 1" and smaller shaft sizes, 1/4-28 UNF; for all other sizes, 1/8-27 NPT

INTERCHANGES: VFB FB-SC UCFB FB3U-N MFB-25 UCFH FB




THREE-BOLT FLANGE UNITS


BTM / KHTM 200

NORMAL DUTY

Set-Screw/Eccentric Locking
Narrow Inner Ring
Ductile Iron Housing
Insert Detail-pg.125,126
Inch



BTM 200 Type
Set-Screw Locking

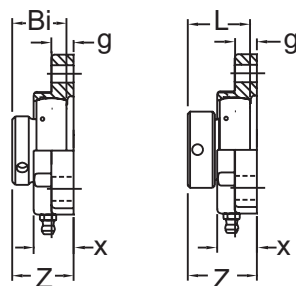

KHTM 200 Type
Eccentric Collar Locking






Shaft Diam. (in.)	AMI Unit #	List Price	Dimensions (in.)								Bolt Size (in.)	Bearing #	Housing #	Weight (lb.)
			a	e	g	x	s	b	Z	Bi				
1/2	BTM201-8	51.85	3-3/16	2-1/2	27/64	3/4	9/32	1-15/16	1.043	0.866	1/4	B1-8	TM203	0.48
5/8	BTM202-10		3-3/16	2-1/2	27/64	3/4	9/32	1-15/16	1.043	0.866	1/4	B2-10		
3/4	BTM204-12	52.35	3-9/16	2-13/16	7/16	25/32	11/32	2-1/4	1.126	0.972	5/16	B4-12	TM204	0.60
7/8	BTM205-14	52.90	3-3/4	3	7/16	25/32	11/32	2-1/2	1.200	1.063	5/16	B5-14	TM205	0.70
15/16	BTM205-15		3-3/4	3	7/16	25/32	11/32	2-1/2	1.200	1.063	5/16	B5-15		
1	BTM205-16		3-3/4	3	7/16	25/32	11/32	2-1/2	1.200	1.063	5/16	B5-16		
1-1/16	BTM206-17	72.50	4-7/16	3-9/16	15/32	27/32	13/32	2-15/16	1.319	1.193	3/8	B6-17	TM206	1.00
1-1/8	BTM206-18		4-7/16	3-9/16	15/32	27/32	13/32	2-15/16	1.319	1.193	3/8	B6-18		
1-3/16	BTM206-19		4-7/16	3-9/16	15/32	27/32	13/32	2-15/16	1.319	1.193	3/8	B6-19		
1-1/4	BTM206-20		4-7/16	3-9/16	15/32	27/32	13/32	2-15/16	1.319	1.193	3/8	B6-20		
1-1/4	BTM207-20	79.00	4-13/16	3-15/16	1/2	29/32	13/32	3-3/8	1.418	1.295	3/8	B7-20	TM207	1.30
1-5/16	BTM207-21		4-13/16	3-15/16	1/2	29/32	13/32	3-3/8	1.418	1.295	3/8	B7-21		
1-3/8	BTM207-22		4-13/16	3-15/16	1/2	29/32	13/32	3-3/8	1.418	1.295	3/8	B7-22		
1-7/16	BTM207-23		4-13/16	3-15/16	1/2	29/32	13/32	3-3/8	1.418	1.295	3/8	B7-23		
Shaft Diam. (in.)	AMI Unit #	List Price	Dimensions (in.)								Bolt Size (in.)	Bearing #	Housing #	Weight (lb.)
			a	e	g	x	s	b	Z	L				
1/2	KHTM201-8	53.25	3-3/16	2-1/2	27/64	3/4	9/32	1-15/16	1.282	1-1/8	1/4	KH201-8	TM203	0.48
5/8	KHTM202-10		3-3/16	2-1/2	27/64	3/4	9/32	1-15/16	1.282	1-1/8	1/4	KH202-10		
3/4	KHTM204-12	53.40	3-9/16	2-13/16	7/16	25/32	11/32	2-1/4	1.353	1-7/32	5/16	KH204-12	TM204	0.60
7/8	KHTM205-14	54.80	3-3/4	3	7/16	25/32	11/32	2-1/2	1.357	1-7/32	5/16	KH205-14	TM205	0.70
15/16	KHTM205-15		3-3/4	3	7/16	25/32	11/32	2-1/2	1.357	1-7/32	5/16	KH205-15		
1	KHTM205-16		3-3/4	3	7/16	25/32	11/32	2-1/2	1.357	1-7/32	5/16	KH205-16		
1-1/8	KHTM206-18	75.75	4-7/16	3-9/16	15/32	27/32	13/32	2-15/16	1.493	1-13/32	3/8	KH206-18	TM206	1.00
1-3/16	KHTM206-19		4-7/16	3-9/16	15/32	27/32	13/32	2-15/16	1.493	1-13/32	3/8	KH206-19		
1-1/4	KHTM206-20		4-7/16	3-9/16	15/32	27/32	13/32	2-15/16	1.493	1-13/32	3/8	KH206-20		
1-1/4	KHTM207-20		4-13/16	3-15/16	1/2	29/32	13/32	3-3/8	1.614	1-17/32	3/8	KH207-20	TM207	1.30
1-5/16	KHTM207-21	86.40	4-13/16	3-15/16	1/2	29/32	13/32	3-3/8	1.614	1-17/32	3/8	KH207-21		
1-3/8	KHTM207-22		4-13/16	3-15/16	1/2	29/32	13/32	3-3/8	1.614	1-17/32	3/8	KH207-22		
1-7/16	KHTM207-23		4-13/16	3-15/16	1/2	29/32	13/32	3-3/8	1.614	1-17/32	3/8	KH207-23		

Lubrication fitting tap size 1/4-28 UNF

INTERCHANGES: VF3S-1M LF-SC FB150 FW-U LF



NORMAL DUTY

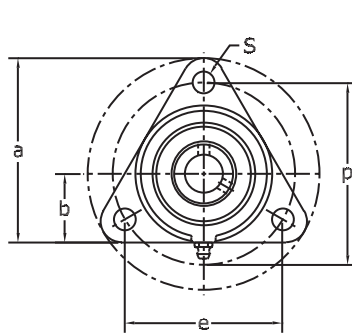

**Set-Screw/Eccentric Locking
Narrow Inner Ring
Cast Iron Housing
Non-Relube
Insert Detail-pg.125,126
Inch and Metric**

BCFTR200 Type KHCFT200 Type

Shaft Diam. (in.)	AMI Unit # Complete with B 200 Type	List Price	AMI Unit # Complete with KH 200 Type	List Price	Dimensions (in.)												Bearing #		Housing	Weight (lb.)
					a	e	p	g	x	s	b	Z		Bi	L	Bolt Size (in.)	B	KH		
												BCFTR	KHCFT							
3/4	BCFTR204-12	96.35	KHCFT204-12	98.00	3-5/8	3.051	3.524	7/16	25/32	29/64	1.378	1-7/64	1-11/32	0.972	1-7/32	7/16	B4-12	KH204-12	CFTR204	1.3
7/8	BCFTR205-14	109.20	KHCFT205-14	112.25	3-13/16	3.272	3.780	15/32	55/64	29/64	1.417	1-17/64	1-27/64	1.063	1-7/32	7/16	B5-14	KH205-14	CFTR205	1.50
15/16	BCFTR205-15		KHCFT205-15	B5-15													KH205-15	1.46		
1	BCFTR205-16		KHCFT205-16	B5-16													KH205-16	1.42		
1-1/16	BCFTR206-17	133.95	---	138.75	4-39/64	3.957	4.567	15/32	15/16	29/64	1.732	1-13/32	1-37/64	1.193	1-13/32	7/16	B6-17	CFTR206	2.40	
1-1/8	BCFTR206-18		KHCFT206-18														B6-18		KH206-18	2.34
1-3/16	BCFTR206-19		KHCFT206-19														B6-19		KH206-19	2.30
1-1/4	BCFTR206-20	148.20	KHCFT206-20	157.70	5-3/64	4.421	5.106	5/8	1-1/16	9/16	1.890	1-37/64	1-49/64	1.295	1-17/32	1/2	B6-20	CFTR207	2.24	
1-1/4	BCFTR207-20		KHCFT207-20														B7-20		KH207-20	3.18
1-5/16	BCFTR207-21		KHCFT207-21														B7-21		KH207-21	3.14
1-3/8	BCFTR207-22	186.50	KHCFT207-22	178.80	5-25/64	4.772	5.512	5/8	1-3/16	9/16	2.008	1-49/64	2	1.398	1-23/32	1/2	B7-22	CFTR208	3.10	
1-7/16	BCFTR207-23		KHCFT207-23														B7-23		KH207-23	3.02
1-1/2	BCFTR208-24		KHCFT208-24														B8-24		KH208-24	3.78
1-5/8	---	214.85	KHCFT209-26	214.85	5-29/32	5.457	6.299	5/8	1-19/64	9/16	2.165		2-3/64		1-23/32	1/2		KH209-26	CFTR209	4.88
1-11/16	---		KHCFT209-27															KH209-27		4.40
1-3/4	---		KHCFT209-28															KH209-28		4.32
1-7/8	---	245.45	KHCFT210-30	245.45	5-29/32	5.457	6.299	5/8	1-19/64	9/16	2.165		2-3/64		1-23/32	1/2		KH210-30	CFTR210	4.42
1-15/16	---		KHCFT210-31															KH210-31		4.30
Shaft Diam. (mm.)	AMI Unit # Complete with B 200 Type	List Price	AMI Unit # Complete with KH 200 Type	List Price	Dimensions (mm)												Bearing #		Housing	Weight (lb.)
					a	e	p	g	x	s	b	Z		Bi	L	Bolt Size (mm)	B	KH		
												BCFTR	KHCFT							
20	BCFTR204	96.35	KHCFT204	98.00	92	77.5	89.5	11	20	11.5	35	28.2	34.0	24.7	31	M10	B4	KH204	CFTR204	1.24
25	BCFTR205	109.20	KHCFT205	112.25	97	83.1	96.0	12	22	11.5	36	32.0	36.0	27	31	M10	B5	KH205	CFTR205	1.44
30	BCFTR206	133.95	KHCFT206	138.75	117	100.5	116.0	12	24	11.5	44	35.6	40.0	30.3	35.7	M10	B6	KH206	CFTR206	2.30
35	BCFTR207	148.20	KHCFT207	157.70	128	112.3	129.7	14	27	14.0	48	40.0	45.0	32.9	38.9	M12	B7	KH207	CFTR207	3.10
40	BCFTR208	186.50	KHCFT208	178.80	137	121.2	140.0	16	30	14.0	51	44.8	51.0	35.5	43.7	M12	B8	KH208	CFTR208	3.70
45			KHCFT209	214.85	150	138.6	160.0	16	33	14.0	55		51.9		43.7	M12		KH209	CFTR209	4.28
50			KHCFT210	245.45	150	138.6	160.0	16	33	14.0	55		51.9		43.7	M12		KH210	CFTR210	4.26

Lubrication fitting tap size 1/4-28 UNF

INTERCHANGES: PCFTR




PRESSED STEEL 3-BOLT FLANGE UNITS


BPF / KHPF 200

NORMAL DUTY


Set-Screw/Eccentric Locking
Narrow Inner Ring
Pressed Steel Housing
Non-Relube
Insert Detail-pg.125,126
Inch and Metric



BPF 200 Type
Set-Screw Locking






KHPF 200 Type
Eccentric Collar Locking



Shaft Diam. (in.)	AMI Unit # Complete with B 200 Type	List Price	AMI Unit # Complete with KH 200 Type	List Price	Dimensions (in.)								Bolt Size (in.)	Bearing #		Housing #	Weight (lb.)
					a	p	t	b	s	F(min)	Bi	L		B	KH		
1/2	BPF1-8	36.75	KHPF201-8	38.15	3-3/16	2-1/2	0.079	9/16	9/32	1-15/16	0.866	1-1/8	1/4	B1-8	KH201-8	PF3	0.50
5/8	BPF2-10		KHPF202-10											B2-10	KH202-10		0.48
3/4	BPF4-12	37.25	KHPF204-12	38.65	3-9/16	2-13/16	0.079	5/8	11/32	2-3/16	0.972	1-7/32	5/16	B4-12	KH204-12	PF4	0.64
7/8	BPF5-14		KHPF205-14											B5-14	KH205-14		
15/16	BPF5-15	38.00	KHPF205-15	38.90	3-3/4	3	0.079	11/16	11/32	2-3/8	1.063	1-7/32	5/16	B5-15	KH205-15	PF5	0.86
1	BPF5-16		KHPF205-16											B5-16	KH205-16		
1-1/16	BPF6-17		—											B6-17	—		
1-1/8	BPF6-18	49.00	KHPF206-18	52.25	4-7/16	3-9/16	0.102	11/16	13/32	2-13/16	1.193	1-13/32	3/8	B6-18	KH206-18	PF6	1.32
1-3/16	BPF6-19		KHPF206-19											B6-19	KH206-19		
1-1/4	BPF6-20		KHPF206-20											B6-20	KH206-20		
1-1/4	BPF7-20		KHPF207-20											B7-20	KH207-20		
1-5/16	BPF7-21	61.45	KHPF207-21	68.85	4-13/16	3-15/16	0.102	3/4	13/32	3-3/16	1.295	1-17/32	3/8	B7-21	KH207-21	PF7	1.80
1-3/8	BPF7-22		KHPF207-22											B7-22	KH207-22		
1-7/16	BPF7-23		KHPF207-23											B7-23	KH207-23		
Dimensions (mm)																	
12	BPF1		KHPF201											B1	KH201		
15	BPF2	36.75	KHPF202	38.15	81	63.5	2	14	7	49	22	28.6	M6	B2	KH202	PF3	0.48
17	BPF3		KHPF203											B3	KH203		0.64
20	BPF4	37.25	KHPF204	38.65	90	71.5	2	16	9	56	24.7	31	M8	B4	KH204	PF4	0.64
25	BPF5	38.00	KHPF205	39.90	95	76	2	18	9	60	27	31	M8	B5	KH205	PF5	0.86
30	BPF6	49.00	KHPF206	52.25	113	90.5	2.6	18	11	71	30.3	35.7	M10	B6	KH206	PF6	1.32
35	BPF7	61.45	KHPF207	68.85	120	100	2.6	19	11	81	32.9	38.9	M10	B7	KH207	PF7	1.80

INTERCHANGES: SSF3S F3B-SL FPS3-25 ASPF RAY SSF SSF3E F3B-SLX RA F-FM AELP SSF-E

KHPFT 200 Type
Eccentric Collar LockingBPFT 200 Type
Set-Screw Locking

Set-Screw/Eccentric Locking
Narrow Inner Ring
Pressed Steel Housing
Non-Relube
Insert Detail-pg.125,126
Inch and Metric

Shaft Diam. (in.)	AMI Unit # Complete with B 200 Type	List Price	AMI Unit # Complete with KH 200 Type	List Price	Dimensions (in.)									Bolt Size (in.)	Bearing #		Housing #	Weight (lb.)
					a	p	t	b	s	F(min)	M	Bi	L		B	KH		
1/2	BPFT1-8	36.75	KHPFT201-8	38.15	2-23/32	2-1/2	0.079	9/16	9/32	1-15/16	1-1/8	0.866	1-1/8	1/4	B1-8	KH201-8	PFT3	0.49
5/8	BPFT2-10		KHPFT202-10												B2-10	KH202-10		
3/4	BPFT4-12	37.25	KHPFT204-12	38.65	3	2-13/16	0.079	5/8	11/32	2-3/16	1-5/16	0.972	1-7/32	5/16	B4-12	KH204-12	PFT4	0.54
7/8	BPFT5-14		KHPFT205-14												B5-14	KH205-14		
15/16	BPFT5-15	38.00	KHPFT205-15	39.90	3-1/8	3	0.079	11/16	11/32	2-3/8	1-3/8	1.063	1-7/32	5/16	B5-15	KH205-15	PFT5	0.84
1	BPFT5-16		KHPFT205-16												B5-16	KH205-16		
1-1/16	BPFT6-17														B6-17			
1-1/8	BPFT6-18	49.00	KHPFT206-18	52.25	3-11/16	3-9/16	0.102	5/8	13/32	2-13/16	1-1/2	1.193	1-13/32	3/8	B6-18	KH206-18	PFT6	1.18
1-3/16	BPFT6-19		KHPFT206-19												B6-19	KH206-19		
1-1/4	BPFT6-20		KHPFT206-20												B6-20	KH206-20		
1-1/4	BPFT7-20		KHPFT207-20												B7-20	KH207-20		
1-5/16	BPFT7-21	61.45	KHPFT207-21	68.85	4-5/32	3-15/16	0.102	3/4	13/32	3-3/16	1-3/4	1.295	1-17/32	3/8	B7-21	KH207-21	PFT7	1.69
1-3/8	BPFT7-22		KHPFT207-22												B7-22	KH207-22		
1-7/16	BPFT7-23		KHPFT207-23												B7-23	KH207-23		
Dimensions (mm)																		
12	BPFT1		KHPFT201	38.15	69.1	63.5	2	14.0	7	49	29	22	28.6	M6	B1	KH201	PFT3	0.49
15	BPFT2	36.75	KHPFT202												B2	KH202		0.49
17	BPFT3		KHPFT203												B3	KH203		0.54
20	BPFT4	37.25	KHPFT204	38.65	76.2	71.5	2	16.0	9	56	33	24.7	31	M8	B4	KH204	PFT4	0.54
25	BPFT5	38.00	KHPFT205	39.90	79.4	76	2	18.0	9	60	35	27	31	M8	B5	KH205	PFT5	0.84
30	BPFT6	49.00	KHPFT206	52.25	93.7	90.5	2.6	16.0	11	71	38	30.3	35.7	M10	B6	KH206	PFT6	1.18
35	BPFT7	61.45	KHPFT207	68.85	105.6	100	2.6	19.1	11	81	45	32.9	38.9	M10	B7	KH207	PFT7	1.69

INTERCHANGES: SSF3TS TFPS-25 TSSF SSF3TE RATR 52MSTR TSSF-E




FOUR-BOLT FLANGE UNITS

UCLF / UCF 200

NORMAL DUTY


Set-Screw Locking
Wide Inner Ring
Cast Iron Housing
Insert Detail-pg.121-122
Covers Available-pg.60
Inch and Metric

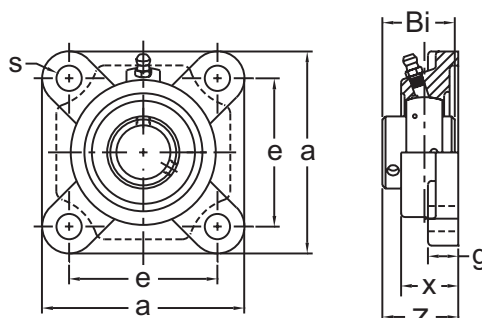

Shaft Diam. (in.)	AMI Unit #	List Price	Dimensions (in.)							Bolt Size (in.)	Bearing #	Housing #	Weight (lb.)
			a	e	g	x	s	Z	Bi				
1/2	UCLF201-8	44.50	3	2-1/8	3/8	1-3/32	13/32	1.287	1.024	3/8	UCW201-8	LF3	1.15
9/16	UCLF202-9										UCW202-9		1.12
5/8	UCLF202-10										UCW202-10		1.12
11/16	UCLF203-11	44.50	3	2-1/8	3/8	1-3/32	13/32	1.287	1.024	3/8	UCW203-11	LF3	1.10
1/2	UCF201-8	44.50	3-3/8	2-1/2	15/32	1	7/16	1.311	1.220	3/8	UC201-8	F204	1.41
5/8	UCF202-10										UC202-10		1.37
11/16	UCF203-11										UC203-11		1.34
3/4	UCF204-12										UC204-12		1.30
7/8	UCF205-14	49.00	3-3/4	2-3/4	9/16	1-1/16	15/32	1.406	1.339	7/16	UC205-14	F205	1.81
15/16	UCF205-15	49.00									UC205-15		
1	UCF205-16	46.65									UC205-16		
1-1/16	UCF206-17	64.95	4-1/4	3-1/4	9/16	1-7/32	15/32	1.583	1.500	7/16	UC206-17	F206	2.42
1-1/8	UCF206-18										UC206-18		
1-3/16	UCF206-19										UC206-19		
1-1/4	UCF206-20										UC206-20		
1-1/4	UCF207-20	75.45	4-5/8	3-5/8	5/8	1-11/32	17/32	1.748	1.689	1/2	UC207-20	F207	3.31
1-5/16	UCF207-21										UC207-21		
1-3/8	UCF207-22										UC207-22		
1-7/16	UCF207-23										UC207-23		
1-1/2	UCF208-24	89.40	5-1/8	4	5/8	1-13/32	17/32	2.016	1.937	1/2	UC208-24	F208	4.41
1-9/16	UCF208-25										UC208-25		
1-5/8	UCF209-26	99.60	5-3/8	4-1/8	23/32	1-1/2	19/32	2.055	1.937	9/16	UC209-26	F209	5.29
1-11/16	UCF209-27										UC209-27		
1-3/4	UCF209-28										UC209-28		
1-7/8	UCF210-30	118.35	5-5/8	4-3/8	23/32	1-9/16	19/32	2.150	2.031	9/16	UC210-30	F210	5.51
1-15/16	UCF210-31										UC210-31		
2	UCF210-32										UC210-32		
2	UCF211-32	146.85	6-3/8	5-1/8	25/32	1-11/16	21/32	2.299	2.189	5/8	UC211-32	F211	7.49
2-1/8	UCF211-34										UC211-34		
2-3/16	UCF211-35										UC211-35		
2-1/4	UCF212-36	189.85	6-7/8	5-5/8	25/32	1-7/8	21/32	2.705	2.563	5/8	UC212-36	F212	10.14
2-3/8	UCF212-38										UC212-38		
2-7/16	UCF212-39										UC212-39		
2-1/2	UCF213-40	244.60	7-3/8	5-7/8	25/32	1-31/32	21/32	2.744	2.563	5/8	UC213-40	F213	12.12
2-11/16	UCF214-43	294.40	7-3/8	5-7/8	13/16	2-5/16	21/32	3.087	2.937	5/8	UC214-43	FX13	13.44
2-3/4	UCF214-44										UC214-44		
2-15/16	UCF215-47	399.10	7-3/4	6	15/16	2-3/8	25/32	3.209	3.063	3/4	UC215-47	FX14	15.21
3	UCF215-48										UC215-48		
3-1/4	UCF217-52	595.50	8-11/16	6-7/8	1-1/32	2-15/32	29/32	3.449	3.374	7/8	UC217-52	F217	20.50
3-7/16	UCF217-55										UC217-55		
3-1/2	UCF218-56	717.10	9-1/4	7-3/8	1-1/32	2-11/16	29/32	3.791	3.780	7/8	UC218-56	F218	24.91
Dimensions (mm)													
12	UCLF201	44.50	76	54	9.5	28	10.5	32.7	26	M8	UCW201	LF3	1.15
15	UCLF202										UCW202		1.12
17	UCLF203										UCW203		1.10
12	UCF201	44.50	86	64	12	25.4	11	33.3	31	M10	UC201	F204	1.43
15	UCF202										UC202		1.38
17	UCF203										UC203		1.36
20	UCF204	44.50	86	64	12	25.4	11	33.3	31	M10	UC204	F204	1.32
25	UCF205	49.00	95	70	14	27	12	35.7	34		UC205	F205	1.83
30	UCF206	64.95	108	83	14	31	12	40.2	38.1		UC206	F206	2.45
35	UCF207	75.45	117	92	16	34	13.5	44.4	42.9	M12	UC207	F207	3.35
40	UCF208	89.40	130	102	16	36	13.5	51.2	49.2	M12	UC208	F208	4.46
45	UCF209	99.60	137	105	18	38	15	52.2	49.2	M14	UC209	F209	5.35
50	UCF210	118.35	143	111	18	40	15	54.6	51.6	M14	UC210	F210	5.58
55	UCF211	146.85	162	130	20	43	17	58.4	55.6		UC211	F211	7.58
60	UCF212	189.85	175	143	20	48	17	68.7	65.1		UC212	F212	10.3
65	UCF213	244.60	187	149	20	50	17	69.7	65.1	M16	UC213	F213	12.3
70	UCF214	294.40	193	152	24	54	19	75.4	74.6		UC214	F214	13.6
75	UCF215	399.10	200	159	24	56	19	78.5	77.8		UC215	F215	15.4
80	UCF216	552.10	208	165	24	58	23	83.3	82.6	M20	UC216	F216	17.4
85	UCF217	595.50	220	175	26	63	23	87.6	85.7		UC217	F217	20.8
90	UCF218	717.10	235	187	26	68	23	96.3	96		UC218	F218	25.2

Lubrication fitting tap size for 1" and smaller shaft sizes, 1/4-28 UNF; for all other sizes, 1/8-27 NPT

INTERCHANGES:	VF4S	F4B-SC	YCJ	F3U-N	FC4-25	FY-TF	UCF	SF
---------------	------	--------	-----	-------	--------	-------	-----	----

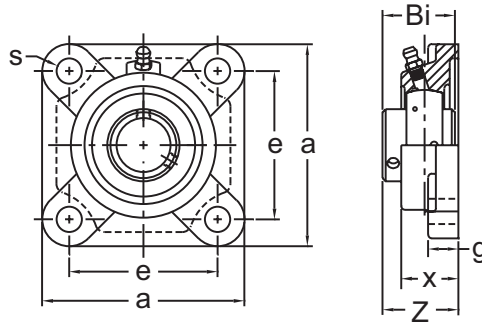

Eccentric Locking
Narrow Inner Ring
Cast Iron Housing
Insert Detail-pg.121-122
Covers Available-pg.60
Inch and Metric

Shaft Diam. (in.)	AMI Unit #	List Price	Dimensions (in.)							Bolt Size (in.)	Bearing #	Housing #	Weight (lb.)
			a	e	g	x	s	Z	L				
1/2	KHLF201-8	43.20	3	2-1/8	3/8	1-3/32	13/32	1.528	1-1/8	3/8	KH201-8 KH202-10	LF3	1.15
5/8	KHLF202-10												1.12
3/4	KHF204-12	43.20	3-3/8	2-1/2	15/32	1	7/16	1.516	1-7/32	3/8	KH204-12	F204	1.30
7/8	KHF205-14	47.10	3-3/4	2-3/4	9/16	1-1/16	15/32	1.555	1-7/32	7/16	KH205-14 KH205-15 KH205-16	F205	1.83
15/16	KHF205-16												
1-1/8	KHF206-18	66.45	4-1/4	3-1/4	9/16	1-7/32	15/32	1.760	1-13/32	7/16	KH206-18 KH206-19 KH206-20	F206	2.42
1-3/16	KHF206-19												
1-1/4	KHF206-20	80.00	4-5/8	3-5/8	5/8	1-11/32	17/32	1.906	1-17/32	1/2	KH207-20 KH207-21 KH207-22 KH207-23	F207	3.33
1-1/4	KHF207-20												
1-5/16	KHF207-21												
1-3/8	KHF207-22												
1-7/16	KHF207-23	91.20	5-1/8	4	5/8	1-13/32	17/32	2.114	1-23/32	1/2	KH208-24	F208	4.41
1-1/2	KHF208-24												
1-5/8	KHF209-26	103.65	5-3/8	4-1/8	23/32	1-1/2	19/32	2.154	1-23/32	9/16	KH209-26 KH209-27 KH209-28	F209	5.24
1-11/16	KHF209-27												
1-3/4	KHF209-28	119.40	5-5/8	4-3/8	23/32	1-9/16	19/32	2.154	1-23/32	9/16	KH210-30 KH210-31	F210	5.44
1-7/8	KHF210-30												
1-15/16	KHF210-31	160.10	6-3/8	5-1/8	25/32	1-11/16	21/32	2.429	1-29/32	5/8	KH211-32 KH211-34 KH211-35	F211	7.29
2	KHF211-32												
2-1/8	KHF211-34												
2-3/16	KHF211-35												
Dimensions (mm)													
12	KHLF201	43.20	76.2	54.0	9.5	27.8	10.3	38.8	28.6	M8	KH201 KH202 KH203	LF3	1.16
15	KHLF202												1.12
17	KHLF203												1.10
20	KHF204	43.20	86	64	12	25.4	11	38.5	31	M10	KH204	F204	1.30
25	KHF205	47.10	95	70	14	27	12	39.5	31		KH205	F205	1.83
30	KHF206	66.45	108	83	14	31	12	44.7	35.7		KH206	F206	2.42
35	KHF207	80.00	117	92	16	34	13.5	48.4	38.9	M12	KH207	F207	3.33
40	KHF208	91.20	130	102	16	36	13.5	53.7	43.7	M12	KH208	F208	4.41
45	KHF209	103.65	137	105	18	38	15	54.7	43.7	M14	KH209	F209	5.24
50	KHF210	119.40	143	111	18	40	15	54.7	43.7	M14	KH210	F210	5.44
55	KHF211	160.10	162	130	20	43	17	61.7	48.7	M16	KH211	F211	7.29

Lubrication fitting tap size for 1" and smaller shaft sizes, 1/4-28 UNF; for all other sizes, 1/8-27 NPT

INTERCHANGES: VF4E-1 F4B-SXV VCJ F3W-U FY-FM AELF VF-E FB220





FOUR-BOLT FLANGE UNITS

UGSLF 200

NORMAL DUTY

**Eccentric Locking
Wide Inner Ring
Cast Iron Housing
Insert Detail-pg.1124
Inch and Metric**





Fafnir® Style

Shaft Diam. (in.)	AMI Unit #	List Price	Dimensions (in.)							Bolt Size (in.)	Bearing #	Housing #	Weight (lb.)
			a	e	g	x	s	Z	L				
1/2	UGSLF201-8	54.80	3	2-1/8	3/8	1-3/32	29/64	1-37/64	1-15/32	3/8	UGW201-8	SLF203	1.21
5/8	UGSLF202-10	54.80	3-3/8	2-1/2	3/8	1-5/16	29/64	1-55/64	1-23/32	3/8	UGW202-10	SLF204	1.51
3/4	UGSLF204-12										UGW204-12		
7/8	UGSLF205-14	62.60	3-3/4	2-3/4	7/16	1-3/8	29/64	1-57/64	1-3/4	7/16	UG205-14	SLF205	1.98
15/16	UGSLF205-15										UG205-15		
1	UGSLF205-16										UG205-16		
1-1/8	UGSLF206-18	77.90	4-1/4	3-1/4	1/2	1-15/32	29/64	2-5/64	1-29/32	7/16	UG206-18	SLF206	2.87
1-3/16	UGSLF206-19										UG206-19		
1-1/4	UGSLF206-20										UG206-20		
1-1/4	UGSLF207-20	95.20	4-5/8	3-5/8	1/2	1-1/2	35/64	2-5/32	2-1/64	1/2	UG207-20	SLF207	3.75
1-5/16	UGSLF207-21										UG207-21		
1-3/8	UGSLF207-22										UG207-22		
1-7/16	UGSLF207-23										UG207-23		
1-1/2	UGSLF208-24	107.90	5-1/8	4	5/8	1-5/8	35/64	2-11/32	2-7/32	1/2	UG208-24	SLF208	4.96
1-9/16	*UGSLF208-25										UG208-25		
1-5/8	UGSLF209-26	116.80	5-3/8	4-1/8	5/8	1-21/32	35/64	2-11/32	2-7/32	1/2	UG209-26	SLF209	5.51
1-11/16	UGSLF209-27										UG209-27		
1-3/4	UGSLF209-28										UG209-28		
1-7/8	UGSLF210-30	150.60	5-5/8	4-3/8	5/8	1-13/16	45/64	2-19/32	2-15/32	5/8	UG210-30	SLF210	6.28
1-15/16	UGSLF210-31										UG210-31		
2	UGSLF210-32										UG210-32		
2	UGSLF211-32	197.00	6-3/8	5-1/8	11/16	1-31/32	45/64	2-15/16	2-13/16	5/8	UG211-32	SLF211	8.93
2-1/8	UGSLF211-34										UG211-34		
2-3/16	UGSLF211-35										UG211-35		
2-1/4	UGSLF212-36	244.20	6-7/8	5-5/8	11/16	2-5/32	45/64	3-3/16	3-1/16	5/8	UG212-36	SLF212	11.25
2-3/8	UGSLF212-38										UG212-38		
2-7/16	UGSLF212-39										UG212-39		
Dimensions (mm)													
20	UGSLF204	54.80	86	63.5	9.5	33	11.5	47.3	43.7	M10	UG204	SLF204	1.51
25	UGSLF205	62.60	95	70	11	35	11.5	48.0	44.4		UG205	SLF205	1.98
30	UGSLF206	77.90	108	82.5	13	37	11.5	52.8	48.4		UG206	SLF206	2.87
35	UGSLF207	95.20	117	92	13	38	14	54.8	51.1	M12	UG207	SLF207	3.75
40	UGSLF208	107.90	130	101.5	16	41	14	59.5	56.3		UG208	SLF208	4.96
45	UGSLF209	116.80	137	105	16	42	14	59.5	56.3		UG209	SLF209	5.51
50	UGSLF210	150.60	143	111	16	46	18	65.9	62.7	M16	UG210	SLF210	6.28
55	UGSLF211	197.00	162	130	18	50	18	74.6	71.4		UG211	SLF211	8.93
60	UGSLF212	244.20	175	143	18	55	18	81.0	77.8		UG212	SLF212	11.25

*Consult factory for availability

Lubrication fitting tap size for 1" and smaller shaft sizes, 1/4-28 UNF; for all other sizes, 1/8-27 NPT

INTERCHANGES: VF4E-2 F4B-SXR RCJ NANF FB220W F3Y-N FY-WF UELF RF-E



Tapered Adapter Sleeve
Wide Inner Ring
Cast Iron Housing
Insert Detail-pg.128
Inch and Metric

Shaft Diam. (in.)	AMI Unit #	List Price	Dimensions (in.)							Bolt Size (in.)	Bearing #	Housing #	Weight (lb.)
			a	e	g	x	s	Z	L				
3/4	UKF205+HE2305	87.10	3-3/4	2-3/4	9/16	1-1/16	15/32	1.398	1.378	7/16	UK205+HE2305	F205	1.94
13/16	UKF205+HA2305										UK205+HA2305		
7/8	UKF206+HS2306	106.50	4-1/4	3-1/4	9/16	1-7/32	15/32	1.535	1.496	7/16	UK206+HS2306	F206	2.68
15/16	UKF206+HA2306										UK206+HA2306		
1	UKF206+HE2306										UK206+HE2306		
1-1/8	UKF207+HS2307	121.70	4-5/8	3-5/8	5/8	1-11/32	17/32	1.634	1.693	1/2	UK207+HS2307	F207	3.35
1-3/16	UKF207+HA2307										UK207+HA2307		
1-1/4	UKF208+HE2308	141.60	5-1/8	4	5/8	1-13/32	17/32	1.792	1.811	1/2	UK208+HE2308	F208	4.68
1-5/16	UKF208+HA2308										UK208+HA2308		
1-3/8	UKF208+HS2308										UK208+HS2308		
1-7/16	UKF209+HA2309	152.40	5-3/8	4-1/8	23/32	1-1/2	19/32	1.890	1.969	9/16	UK209+HA2309	F209	5.58
1-1/2	UKF209+HE2309										UK209+HE2309		
1-5/8	UKF209+HS2309										UK209+HS2309		
1-11/16	UKF210+HA2310	176.90	5-5/8	4-3/8	23/32	1-9/16	19/32	1.949	2.165	9/16	UK210+HA2310	F210	6.02
1-3/4	UKF210+HE2310										UK210+HE2310		
1-7/8	UKF211+HS2311	234.50	6-3/8	5-1/8	25/32	1-11/16	21/32	2.106	2.323	5/8	UK211+HS2311	F211	8.03
1-15/16	UKF211+HA2311										UK211+HA2311		
2	UKF211+HE2311										UK211+HE2311		
2-1/16	UKF212+HA2312	290.00	6-7/8	5-5/8	25/32	1-7/8	21/32	2.362	2.441	5/8	UK212+HA2312	F212	10.3
2-1/8	UKF212+HS2312										UK212+HS2312		
2-3/16	UKF213+HA2313	317.50	7-3/8	5-7/8	25/32	1-1/32	21/32	2.480	2.559	5/8	UK213+HA2313	F213	12.7
2-1/4	UKF213+HE2313										UK213+HE2313		
2-3/8	UKF213+HS2313										UK213+HS2313		
2-7/16	UKF215+HA2315	513.50	7-7/8	6-1/4	15/16	2-7/32	3/4	2.736	2.874	11/16	UK215+HA2315	F215	16.3
2-1/2	UKF215+HE2315										UK215+HE2315		
2-3/4	UKF216+HE2316	522.80	8-3/16	6-1/2	15/16	2-9/32	29/32	2.874	3.071	7/8	UK216+HE2316	F216	18.3
2-15/16	UKF217+HA2317	629.40	8-11/16	6-7/8	1-1/32	2-15/32	29/32	3.032	3.228	7/8	UK217+HA2317	F217	21.9
3	UKF217+HE2317										UK217+HE2317		
3-1/8	UKF218+HS2318	774.80	9-1/4	7-3/8	1-1/32	2-11/16	29/32	3.248	3.386	7/8	UK218+HS2318	F218	26.1
Dimensions (mm)													
20	UKF205+H2305	87.10	95	70	14	27	12	35.5	35	M10	UK205+H2305	F205	1.94
25	UKF206+H2306	106.50	108	83	14	31	12	39	38	M10	UK206+H2306	F206	2.68
30	UKF207+H2307	121.70	117	92	16	34	13.5	41.5	43	M12	UK207+H2307	F207	3.35
35	UKF208+H2308	141.60	130	102	16	36	13.5	45.5	46	M12	UK208+H2308	F208	4.68
40	UKF209+H2309	152.40	137	105	18	38	15	48	50	M14	UK209+H2309	F209	5.58
45	UKF210+H2310	176.90	143	111	18	40	15	49.5	55	M14	UK210+H2310	F210	6.02
50	UKF211+H2311	234.50	162	130	20	43	17	53.5	59		UK211+H2311	F211	8.03
55	UKF212+H2312	290.00	175	143	20	48	17	60	62	M16	UK212+H2312	F212	10.3
60	UKF213+H2313	317.50	187	149	20	50	17	63	65		UK213+H2313	F213	12.7
65	UKF215+H2315	513.50	200	159	24	56	19	69.5	73	M16	UK215+H2315	F215	16.3
70	UKF216+H2316	522.80	208	165	24	58	23	73	78	M20	UK216+H2316	F216	18.3
75	UKF217+H2317	629.40	220	175	26	63	23	77	82	M20	UK217+H2317	F217	21.9
80	UKF218+H2318	774.80	235	187	26	68	23	82.5	86	M20	UK218+H2318	F218	26.1

Lubrication fitting tap size for 1" and smaller shaft sizes, 1/4-28 UNF; for all other sizes, 1/8-27 NPT



INTERCHANGES: UKF



FOUR-BOLT FLANGE UNITS

UGGFDR 200

Eccentric Locking
Wide Inner Ring
Malleable Cast Housing
Insert Detail-pg.124
Inch and Metric





NORMAL DUTY

Shaft Diam. (mm)	AMI Unit #	List Price	Dimensions (in.)									Bolt Size (mm)	Bearing #	Housing #	Weight (lb.)
			a	e	g	x	s	b	f	Z	L				
1-1/2 1-9/16	UGGFDR208-24 *UGGFDR208-25	145.00	5-25/32	4-11/16	5/8	1-7/64	0.512	3-55/64	3-17/32	1.378	2-7/32	1/2	UG208-24 UG208-25	GFDR208	3.04
1-5/8 1-11/16 1-3/4	UGGFDR209-26 UGGFDR209-27 UGGFDR209-28	157.10	5-7/8	4-3/4	5/8	1-7/64	0.512	4-7/32	3-25/32	1.378	2-7/32	1/2	UG209-26 UG209-27 UG209-28	GFDR209	3.22
35 40 45	UGGFDR210-30 UGGFDR210-31 UGGFDR210-32	191.00	6-7/64	5	5/8	1-7/64	0.512	4-29/64	3-31/32	1.496	2-15/32	1/2	UG210-30 UG210-31 UG210-32	GFDR210	3.68
Dimensions (mm)															
40	UGGFDR208	145.00	147	119	16	28	13	98	89.7	35	56.3	M12	UG208	GFDR208	3.04
45	UGGFDR209	157.10	149	120.5	16	28	13	107	96	35	56.3		UG209	GFDR209	3.22
50	UGGFDR210	191.00	155	127	16	28	13	113	100.8	35	62.7		UG210	GFDR210	3.68

*Consult factory for availability
Lubrication fitting tap size 1/4-28 UNF

INTERCHANGES: GRFD GRFDR



Set-Screw Locking
Wide Inner Ring
Cast Iron Housing
Insert Detail-pg.122
Covers available-pg.60
Metric

Shaft Diam. (mm)	AMI Unit #	List Price	Dimensions (mm)										Bolt Size (mm)	Bearing #	Housing #	Weight (lb.)
			a	p	e	s	J	K	g	f	Z	Bi				
12	UCFC201	65.65	100	78	55.1	12	5	7	20.5	62	28.3	31.0	M10	UC201	FC204	1.98
15	UCFC202													UC202		1.94
17	UCFC203													UC203		1.92
20	UCFC204	65.65	100	78	55.1	12	5	7	20.5	62	28.3	31.0	M10	UC204	FC204	1.87
25	UCFC205	71.00	115	90	63.6	12	6	7	21	70	29.7	34.0		UC205	FC205	2.45
30	UCFC206	92.60	125	100	70.7	12	8	8	23	80	32.2	38.1		UC206	FC206	3.35
35	UCFC207	109.50	135	110	77.8	14	8	9	26	90	36.4	42.9	M12	UC207	FC207	3.79
40	UCFC208	131.25	145	120	84.8	14	10	9	26	100	41.2	49.2	M12	UC208	FC208	4.68
45	UCFC209	145.70	160	132	93.3	16	12	14	26	105	40.2	49.2	M14	UC209	FC209	6.69
50	UCFC210	171.50	165	138	97.6	16	12	14	28	110	42.6	51.6	M14	UC210	FC210	6.91
55	UCFC211	221.60	185	150	106.1	19	12	15	31	125	46.4	55.6	M16	UC211	FC211	8.7
60	UCFC212	297.65	195	160	113.1	19	12	15	36	135	56.7	65.1	M16	UC212	FC212	9.81
65	UCFC213	384.25	205	170	120.2	19	14	15	36	145	55.7	65.1	M16	UC213	FC213	11.8
70	UCFC214	461.40	215	177	125.1	19	14	18	40	150	61.4	74.6		UC214	FC214	15.2
75	UCFC215	511.25	220	184	130.1	19	16	18	40	160	62.5	77.8		UC215	FC215	16.5
80	UCFC216	608.70	240	200	141.4	23	16	18	42	170	67.3	82.6	M20	UC216	FC216	20.5
85	UCFC217	705.50	250	208	147.1	23	18	20	45	180	69.6	85.7		UC217	FC217	23.7
90	UCFC218	892.55	265	220	155.5	23	18	20	50	190	78.3	96.0		UC218	FC218	28.3

Lubrication fitting tap size for 25mm and smaller shaft sizes, 1/4-28 UNF; for all other sizes, 1/8-27 NPT

INTERCHANGES: UCFC





PILOTED FLANGE CARTRIDGE UNITS

UCFCS 200

NORMAL DUTY

Set-Screw Locking
Wide Inner Ring
Cast Iron Housing
Insert Detail-pg.121-122
Inch and Metric



SealMaster® Style

Shaft Diam. (in.)	AMI Unit #	List Price	Dimensions (in.)										Bolt Size (in.)	Bearing #	Housing #	Weight (lb.)
			a	p	e	s	J	k	g	f	Z	Bi				
1-1/16	UCFCS206-17	92.60	4-3/8	3-5/8	2.559	3/8	1/4	23/64	15/16	3.000	1.268	1.500	5/16	UC206-17	FCSX05	2.28
1-1/8	UCFCS206-18													UC206-18		
1-3/16	UCFCS206-19													UC206-19		
1-1/4	UCFCS206-20													UC206-20		
1-1/4	UCFCS207-20	109.50	5	4-1/8	2.921	15/32	3/8	25/64	7/8	3.375	1.315	1.689	3/8	UC207-20	FCSX06	3.14
1-5/16	UCFCS207-21													UC207-21		
1-3/8	UCFCS207-22													UC207-22		
1-7/16	UCFCS207-23													UC207-23		
1-1/2	UCFCS208-24	131.25	5-1/4	4-3/8	3.091	15/32	7/16	7/16	1-1/32	3.625	1.543	1.937	7/16	UC208-24	FCSX07	3.71
1-9/16	UCFCS208-25													UC208-25		
1-5/8	UCFCS209-26	145.70	6-1/8	5-1/8	3.625	17/32	15/32	25/64	7/8	4.250	1.408	1.937	1/2	UC209-26	FCF209	3.82
1-11/16	UCFCS209-27													UC209-27		
1-3/4	UCFCS209-28													UC209-28		
1-7/8	UCFCS210-30													UC210-30		
1-15/16	UCFCS210-31	171.50	6-1/8	5-1/8	3.618	35/64	15/32	7/16	1	4.250	1.598	2.031	1/2	UC210-31	FCSX09	5.20
2	UCFCS210-32													UC210-32		
2	UCFCS211-32	221.60	6-3/8	5-3/8	3.800	35/64	5/8	7/16	1	4.500	1.591	2.189	1/2	UC211-32	FCSX10	5.99
2-1/8	UCFCS211-34													UC211-34		
2-3/16	UCFCS211-35													UC211-35		
2-1/4	UCFCS212-36													UC212-36		
2-3/8	UCFCS212-38	297.65	7-1/8	6	4.232	5/8	7/8	1/2	1-1/32	5.000	1.720	2.563	1/2	UC212-38	FCSX11	8.23
2-7/16	UCFCS212-39													UC212-39		
2-1/2	UCFCS213-40	384.20	7-5/8	6-1/2	4.594	5/8	25/32	9/16	1-5/16	5.500	1.996	2.563	1/2	UC213-40	FCSX12	9.57
2-11/16	UCFCS214-43	417.55	7-5/8	6-1/2	4.594	5/8	25/32	9/16	1-5/16	5.500	2.181	2.937	1/2	UC214-43	FCSX13	11.36
2-3/4	UCFCS214-44													UC214-44		
2-15/16	UCFCS215-47	578.50	8-3/4	7-1/2	5.303	3/4	25/32	9/16	1-13/32	6.375	2.303	3.063	5/8	UC215-47	FCSX14	12.40
3	UCFCS215-48													UC215-48		
Dimensions (mm)																
30	UCFCS206	92.60	111	92	65	9.5	6.4	9	24	76.2	32.2	38.1	M8	UC206	FCSX05	2.28
35	UCFCS207	109.50	127	105	74.2	12	9.5	10	22	85.7	33.4	42.9	M10	UC207	FCSX06	3.14
40	UCFCS208	131.25	133	111	78.5	12	11	11	26	92.1	39.2	49.2	M10	UC208	FCSX07	3.71
45	UCFCS209	145.70	155	130	92.1	13.5	12	11	22	108.0	35.8	49.2	M12	UC209	FCF209	3.82
50	UCFCS210	171.50	155	130	91.9	14	12	11	25	108.0	40.6	51.6		UC210	FCSX09	5.20
55	UCFCS211	221.60	162	136.5	96.5	14	15.9	11	25	114.3	40.4	55.6		UC211	FCSX10	5.99
60	UCFCS212	297.65	181	152	107.5	16	22.2	13	26	127.0	43.7	65.1	M14	UC212	FCSX11	8.23
65	UCFCS213	384.25	194	165	116.7	16	19.8	14	33	139.7	50.7	65.1		UC213	FCSX12	9.57
70	UCFCS214	417.55	194	165	116.7	16	19.8	14	33	139.7	55.4	74.6		UC214	FCSX13	11.36
75	UCFCS215	578.50	222	190.5	134.7	19	19.8	14	36	161.9	58.5	77.8	M16	UC215	FCSX14	11.38

Lubrication fitting tap size for 1" and smaller shaft sizes, 1/4-28 UNF; for all other sizes, 1/8-27 NPT

INTERCHANGES: VFCS FC-SC PFC4-25 SFC

UCFCF 200



PILOTED FLANGE CARTRIDGE UNITS



NORMAL DUTY



Fafnir® Style



Set-Screw Locking
Eccentric Locking Available
Wide Inner Ring
Cast Iron Housing
Insert Detail-pg.121-122
Inch and Metric

Shaft Diam. (in.)	AMI Unit #	List Price	Dimensions (in.)										Bolt Size (in.)	Bearing #	Housing #	Weight (lb.)
			a	p	e	s	J	k	g	f	Z	Bi				
7/8 15/16 1	UCFCF205-14 UCFCF205-15 UCFCF205-16	71.00	4-3/8	3-5/8	2.563	13/32	1/4	25/64	55/64	3.000	1.219	1.339	3/8	UC205-14 UC205-15 UC205-16	FCF205	2.68
1-1/16 1-1/8 1-3/16 1-1/4	UCFCF206-17 UCFCF206-18 UCFCF206-19 UCFCF206-20	92.60	5	4-1/8	2.917	15/32	27/64	25/64	25/32	3.375	1.172	1.500	7/16	UC206-17 UC206-18 UC206-19 UC206-20	FCF206	3.90
1-1/4 1-5/16 1-3/8 1-7/16	UCFCF207-20 UCFCF207-21 UCFCF207-22 UCFCF207-23	109.50	5-1/4	4-3/8	3.094	15/32	15/32	15/32	7/8	3.625	1.281	1.689	7/16	UC207-20 UC207-21 UC207-22 UC207-23	FCF207	4.20
1-1/2 1-9/16	UCFCF208-24 UCFCF208-25	131.25	5-1/4	4-3/8	3.094	15/32	15/32	15/32	1-1/32	3.625	1.563	1.937	7/16	UC208-24 UC208-25	FCF208	4.60
1-5/8 1-11/16 1-3/4	UCFCF209-26 UCFCF209-27 UCFCF209-28	145.70	6-1/8	5-1/8	3.625	17/32	15/32	7/16	7/8	4.250	1.406	1.937	1/2	UC209-26 UC209-27 UC209-28	FCF209	6.20
1-7/8 1-15/16 2	UCFCF210-30 UCFCF210-31 UCFCF210-32	171.50	6-3/8	5-3/8	3.800	17/32	5/8	15/32	1-1/16	4.500	1.625	2.031	1/2	UC210-30 UC210-31 UC210-32	FCF210	7.00
2 2-1/8 2-3/16	UCFCF211-32 UCFCF211-34 UCFCF211-35	221.60	7-1/8	6	4.250	19/32	7/8	15/32	7/8	5.000	1.531	2.189	9/16	UC211-32 UC211-34 UC211-35	FCF211	9.10
Dimensions (mm)																
25	UCFCF205	71.00	111	92.1	65.1	10.5	6.4	10	22	76.2	31	34	M8	UC205	FCF205	2.60
30	UCFCF206	92.60	127	104.8	74.1	12	10.7	10	20	85.7	29.8	38.1	M10	UC206	FCF206	3.90
35	UCFCF207	109.50	133	111.1	78.6	12	11.9	12	22	92.1	32.5	42.9	M10	UC207	FCF207	4.20
40	UCFCF208	131.25	134	111.1	78.6	12	11.9	12	26	92.1	39.7	49.2	M10	UC208	FCF208	4.60
45	UCFCF209	145.70	155	130.2	92.1	13.5	11.9	11	22	108.0	35.7	49.2	M12	UC209	FCF209	6.20
50	UCFCF210	171.50	162	136.5	96.5	13.5	15.9	12	27	114.3	41.3	51.6	M12	UC210	FCF210	7.00
55	UCFCF211	221.60	181	152.4	107.8	15	22.2	12	22	127.0	38.9	55.6	M12	UC211	FCF211	9.10

Lubrication fitting tap size for 1" and smaller shaft sizes, 1/4-28 UNF; for all other sizes, 1/8-27 NPT

INTERCHANGES: RFC UCFCF






PILOTED FLANGE CARTRIDGE UNITS

BME / KHME / UCME / UGME 200

NORMAL DUTY

Set-Screw/Eccentric Locking
Narrow Inner Ring
Cast Iron Housing
Insert detail-pg.125-126
Metric

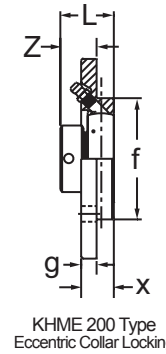

BME 200 Type
Set-Screw Locking




KHME 200 Type
Eccentric Collar Locking

Shaft Diam. (mm)	AMI Unit # Complete with B 200 Type	List Price	AMI Unit # Complete with KH 200 Type	List Price	Dimensions (mm)											Bolt Size (mm)	Bearing #		Housing #	Weight (lb.)
					a	p	e	s	g	x	f	Z		Bi	L					
												BME	KHME							
20	BME204	67.75	KHME204	95.35	100	78	55.2	9.0	8	17	62	15.7	21.5	24.7	31.0	M8	B4	KH204	ME204	1.20
25	BME205	82.60	KHME205	121.55	115	90	63.6	9.0	9	19	70	17.0	21.0	27.0	31.0	M8	B5	KH205	ME205	1.60
30	BME206	90.45	KHME206	150.30	125	100	70.7	11.5	9	20	80	20.3	24.7	30.3	35.7	M10	B6	KH206	ME206	2.00
35	BME207 BME208	120.25	KHME207	171.30	135	110	77.8	11.5	10	20	90	23.4	28.4	32.9	38.9	M10	B7	KH207	ME207	2.80
40		150.55	KHME208	212.30	145	120	84.9	11.5	11	23	100	25.5	31.7	35.5	43.7	M10	B8	KH208	ME208	3.40
45	—	—	KHME209	224.95	155	130	91.9	14	12	25	105	—	30.7	—	43.7	M12	—	KH209	ME209	4.60
50			KHME210	248.00	165	135	95.5	14	13	25	110	—	31.7	—	43.7	M12	—	KH210	ME210	5.00

Lubrication fitting tap size for 25mm and smaller shaft sizes, 1/4-28 UNF; for all other sizes, 1/8-27 NPT

INTERCHANGES: PME PMEY

Set-Screw/Eccentric Locking
Wide Inner Ring
Cast Iron Housing
Insert Detail-pg.113,115
Metric

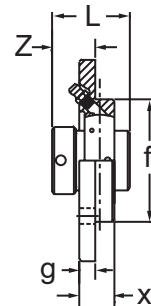



UCME 200 Type
Set-Screw Locking

UGME 200 Type
Eccentric Collar Locking

Shaft Diam. (mm)	AMI Unit # Complete with UC 200 Type	List Price	AMI Unit # Complete with UG 200 Type	List Price	Dimensions (mm)										Bolt Size (mm)	Bearing #		Housing #	Weight (lb.)	
					a	p	e	s	g	x	f	Z		Bi		L				
												UCME	UGME							
20	UCME204	95.60	UGME204	100.85	100	78	55.2	9.0	8	17	62	16.3	24.6	31.0	43.7	M8	UC204	UG204	ME204	1.20
25	UCME205	122.30	UGME205	132.85	115	90	63.6	9.0	9	19	70	17.2	24.4	34.0	44.4	M8	UC205	UG205	ME205	1.80
30	UCME206	147.25	UGME206	159.40	125	100	70.7	11.5	9	20	80	20.2	28.1	38.1	48.4	M10	UC206	UG206	ME206	2.40
35	UCME207	164.65	UGME207	182.20	135	110	77.8	11.5	10	20	90	24.4	31.3	42.9	51.1	M10	UC207	UG207	ME207	3.00
40	UCME208	208.05	UGME208	226.00	145	120	84.9	11.5	11	23	100	29.2	33.9	49.2	56.3	M10	UC208	UG208	ME208	3.60
45	UCME209	218.10	UGME209	237.65	155	130	91.9	14	12	25	105	28.2	32.9	49.2	56.3	M12	UC209	UG209	ME209	4.40
50	UCME210	243.80	UGME210	256.40	165	135	95.5	14	13	25	110	31.6	37.1	51.6	62.7	M12	UC210	UG210	ME210	5.20

Lubrication fitting tap size for 25mm and smaller shaft sizes, 1/4-28 UNF; for all other sizes, 1/8-27 NPT

INTERCHANGES: RME RMEY



Set-Screw Locking
Eccentric Locking Available
Wide Inner Ring
Cast Iron Housing
Insert Detail-pg.121-122
Inch and Metric

Shaft Diam. (in.)	AMI Unit #	List Price	Dimensions (in.)			Bearing #	Housing #	Weight (lb.)
			a	x	Bi			
1/2	UCLC201-8	63.40	2-11/16	7/8	1.024	UCW201-8	LC203	1.12
5/8	UCLC202-10					UCW202-10		1.10
3/4	UCLC204-12	63.40	2-15/16	7/8	1.220	UC204-12	LC204	1.28
7/8	UCLC205-14	68.50	3-1/8	1-1/32	1.339	UC205-14	LC205	1.61
15/16	UCLC205-15					UC205-15		
1	UCLC205-16					UC205-16		
1-1/16	UCLC206-17	89.80	3-1/2	1-3/32	1.500	UC206-17	LC206	2.09
1-1/8	UCLC206-18					UC206-18		
1-3/16	UCLC206-19					UC206-19		
1-1/4	UCLC206-20					UC206-20		
1-1/4	UCLC207-20	105.80	3-7/8	1-7/32	1.689	UC207-20	LC207	2.64
1-5/16	UCLC207-21					UC207-21		
1-3/8	UCLC207-22					UC207-22		
1-7/16	UCLC207-23					UC207-23		
1-1/2	UCLC208-24	129.25	4-3/16	1-15/32	1.937	UC208-24	LC208	3.74
1-9/16	UCLC208-25					UC208-25		
1-5/8	UCLC209-26	140.40	4-3/8	1-7/16	1.937	UC209-26	LC209	3.74
1-11/16	UCLC209-27					UC209-27		
1-3/4	UCLC209-28					UC209-28		
1-7/8	UCLC210-30	165.15	4-9/16	1-15/32	2.031	UC210-30	LC210	4.18
1-15/16	UCLC210-31					UC210-31		
2	UCLC210-32					UC210-32		
2	UCLC211-32	212.20	4-15/16	1-19/32	2.189	UC211-32	LC211	5.28
2-1/8	UCLC211-34					UC211-34		
2-3/16	UCLC211-35					UC211-35		
2-1/4	UCLC212-36	301.70	5-7/8	1-5/8	2.563	UC212-36	LC212	8.36
2-3/8	UCLC212-38					UC212-38		
2-7/16	UCLC212-39					UC212-39		
2-1/2	UCLC213-40	394.90	5-7/8	1-5/8	2.563	UC213-40	LC213	7.92
Dimensions (mm)								
12	UCC201	63.40	72	20	31	UC201	C204	1.20
15	UCC202					UC202		1.16
17	UCC203					UC203		1.14
20	UCC204	63.40	72	20	31	UC204	C204	1.09
25	UCC205	68.50	80	22	34	UC205	C205	1.45
30	UCC206	89.80	85	27	38.1	UC206	C206	1.83
35	UCC207	105.80	90	28	42.9	UC207	C207	2.07
40	UCC208	129.25	100	30	49.2	UC208	C208	2.68
45	UCC209	140.40	110	31	49.2	UC209	C209	3.35
50	UCC210	165.15	120	33	51.6	UC210	C210	4.24
55	UCC211	212.20	125	35	55.6	UC211	C211	4.68
60	UCC212	301.70	130	38	65.1	UC212	C212	5.58
65	UCC213	394.90	140	40	65.1	UC213	C213	6.69

NOTE: Recommended housing bore:

Rotating Shaft: nominal +0.001" ~ +0.003" (+0.025 mm ~ +0.076 mm).

Stationary Shaft: nominal +0.000" ~ -0.002" (+0.000 mm ~ -0.050 mm)

Lubrication fitting tap size 1/4-28 UNF

INTERCHANGES: RC UCC SC





CYLINDRICAL RUBBER CARTRIDGE UNITS


BRRCSM / KHRRCSM 200

NORMAL DUTY

Set-Screw/Eccentric Locking
Narrow Inner Ring
Rubber Housing
Non-Relube
Insert Detail-pg.125-126
Inch and Metric



BRRCSM 200 Type
Set-Screw Locking





KHRRCSM 200 Type
Eccentric Collar Locking



Shaft Diam. (in.)	AMI Unit # Complete with B 200 Type	List Price	AMI Unit # Complete with KH 200 Type	List Price	Dimensions (in.)						Bearing #		Housing #	Weight (lb.)
					a	x	Z		Bi	L	B	KHR		
							BRRCSM	KHRRCSM.						
1/2	BRRCSM201-8	35.90	KHRRCSM201-8	39.10	2.559	0.984	1.122	1.362	0.866	1-1/8	BR1-8	KHR201-8	RCSM203	0.40
5/8	BRRCSM202-10		KHRRCSM202-10		2.559	0.984	1.189	1.417	0.972	1-7/32	BR2-10	KHR202-10		
3/4	BRRCSM204-12	35.90	KHRRCSM204-12	43.00	2.559	0.984	1.189	1.417	0.972	1-7/32	BR4-12	KHR204-12	RCSM204	0.40
7/8	BRRCSM205-14	41.45	KHRRCSM205-14	46.10	2.559	0.984	1.260	1.417	1.063	1-7/32	BR5-14	KHR205-14	RCSM205	0.60
15/16	BRRCSM205-15		KHRRCSM205-15								BR5-15	KHR205-15		0.60
1	BRRCSM205-16		KHRRCSM205-16								BR5-16	KHR205-16		0.40
1-1/16	—	—	*KHRRCSM206-17	59.75	2.835	1.102	1.429	1.602	1.193	1-13/32	BR6-17	KHR206-17	RCSM206	0.80
1-1/8	BRRCSM206-18	KHRRCSM206-18	BR6-18								KHR206-18			
1-3/16	BRRCSM206-19	KHRRCSM206-19	BR6-19								KHR206-19			
1-1/4	BRRCSM206-20	KHRRCSM206-20	BR6-20								KHR206-20			
Dimensions (mm)														
12	BRRCSM201	35.90	KHRRCSM201	39.10	65	25	28.5	34.6	22.0	28.6	BR1	KHR201	RCSM203	0.40
15	BRRCSM202		KHRRCSM202								BR2	KHR202		
17	BRRCSM203		KHRRCSM203								BR3	KHR203		
20	BRRCSM204	35.90	KHRRCSM204	43.00	65	25	30.2	36.0	24.7	31.0	BR4	KHR204	RCSM204	0.40
25	BRRCSM205	41.45	KHRRCSM205	46.10	65	25	32.0	36.0	27.0	31.0	BR5	KHR205	RCSM205	0.40
30	BRRCSM206	56.70	KHRRCSM206	59.75	72	28	36.3	40.7	30.3	35.7	BR6	KHR206	RCSM206	0.60

*Consult factory for availability

INTERCHANGES: RCSM RCSMB

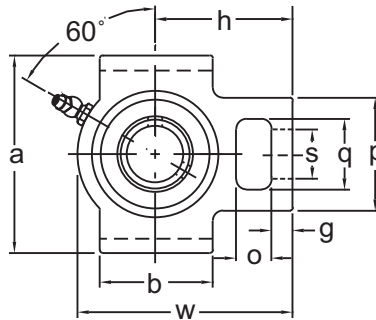

Set-Screw Locking
Wide Inner Ring
Cast Iron Housing
Insert Detail-pg.121
Inch Sizes



Shaft Diam. (in.)	AMI Unit #	List Price	Dimensions (in.)															Bearing #	Housing #	Weight (lb.)
			o	g	p	q	s	b	k	e	a	w	J	x	h	Z	Bi			
1/2	UCST201-8	54.15																UC201-8	ST204	1.85
5/8	UCST202-10																	UC202-10		
11/16	UCST203-11																	UC203-11		
3/4	UCST204-12	59.20																UC204-12	ST205	1.76
7/8	UCST205-14																	UC205-14		
15/16	UCST205-15																	UC205-15		
1	UCST205-16	69.60																UC205-16	ST206	2.42
1-1/16	UCST206-17																	UC206-17		
1-1/8	UCST206-18																	UC206-18		
1-3/16	UCST206-19	84.45																UC206-19	ST207	3.53
1-1/4	UCST206-20																	UC206-20		
1-1/4	UCST207-20																	UC207-20		
1-5/16	UCST207-21	100.90																UC207-21	ST208	5.51
1-3/8	UCST207-22																	UC207-22		
1-7/16	UCST207-23																	UC207-23		
1-1/2	UCST208-24	109.65																UC208-24	ST209	5.29
1-9/16	UCST208-25																	UC208-25		
1-5/8	UCST209-26																	UC209-26		
1-11/16	UCST209-27	130.90																UC209-27	ST210	5.29
1-3/4	UCST209-28																	UC209-28		
1-7/8	UCST210-30																	UC210-30		
1-15/16	UCST210-31	163.50																UC210-31	ST211	9.04
2	UCST210-32																	UC210-32		
2-1/8	UCST211-32																	UC211-32		
2-3/16	UCST211-34	219.90																UC211-34	ST212	11.02
2-1/4	UCST211-35																	UC211-35		
2-3/8	UCST212-36																	UC212-36		
2-7/16	UCST212-38	283.90																UC212-38	ST213	15.43
2-1/2	UCST212-39																	UC212-39		
2-1/2	UCST213-40																	UC213-40		
2-11/16	UCST214-43	488.00																UC214-43	ST214	16.50
2-3/4	UCST214-44																	UC214-44		

Lubrication fitting tap size for 1" and smaller shaft sizes, 1/4-28 UNF; for all other sizes, 1/8-27 NPT

INTERCHANGES:	VTWS	WSTU	YTU	TH3U-N	WSTU250W	RTUEY	TC-25	TYB-TF	ST
---------------	------	------	-----	--------	----------	-------	-------	--------	----



Set-Screw Locking
Wide Inner Ring
Cast Iron Housing
Insert Detail-pg.122
Covers Available-pg.60
Metric

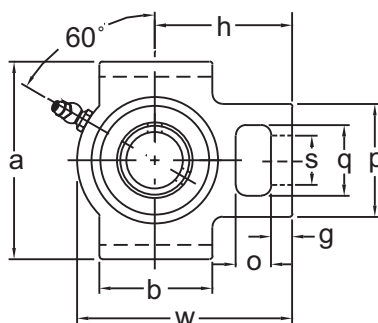


Shaft Diam. (mm)	AMI Unit #	List Price	Dimensions (mm)															Bearing #	Housing #	Weight (lb.)
			o	g	p	q	s	b	k	e	a	w	J	x	h	Z	Bi			
12	UCT201	54.15	16	10	51	32	19	51	12	76	89	94	32	21	61	28.8	31	UC201	T204	1.76
15	UCT202																	UC202		1.72
17	UCT203																	UC203		1.69
20	UCT204																	UC204		1.65
25	UCT205	59.20	16	10	51	32	19	51	12	76	89	97	32	24	62	31.7	34	UC205	T205	1.83
30	UCT206	69.60	16	10	56	37	22	57	12	89	102	113	37	28	70	36.2	38.1	UC206	T206	2.90
35	UCT207	84.45	16	13	64	37	22	64	12	89	102	129	37	30	78	40.4	42.9	UC207	T207	3.57
40	UCT208	100.90	19	16	83	49	29	83	16	102	114	144	49	33	88	46.7	49.2	UC208	T208	5.35
45	UCT209	109.65	19	16	83	49	29	83	16	102	117	144	49	35	87	47.7	49.2	UC209	T209	5.35
50	UCT210	130.90	19	16	83	49	29	86	16	102	117	149	49	37	90	51.1	51.6	UC210	T210	5.58
55	UCT211	163.50	25	19	102	64	35	95	22	130	146	171	64	38	106	52.4	55.6	UC211	T211	8.92
60	UCT212	219.90	32	19	102	64	35	102	22	130	146	194	64	42	119	60.7	65.1	UC212	T212	11.4
65	UCT213	283.90	32	21	111	70	41	121	26	151	167	224	70	44	137	61.7	65.1	UC213	T213	15.6
70	UCT214	375.00	32	21	111	70	41	121	26	151	167	224	70	46	137	67.4	74.6	UC214	T214	15.8
75	UCT215	415.50	32	21	111	70	41	121	26	151	167	232	70	48	140	68.5	77.8	UC215	T215	16.7
80	UCT216	478.00	32	21	111	70	41	121	26	165	184	235	70	51	140	74.8	82.6	UC216	T216	19.0
85	UCT217	573.30	38	29	124	73	48	157	30	173	198	260	73	54	162	78.6	85.7	UC217	T217	25.0

Lubrication fitting tap size for 25mm and smaller shaft sizes, 1/4-28 UNF; for all other sizes, 1/8-27 NPT

INTERCHANGES: UCT



Hub City® Style

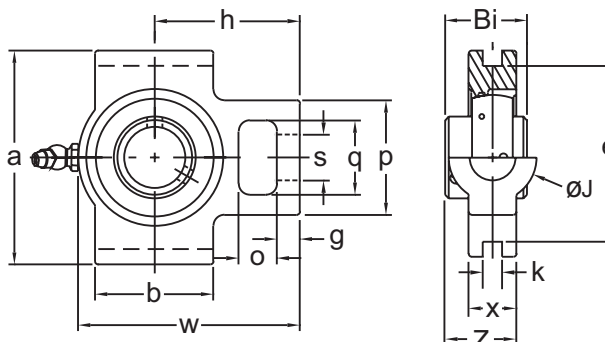

Set-Screw Locking
Wide Inner Ring
Cast Iron Housing
Insert Detail-pg.121
Inch

Shaft Diam. (in.)	AMI Unit #	List Price	Dimensions (in.)															Bearing #	Housing #	Weight (lb.)
			o	g	p	q	s	b	k	e	a	w	J	x	h	Z	Bi			
1/2	UCNST201-8	54.15	5/8	3/8	1-7/8	1-7/32	3/4	1-3/4	5/16	3	3-1/2	3-35/64	1-7/16	25/32	2-3/8	1.111	1.220	UC201-8	NST204	1.85
5/8	UCNST202-10																	UC202-10		
11/16	UCNST203-11																	UC203-11		
3/4	UCNST204-12																	UC204-12		
7/8	UCNST205-14	59.20	5/8	3/8	1-7/8	1-7/32	3/4	1-15/16	5/16	3	3-1/2	3-5/8	1-7/16	25/32	2-3/8	1.167	1.339	UC205-14	NST205	1.76
15/16	UCNST205-15																	UC205-15		
1	UCNST205-16																	UC205-16		
1-1/16	UCNST206-17																	UC206-17		
1-1/8	UCNST206-18	69.60	3/4	1/2	2-1/8	1-11/32	7/8	2-3/8	5/16	3-1/2	4	4-1/4	1-19/32	7/8	2-25/32	1.312	1.500	UC206-18	NST206	2.42
1-3/16	UCNST206-19																	UC206-19		
1-1/4	UCNST206-20																	UC206-20		
1-1/4	UCNST207-20																	UC207-20		
1-5/16	UCNST207-21	84.45	3/4	1/2	2-1/8	1-11/32	7/8	2-5/8	5/16	3-1/2	4	4-5/8	1-19/32	29/32	2-15/16	1.453	1.689	UC207-21	NST207	3.53
1-3/8	UCNST207-22																	UC207-22		
1-7/16	UCNST207-23																	UC207-23		
1-1/2	UCNST208-24																	UC208-24		
1-9/16	UCNST208-25	100.90	3/4	5/8	2-5/8	1-37/64	1-1/8	2-15/16	5/16	4	4-1/2	5-1/8	1-13/16	31/32	3-1/4	1.673	1.937	UC208-25	NST208	5.51
1-5/8	UCNST209-26	109.65	3/4	5/8	2-5/8	1-37/64	1-1/8	3-1/8	5/16	4	4-1/2	5-7/16	1-13/16	1-1/32	3-7/16	1.705	1.937	UC209-26	NST209	5.29
1-11/16	UCNST209-27																	UC209-27		
1-3/4	UCNST209-28																	UC209-28		
1-7/8	UCNST210-30																	UC210-30		
1-15/16	UCNST210-31	130.90	3/4	5/8	2-5/8	1-37/64	1-1/8	3-5/16	5/16	4	4-1/2	5-11/16	1-13/16	1-1/16	3-9/16	1.814	2.031	UC210-31	NST210	5.29
2	UCNST210-32																	UC210-32		
2	UCNST211-32																	UC211-32		
2-1/8	UCNST211-34																	UC211-34		
2-3/16	UCNST211-35	163.50	1	3/4	3-1/4	1-15/16	1-3/8	3-11/16	5/16	5-1/8	5-3/4	6-15/32	2-1/8	1-1/8	4-1/8	1.878	2.189	UC211-35	NST211	9.04
2-1/4	UCNST212-36																	UC212-36		
2-3/8	UCNST212-38																	UC212-38		
2-7/16	UCNST212-39																	UC212-39		

Lubrication fitting tap size for 1" and smaller shaft sizes, 1/4-28 UNF; for all other sizes, 1/8-27 NPT


INTERCHANGES: UCTRS TU250W



HANGER BEARING UNITS

UCECH 200

Set-Screw Locking
Wide Inner Ring
Ductile Iron Housing
Insert detail-pg.121
Inch and Metric

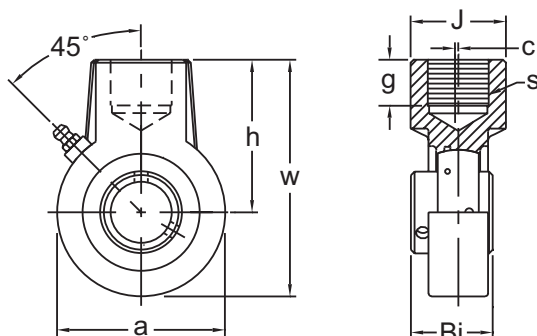

NORMAL DUTY

Shaft Diam. (in.)	AMI Unit #	List Price	Dimensions (in.)								Bearing #	Housing #	Weight (lb.)
			a	w	h	J	s (BSP)	g	Bi	c			
1/2 5/8 11/16 3/4	UCECH201-8 UCECH202-10 UCECH203-11 UCECH204-12	78.20	2-3/4	3-7/8	2-1/2	1-9/16	3/4-14	3/4	1.220	0	UC201-8 UC202-10 UC203-11 UC204-12	ECH204	1.87
7/8 15/16 1	UCECH205-14 UCECH205-15 UCECH205-16	87.00	2-3/4	3-7/8	2-1/2	1-9/16	3/4-14	3/4	1.339	0	UC205-14 UC205-15 UC205-16	ECH205	1.63
1-1/16 1-1/8 1-3/16 1-1/4	UCECH206-17 UCECH206-18 UCECH206-19 UCECH206-20	101.00	3-1/8	4-1/8	2-1/2	1-9/16	3/4-14	3/4	1.500	0	UC206-17 UC206-18 UC206-19 UC206-20	ECH206	2.01
1-1/4 1-5/16 1-3/8 1-7/16	UCECH207-20 UCECH207-21 UCECH207-22 UCECH207-23	128.85	3-5/8	4-9/16	2-3/4	1-9/16	3/4-14	3/4	1.689	0	UC207-20 UC207-21 UC207-22 UC207-23	ECH207	2.64
1-1/2 1-9/16	UCECH208-24 UCECH208-25	157.00	3-3/4	4-3/4	2-7/8	1-9/16	3/4-14	3/4	1.937	0.079	UC208-24 UC208-25	ECH208	3.09
1-5/8 1-11/16 1-3/4	UCECH209-26 UCECH209-27 UCECH209-28	173.90	4-1/4	5-3/8	3-1/4	1-7/8	1-11	13/16	1.937	0.157	UC209-26 UC209-27 UC209-28	ECH209	3.97
1-7/8 1-15/16 2	UCECH210-30 UCECH210-31 UCECH210-32	199.00	4-1/2	5-1/2	3-1/4	1-7/8	1-11	13/16	2.031	0.197	UC210-30 UC210-31 UC210-32	ECH210	4.19
2 2-1/8 2-3/16	UCECH211-32 UCECH211-34 UCECH211-35	292.90	5-5/8	6-13/16	4	2-23/64	1-1/4-11	1-1/8	2.189	0.343	UC211-32 UC211-34 UC211-35	ECH211	8.19
2-1/4 2-3/8 2-7/16	UCECH212-36 UCECH212-38 UCECH212-39	355.65	5-5/8	6-13/16	4	2-23/64	1-1/4-11	1-1/8	2.563	0.343	UC212-36 UC212-38 UC212-39	ECH212	8.6
2-1/2	UCECH213-40	429.15	6-3/4	7-7/8	4-5/8	2-3/4	1-1/2-11	1-1/4	2.563	0.374	UC213-40	ECH213	12.57
2-11/16 2-3/4	UCECH214-43 UCECH214-44	524.40	6-3/4	7-7/8	4-5/8	2-3/4	1-1/2-11	1-1/4	2.937	0.374	UC214-43 UC214-44	ECH214	12.68
2-15/16 3	UCECH215-47 UCECH215-48	563.50	6-3/4	7-7/8	4-5/8	2-3/4	1-1/2-11	1-1/4	3.063	0.374	UC215-47 UC215-48	ECH215	12.55
Dimensions (mm)													
20	UCECH204	78.20	70	99	64	40	3/4-14	19	31	0	UC204	ECH204	1.87
25	UCECH205	87.00	70	99	64	40	3/4-14	19	34	0	UC205	ECH205	1.65
30	UCECH206	101.00	80	104	64	40	3/4-14	19	38.1	0	UC206	ECH206	2.03
35	UCECH207	128.85	92	116	70	40	3/4-14	19	42.9	0	UC207	ECH207	2.68
40	UCECH208	157.00	96	121	73	40	3/4-14	19	49.2	2	UC208	ECH208	3.12
45	UCECH209	173.90	108	136	82	48	1-11	21	49.2	4	UC209	ECH209	4.01
50	UCECH210	199.00	114	140	83	48	1-11	21	51.6	5	UC210	ECH210	4.24
55	UCECH211	292.90	143	173	101.6	60	1-1/4-11	28.5	55.6	8.7	UC211	ECH211	8.22
60	UCECH212	355.65	143	173	101.6	60	1-1/4-11	28.5	65.1	8.7	UC212	ECH212	8.63
65	UCECH213	429.15	171	200	117.5	70	1-1/2-11	32	65.1	9.5	UC213	ECH213	12.61
70	UCECH214	524.40	171	200	117.5	70	1-1/2-11	32	74.6	9.5	UC214	ECH214	12.73
75	UCECH215	563.50	171	200	117.5	70	1-1/2-11	32	77.8	9.5	UC215	ECH215	12.61

Lubrication fitting tap size for 1" and smaller shaft sizes, 1/4-28 UNF; for all other sizes, 1/8-27 NPT


INTERCHANGES: RCH (Accu-Loc Style) UCHA MEHB UCH SEHB

Shaft Diam. (mm)	Bore Size	Pillow Block						2 Bolt			4 Bolt			Flange Cartridge			Take-Up		
		UCP (pg. 13)			UCLP (pg. 18)			UCFL (pg. 31)			UCF (pg. 44)			UCFC (pg. 49)			UCST (pg. 56)		
		Z (in.)	Z (mm)	List Price	Z (in.)	Z (mm)	List Price	Z (in.)	Z (mm)	List Price	Z (in.)	Z (mm)	List Price	Z (in.)	Z (mm)	List Price	Z (in.)	Z (mm)	List Price
12	201																		
15	202	2.205	56	82.20	1.807	45.9	82.20	1.693	43	69.50	1.693	43	69.50	1.496	38	78.00	2.315	56	91.00
17	203																		
20	204	2.205	56	82.20	1.933	49.1	82.20	1.693	43	69.50	1.693	43	69.50	1.496	38	78.00	2.315	56	91.00
25	205	2.480	63	92.90	2.457	62.4	92.90	1.850	47	78.70	1.890	48	78.70	1.654	42	89.30	2.473	63	103.60
30	206	2.559	65	117.50	2.283	58.0	117.50	1.929	49	101.30	2.008	51	101.30	1.693	43	110.40	2.394	65	126.30
35	207	2.756	70	135.60	2.728	69.3	135.60	2.126	54	117.80	2.126	54	117.80	1.811	46	127.50	2.762	70	145.20
40	208	3.228	82	162.80	3.075	78.1	162.80	2.402	61	142.40	2.441	62	142.40	2.047	52	156.60	3.304	82	177.00
45	209	3.228	82	181.90	3.197	81.2	181.90	2.480	63	158.30	2.480	63	158.30	2.008	51	182.20	3.225	82	205.80
50	210	2.425	87	217.50	3.268	83.0	217.50	2.598	66	189.30	2.598	66	189.30	2.126	54	208.00	3.344	87	236.20
55	211	3.465	88	276.00	3.555	90.3	276.00	2.717	69	240.50	2.717	69	240.50	2.244	57	276.00	3.594	88	311.60
60	212	4.016	102	364.70	3.976	101.0	364.70	3.150	80	315.50	3.150	80	315.50	2.677	68	340.30	4.175	102	389.50
65	213	4.016	102	422.90	3.976	101.0	422.90	3.189	81	370.80	3.189	81	370.80	2.638	67	409.60	4.283	102	461.70


Example: UCP205C or UCP205CE; Open Cover (C) with Contact Seal, Closed Cover (CE)

Note: For Take-Up and Pillow Block Units: "C" suffix indicates 2 open pressed steel covers; "CE" suffix indicates 1 open and 1 closed cover. For more dimensional information, please refer to the page number that follows each unit above.


UCP 200 C(CE)

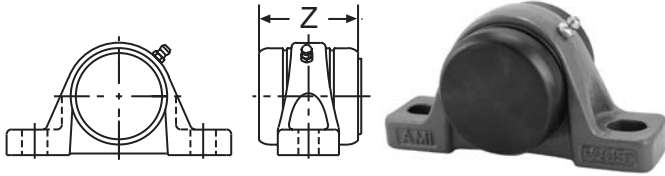


UCLP 200 C(CE)

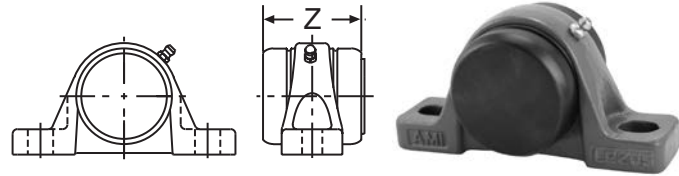


UCFL 200 C(CE)

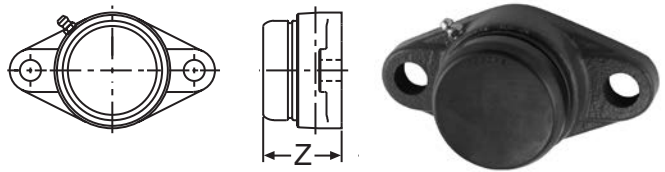


UCF 200 C(CE)

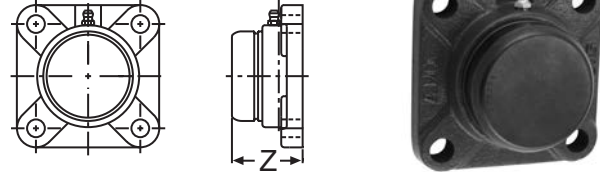

UCFC 200 C(CE)

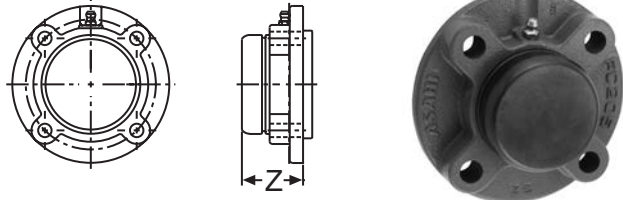

UCT 200 C(CE)

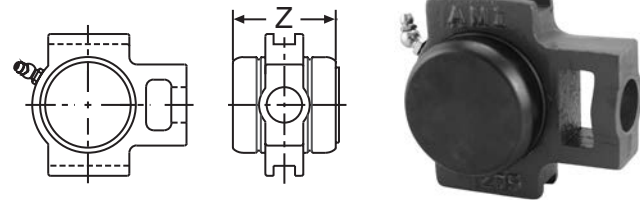


Shaft Diam. (mm)	Bore Size	Pillow Block			2 Bolt			4 Bolt			Flange Cartridge			Take-Up		
		CUCP			CUCFL			CUCF			CUCFC			CUCT		
		Z (in.)	Z (mm)	List Price	Z (in.)	Z (mm)	List Price	Z (in.)	Z (mm)	List Price	Z (in.)	Z (mm)	List Price	Z (in.)	Z (mm)	List Price
12	201	2.441	62	121.60	1.811	46	89.00	1.811	46	89.00	1.614	41	97.70	2.441	62	130.40
15	202															
17	203															
20	204	2.441	62	121.60	1.811	46	89.00	1.811	46	89.00	1.614	41	97.70	2.441	62	130.40
25	205	2.756	70	134.30	2.008	51	99.30	2.008	51	99.30	1.772	45	110.00	2.756	70	145.00
30	206	2.913	74	173.80	2.165	55	129.50	2.165	55	129.50	1.850	47	138.50	2.913	74	182.90
35	207	3.150	80	195.20	2.323	59	147.60	2.323	59	147.60	2.008	51	157.30	3.150	80	204.80
40	208	2.543	90	221.60	2.598	66	171.80	2.598	66	171.80	2.205	56	186.00	2.543	90	235.90
45	209	2.543	90	237.50	2.638	67	186.00	2.638	67	186.00	2.165	55	210.00	2.543	90	261.50
50	210	3.858	98	277.00	2.795	71	219.00	2.795	71	219.00	2.323	59	237.90	3.858	98	295.70
55	211	3.937	100	337.50	2.953	75	271.20	2.953	75	271.20	2.480	63	306.70	3.937	100	373.00
60	212	4.488	114	421.90	3.386	86	343.60	3.386	86	343.60	2.913	74	368.50	4.488	114	445.80
65	213	4.646	118	483.70	3.504	89	401.10	3.504	89	401.10	2.953	75	440.00	4.646	118	522.50
70	214	5.276	134	578.80	3.858	98	474.70	3.858	98	474.70	3.307	84	523.20	5.276	134	627.30
75	215	5.354	136	647.40	4.016	102	536.40	4.016	102	536.40	3.386	86	575.20	5.354	136	686.20
80	216	5.748	146	745.00	4.213	107	625.00	4.213	107	625.00	3.583	91	654.20	5.748	146	774.30
85	217	5.906	150	888.00	4.370	111	752.00	4.370	111	752.00	3.661	93	776.50	5.906	150	912.30
90	218	6.457	164	1090.00	4.803	122	932.00	4.803	122	932.00	4.094	104	969.00	-	-	-


Example: CUCP205C or CUCP205CE; Open Cover (C) with Contact Seal, Closed Cover (CE)

Note: For Take-Up and Pillow Block Units: "C" suffix indicates 2 open cast iron covers; "CE" suffix indicates 1 open and 1 closed cover.
For more dimensional information, please refer to the page number that follows each unit above.


CUCP 200 C(CE)

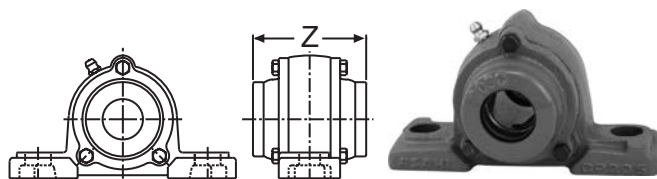


CUCFL 200 C(CE)

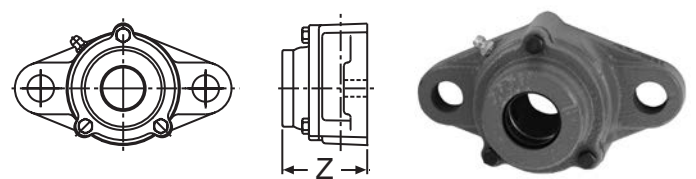


CUCF 200 C(CE)

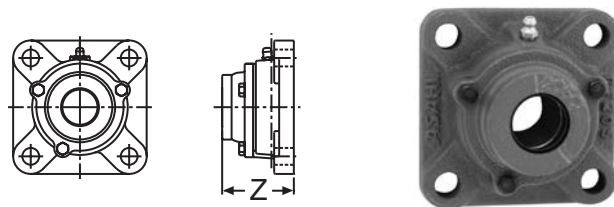


CUCFC 200 C(CE)

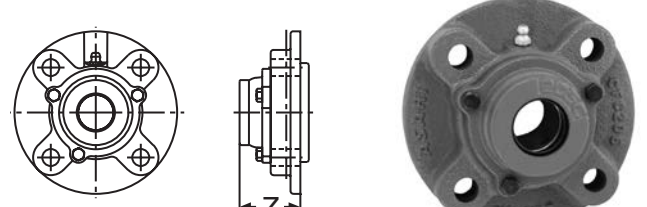




CUCT 200 C(CE)

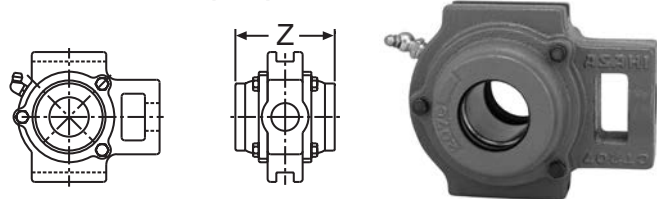



AMI

Accu-Loc®

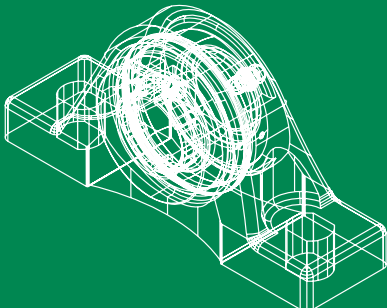
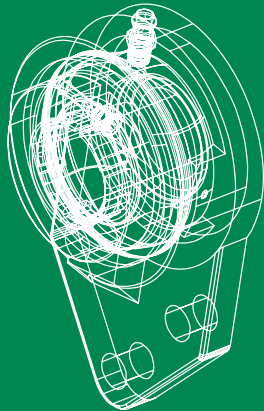




ACCU-LOC® PILLOW BLOCKS

UEP 200

Concentric Locking
52100 Bearing Steel
w/Black Oxide Finish
Cast Iron Housing
Insert detail-pg.133
Inch and Metric



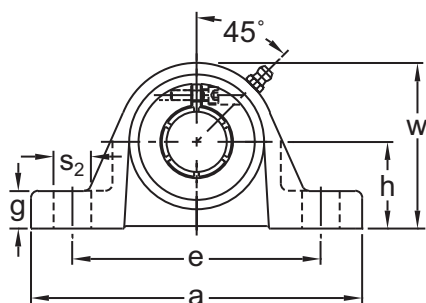


NORMAL DUTY

Shaft Diam. (in.)	AMI Unit #	List Price	Dimensions (in.)										Bolt Size (in.)	Bearing #	Housing #	Weight (lb.)
			h	a	e		b	s ₁	s ₂	g	w	L				
3/4	UEP204-12	73.00	1-5/16	5	3-3/8	4-1/8	1-1/2	1/2	3/4	19/32	2-9/16	1.299	3/8	UE204-12	P204T	1.59
7/8	UEP205-14	76.10	1-7/16	5-1/2	3-3/4	4-1/2	1-1/2	1/2	3/4	5/8	2-3/4	1.394	3/8	UE205-14	P205T	1.94
15/16	UEP205-15													UE205-15		
1	UEP205-16													UE205-16		
1-1/8	UEP206-18	99.80	1-11/16	6-1/2	4-7/16	5-1/16	1-7/8	21/32	13/16	23/32	3-9/32	1.567	1/2	UE206-18	P206T	3.09
1-3/16	UEP206-19													UE206-19		
1-1/4	UEP206-20													UE206-20		
1-1/4	UEP207-20	130.10	1-7/8	6-9/16	4-11/16	5-5/16	1-7/8	21/32	13/16	3/4	3-11/16	1.728	1/2	UE207-20	P207T	3.86
1-3/8	UEP207-22													UE207-22		
1-7/16	UEP207-23													UE207-23		
1-1/2	UEP208-24	135.90	1-15/16	7-1/4	4-7/8	5-7/8	2-1/8	21/32	1	3/4	3-15/16	1.976	1/2	UE208-24	P208T	4.74
1-11/16	UEP209-27	153.40	2-1/8	7-1/2	5-3/8	6-1/8	2-1/8	21/32	7/8	25/32	4-1/4	1.976	1/2	UE209-27	P209T	5.74
1-3/4	UEP209-28													UE209-28		
1-15/16	UEP210-31	172.50	2-1/4	8-1/8	5-7/8	6-5/8	2-3/8	25/32	1	7/8	4-1/2	2.071	5/8	UE210-31	P210T	6.57
2	UEP210-32													UE210-32		
2	UEP211-32	200.70	2-1/2	8-5/8	6-3/8	7-1/8	2-3/8	25/32	1	7/8	4-31/32	2.228	5/8	UE211-32	P211T	8.13
2-3/16	UEP211-35													UE211-35		
2-7/16	UEP212-39	239.60	2-3/4	9-1/2	6-7/8	7-5/8	2-3/4	25/32	1	1	5-7/16	2.622	5/8	UE212-39	P212T	11.70
Dimensions (mm)																
20	UEP204	73.00	33.3	127	86	105	38	13	19	15	65	33.0	M10	UE204	P204T	1.61
25	UEP205	76.40	36.5	140	95	114	38	13	19	16	70	35.4	M10	UE205	P205T	1.96
30	UEP206	101.30	42.9	165	113	129	48	17	21	18	83	39.8	M14	UE206	P206T	3.12
35	UEP207	129.30	47.6	167	119	135	48	17	21	19	94	43.9	M14	UE207	P207T	3.90
40	UEP208	137.40	49.2	184	124	149	54	17	25	19	100	50.2		UE208	P208T	4.79
45	UEP209	157.60	54.0	190	137	156	54	17	22	20	108	50.2		UE209	P209T	5.52
50	UEP210	176.50	57.2	206	149	168	60	20	25	22	114	52.6	M16	UE210	P210T	6.64
55	UEP211	221.90	63.5	219	162	181	60	20	25	22	126	56.6		UE211	P211T	8.22
60	UEP212	248.00	69.8	241	175	194	70	20	25	25	138	66.6		UE212	P212T	11.84

Lubrication fitting tap size for 1" and smaller shaft sizes, 1/4-28 UNF; for all other sizes, 1/8-27 NPT

INTERCHANGES: VPB-2 P2B-DL RASC KC-45 NP-T

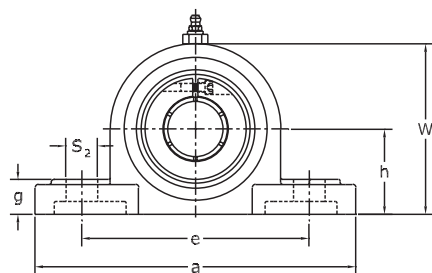

Concentric Locking
52100 Bearing Steel
w/Black Oxide Finish
Cast Iron Housing
Expansion Type
Insert detail-pg.133
Inch and Metric

Shaft Diam. (in.)	AMI Unit #	List Price	Dimensions (in.)										Bolt Size (in.)	Bearing #	Housing #	Weight (lb.)
			h	a	e		b	s ₁	s ₂	g	w	L				
					Min.	Max.										
15/16 1	UEEP205-15 UEEP205-16	158.10	1-3/4	6-1/4	4-13/32	4-31/32	2	21/32	25/32	23/32	3-11/32	1.394	1/2	UE205-15 UE205-16	EP205	3.36 3.32
1-1/8	UEEP206-18	202.20	1-7/8	6-7/8	4-23/32	5-9/32	2-1/4	21/32	25/32	25/32	3-11/16	1.567	1/2	UE206-18	EP206	4.60
1-3/16	UEEP206-19													UE206-19		4.58
1-1/4	UEEP206-20													UE206-20		4.52
1-1/4	UEEP207-20	252.20	2-1/8	8	5-13/32	5-31/32	2-1/4	21/32	25/32	7/8	4-1/4	1.728	1/2	UE207-20	EP207	6.62
1-3/8	UEEP207-22													UE207-22		6.52
1-7/16	UEEP207-23													UE207-23		6.46
1-1/2	UEEP208-24	280.20	2-5/16	8-3/4	5-13/16	6-7/16	2-5/8	25/32	15/16	1-1/32	4-9/16	1.976	5/8	UE208-24	EP208	7.94
1-11/16	UEEP209-27	306.05	2-5/16	8-3/4	5-13/16	6-7/16	2-5/8	25/32	15/16	1-1/32	4-9/16	1.976	5/8	UE209-27	EP209	7.88
1-3/4	UEEP209-28													UE209-28		7.76
1-15/16 2	UEEP210-31 UEEP210-32	347.20	2-1/2	9-1/2	6-11/32	7-5/32	2-7/8	25/32	1-1/32	1-1/16	4-31/32	2.071	5/8	UE210-31 UE210-32	EP210	9.76 9.68
2 2-3/16	UEEP211-32 UEEP211-35	428.20	2-3/4	10-1/4	6-29/32	7-19/32	3-1/8	1	1-3/32	1-3/16	5-15/32	2.228	3/4	UE211-32 UE211-35	EP211	12.12 12.08
2-7/16	UEEP212-39	509.40	3	11-1/4	7-9/16	8-7/16	3-1/4	1	1-3/16	1-1/4	5-15/16	2.622	3/4	UE212-39	EP212	15.64
Dimensions (mm)																
25	UEEP205	157.10	44.4	159	112	126	51	17	20	18	85	35.4	M14	UE205	EP205	3.35
30	UEEP206	201.40	47.6	175	120	134	57	17	20	20	94	39.8	M14	UE206	EP206	4.58
35	UEEP207	249.60	54	203	137	152	57	17	20	22	108	43.9	M14	UE207	EP207	6.52
40	UEEP208	279.50	58.7	222	148	164	67	20	24	26	116	50.2	M16	UE208	EP208	7.88
45	UEEP209	307.75	58.7	222	148	164	67	20	24	26	116	50.2	M16	UE209	UE209	7.76
50	UEEP210	347.90	63.5	241	161	182	73	20	26	27	126	52.6	M16	UE210	UE210	9.72
55	UEEP211	445.70	69.8	260	175	193	79	25	28	30	139	56.6	M20	UE211	EP211	12.12
60	UEEP212	513.00	76.2	286	192	214	83	25	30	32	151	66.6	M20	UE212	EP212	15.84

Lubrication fitting tap size 1/4-28 UNF



INTERCHANGES: EMP-T / P2B-DLH-E



ACCU-LOC® PILLOW BLOCKS

UESP 200

Concentric Locking
52100 Bearing Steel
w/Black Oxide Finish
Cast Iron Housing
Insert detail-pg.133
Inch and Metric


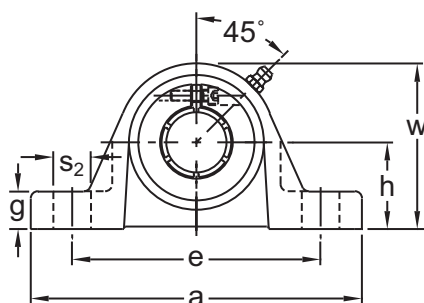


NORMAL DUTY

Shaft Diam. (in.)	AMI Unit #	List Price	Dimensions (in.)										Bolt Size (in.)	Bearing #	Housing #	Weight (lb.)
			h	a	e		b	s ₁	s ₂	g	w	L				
					Min.	Max.										
15/16 1	UESP205-15 UESP205-16	161.00	1-3/4	7	5-1/8	5-5/8	2	9/16	3/4	9/16	3-5/16	1.394	1/2	UE205-15 UE205-16	SP205	4.12 4.08
1-1/8	UESP206-18	194.50	2	7-1/2	5-3/8	6-1/8	2	9/16	7/8	5/8	3-7/8	1.567	1/2	UE206-18	SP206	4.96
1-3/16	UESP206-19													UE206-19		4.94
1-1/4	UESP206-20													UE206-20		4.88
1-1/4	UESP207-20													UE207-20		7.58
1-3/8	UESP207-22	266.00	2-3/8	8-1/4	5-5/8	6-7/8	2-1/4	3/4	1-1/4	3/4	4-1/2	1.728	5/8	UE207-22	SP207	7.48
1-7/16	UESP207-23													UE207-23		7.42
1-1/2	UESP208-24	293.95	2-5/16	8-1/2	5-7/8	7-1/8	2-3/8	3/4	1-1/4	3/4	4-9/16	1.976	5/8	UE208-24	SP208	8.38
1-11/16	UESP209-27	371.25	2-3/8	8-3/4	5-7/8	7-1/8	2-3/8	3/4	1-1/4	3/4	4-5/8	1.976	5/8	UE209-27	SP209	8.36
1-3/4	UESP209-28													UE209-28		8.24
1-15/16 2	UESP210-31 UESP210-32	379.15	2-3/4	10-1/2	6-3/4	8-1/2	2-1/2	3/4	1-1/2	7/8	5-5/16	2.071	5/8	UE210-31 UE210-32	SP210	11.76 11.68
2	UESP211-32	451.95	3-1/8	11-1/4	7-5/8	9-3/8	2-3/4	3/4	1-1/2	7/8	5-15/16	2.228	5/8	UE211-32	SP211	14.72
2-3/16	UESP211-35													UE211-35		14.68
2-7/16	UESP212-39	469.35	3-1/8	11-1/2	7-7/8	9-3/8	3	7/8	1-1/2	7/8	6-1/16	2.622	3/4	UE212-39	SP212	16.64
Shaft Diam. (mm)	AMI Unit #	List Price	Dimensions (mm)										Bolt Size (mm)	Bearing #	Housing #	Weight (lb.)
			h	a	e		b	s ₁	s ₂	g	w	L				
					Min.	Max.										
25	UESP205	161.00	44.5	177.8	130.2	142.9	50.8	14.3	19.0	14.3	84.1	35.4	M12	UE205	SP205	4.11
30	UESP206	193.70	50.8	190.5	136.5	155.6	50.8	14.3	22.2	15.9	98.4	39.8		UE206	SP206	4.94
35	UESP207	263.40	60.3	209.5	142.9	174.6	57.1	19.0	31.7	19.0	114.3	43.9		UE207	SP207	7.48
40	UESP208	293.25	58.7	215.9	149.2	181.0	60.3	19.0	31.7	19.0	115.9	50.2	M16	UE208	SP208	8.32
45	UESP209	357.95	60.3	222.2	149.2	181.0	60.3	19.0	31.7	19.0	117.5	50.2		UE209	SP209	8.24
50	UESP210	379.85	69.8	266.7	171.5	215.9	63.5	19.0	38.1	22.2	134.9	52.6	M16	UE210	SP210	11.72
55	UESP211	469.45	79.4	285.7	193.7	238.1	69.8	19.0	38.1	22.2	150.8	56.6		UE211	SP211	14.72
60	UESP212	472.65	79.4	292.1	200.0	238.1	76.2	22.2	38.1	22.2	154.0	66.6	M20	UE212	SP212	16.84

Lubrication fitting tap size for 1" and smaller shaft sizes, 1/4-28 UNF; for all other sizes, 1/8-27 NPT

INTERCHANGES: SP-T

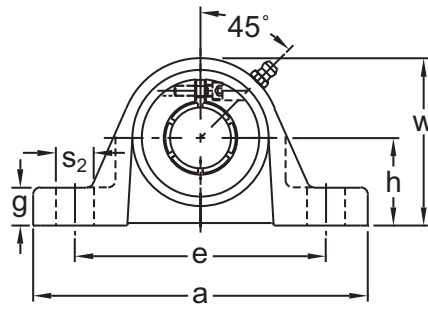

Concentric Locking
52100 Bearing Steel
w/Black Oxide Finish
Cast Iron Housing
Low Shaft Height
Insert detail-pg.133
Inch and Metric

Shaft Diam. (in.)	AMI Unit #	List Price	Dimensions (in.)										Bolt Size (in.)	Bearing #	Housing #	Weight (lb.)
			h	a	e		b	s ₁	s ₂	g	w	L				
					Min.	Max.										
3/4	UELP204-12	73.00	1-1/4	5-1/4	3-1/2	4-1/4	1-1/4	1/2	3/4	1/2	2-9/16	1.299	3/8	UE204-12	LP204T	1.64
7/8	UELP205-14	76.10	1-5/16	5-1/2	3-3/4	4-1/2	1-1/2	1/2	3/4	5/8	2-11/16	1.394	3/8	UE205-14	LP205T	1.96
15/16	UELP205-15													UE205-15		
1	UELP205-16													UE205-16		
1-1/8	UELP206-18	99.80	1-9/16	6-1/2	4-1/2	5-1/4	1-5/8	19/32	7/8	11/16	3-3/16	1.567	1/2	UE206-18	LP206T	2.86
1-3/16	UELP206-19													UE206-19		
1-1/4	UELP206-20													UE206-20		
1-1/4	UELP207-20	130.10	1-13/16	7	5	5-3/4	1-7/8	19/32	7/8	3/4	3-11/16	1.728	1/2	UE207-20	LP207T	4.52
1-3/8	UELP207-22													UE207-22		
1-7/16	UELP207-23													UE207-23		
1-1/2	UELP208-24	135.90	1-15/16	7-1/4	5-1/4	6	2	19/32	7/8	13/16	3-15/16	1.976	1/2	UE208-24	LP208T	5.18
1-11/16	UELP209-27	153.40	2-1/16	7-3/4	5-1/2	6-1/2	2-1/8	19/32	1	13/16	4-3/16	1.976	1/2	UE209-27	LP209T	5.68
1-3/4	UELP209-28													UE209-28		
1-15/16	UELP210-31	172.50	2-3/16	8-3/8	6	7	2-1/4	19/32	1	7/8	4-7/16	2.071	1/2	UE210-31	LP210T	7.01
2	UELP210-32													UE210-32		
2	UELP211-32	200.70	2-7/16	9-1/4	6-5/8	7-5/8	2-1/2	3/4	1-1/8	1	4-15/16	2.228	5/8	UE211-32	LP211T	9.68
2-3/16	UELP211-35													UE211-35		
2-7/16	UELP212-39	239.60	2-11/16	9-3/4	7-1/8	8-1/8	2-3/4	3/4	1-1/8	1-1/8	5-7/16	2.622	5/8	UE212-39	LP212T	13.02
Dimensions (mm)																
20	UELP204	73.00	31.8	133	89	108	32	12	19	13	65	33.0	M10	UE204	LP204T	1.64
25	UELP205	76.40	33.3	140	95	114	38	12	19	16	68	35.4	M10	UE205	LP205T	1.96
30	UELP206	101.30	39.7	165	114	133	41	15	22	17	81	39.8	M12	UE206	LP206T	2.86
35	UELP207	129.30	46.0	178	127	146	48	15	22	19	94	43.9	M12	UE207	LP207T	4.52
40	UELP208	137.40	49.2	184	133	152	51	15	22	21	100	50.2		UE208	LP208T	5.18
45	UELP209	157.60	52.4	197	140	165	54	15	25	21	106	50.2		UE209	LP209T	5.68
50	UELP210	176.50	55.6	213	152	178	57	15	25	22	113	52.6	M12	UE210	LP210T	7.01
55	UELP211	221.90	61.9	235	168	194	64	19	29	25	125	56.6	M16	UE211	LP211T	9.68
60	UELP212	248.00	68.3	248	181	206	70	19	29	29	138	66.6	M16	UE212	LP212T	13.02

Lubrication fitting tap size for 1" and smaller shaft sizes, 1/4-28 UNF; for all other sizes, 1/8-27 NPT


INTERCHANGES: VPLB-2 P2B-DBL KCL-45 NPL-T



ACCU-LOC® TAPPED BASE PILLOW BLOCKS

UESHE 200

Concentric Locking
52100 Bearing Steel
w/Black Oxide Finish
Cast Iron Housing
Insert detail-pg.133
Inch and Metric


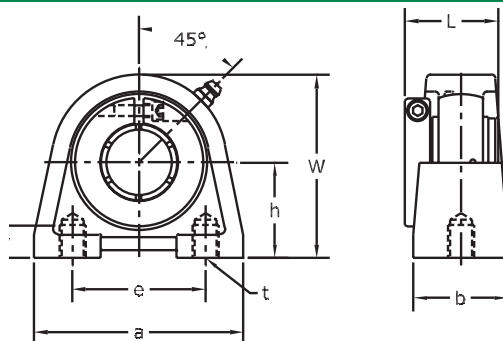


NORMAL DUTY

Shaft Diam. (in.)	AMI Unit #	List Price	Dimensions (in.)							Bolt Size (mm)	Bearing #	Housing #	Weight (lb.)
			h	a	e	b	r	w	L				
3/4	UESHE204-12	128.10	1.311	2.756	1.311	2.756	0.393	2.520	1.299	M8	UE204-12	SHE04	1.2
15/16	UESHE205-15	144.70	1.437	3.150	2.000	1.417	0.492	2.756	1.394	M10	UE205-15	SHE05	1.56
1	UESHE205-16										UE205-16		1.52
1-1/8	UESHE206-18	177.30								M10	UE206-18	SHE06	2.4
1-3/16	UESHE206-19		1.689	3.858	3.000	1.575	0.492	3.228	1.567		UE206-19		2.38
1-1/4	UESHE206-20										UE206-20		2.32
1-1/4	UESHE207-20										UE207-20		3.3
1-3/8	UESHE207-22	237.70	1.874	4.331	3.252	1.772	0.492	3.661	1.728	M10	UE207-22	SHE07	3.2
1-7/16	UESHE207-23										UE207-23		3.14
1-1/2	UESHE208-24	254.10	1.937	4.567	3.500	1.890	0.591	3.898	1.976	M12	UE208-24	SHE08	3.94
1-11/16	UESHE209-27	282.50	2.126	4.724	3.752	1.890	0.591	4.213	1.976	M12	UE209-27	SHE09	4.6
1-3/4	UESHE209-28										UE209-28		4.48
1-15/16	UESHE210-31	321.95	2.252	5.315	4.000	2.087	0.787	4.528	2.071	M16	UE210-31	SHE10	5.64
2	UESHE210-32										UE210-32		5.56
2	UESHE211-32	354.80	2.520	5.906	4.646	2.362	0.787	4.921	2.228	M16	UE211-32	SHE11	7.00
2-3/16	UESHE211-35										UE211-35		6.96
2-7/16	UESHE212-39	438.80	2.752	5.906	4.646	2.402	0.787	5.512	2.622	M16	UE212-39	SHE12	9.72
Shaft Diam. (in.)	AMI Unit #	List Price	Dimensions (in.)							Bolt Size (mm)	Bearing #	Housing #	Weight (lb.)
			h	a	e	b	r	w	L				
20	UESHE204	127.00	33.3	70	50.8	32	10.0	64	33.0	M8	UE204	SHE04	1.18
25	UESHE205	143.70	36.5	80	50.8	36	12.5	70	35.4	M10	UE205	SHE05	1.55
30	UESHE206	176.50	42.9	98	76.2	40	12.5	82	39.8	M10	UE206	SHE06	2.38
35	UESHE207	235.10	47.6	110	82.6	45	12.5	93	43.9	M10	UE207	SHE07	3.20
40	UESHE208	253.40	49.2	116	88.9	48	15.0	99	50.2	M12	UE208	SHE08	3.88
45	UESHE209	284.20	54.0	120	95.3	48	15.0	107	50.2	M12	UE209	SHE09	4.88
50	UESHE210	322.65	57.2	135	101.6	53	20.0	115	52.6	M16	UE210	SHE10	5.6
55	UESHE211	372.30	64.0	150	118.0	60	20.0	125	56.6	M16	UE211	SHE11	7.00
60	UESHE212	438.80	69.9	150	118.0	61	20.0	140	66.6	M16	UE212	SHE12	9.92

INTERCHANGES:

AMI EXCLUSIVE



Concentric Locking
52100 Bearing Steel
w/Black Oxide Finish
Cast Iron Housing
Insert detail-pg.133
Inch and Metric

Shaft Diam. (in.)	AMI Unit #	List Price	Dimensions (in.)							Bolt Holes UNC Thread t (in.)	Bearing #	Housing #	Weight (lb.)
			h	a	e	b	r	w	L				
3/4	UETB204-12	79.30	1-5/16	2-7/8	2	1-1/2	1/2	2-9/16	1.299	3/8-16	UE204-12	TB204	1.59
7/8	UETB205-14	83.20	1-7/16	3	2	1-1/2	1/2	2-13/16	1.394	3/8-16	UE205-14	TB205	1.99
15/16	UETB205-15										UE205-15		
1	UETB205-16										UE205-16		
1-1/8	UETB206-18	112.30	1-11/16	4	3	1-1/2	5/8	3-3/8	1.567	7/16-14	UE206-18	TB206	2.87
1-3/16	UETB206-19										UE206-19		
1-1/4	UETB206-20										UE206-20		
1-1/4	UETB207-20	144.90	1-7/8	4-1/4	3-1/4	1-7/8	3/4	3-3/4	1.728	1/2-13	UE207-20	TB207	4.06
1-3/8	UETB207-22										UE207-22		
1-7/16	UETB207-23										UE207-23		
1-1/2	UETB208-24	147.20	1-15/16	4-5/8	3-1/2	1-7/8	3/4	3-15/16	1.976	1/2-13	UE208-24	TB208	4.52
1-11/16	UETB209-27	164.00	2-1/8	5	3-3/4	2	3/4	4-1/4	1.976	1/2-13	UE209-27	TB209	5.24
1-3/4	UETB209-28										UE209-28		
1-15/16	UETB210-31	179.00	2-1/4	5-1/2	4	2	7/8	4-5/8	2.071	5/8-11	UE210-31	TB210	6.35
2	UETB210-32										UE210-32		
Dimensions (mm)													
20	UEPA204	80.00	30.2	76	52	38	12	62	33.0	M10	UE204	PA204	1.50
25	UEPA205	84.20	36.5	84	56	38	15	72	35.4	M10	UE205	PA205	2.01
30	UEPA206	115.10	42.9	94	66	48	18	84	39.8	M14	UE206	PA206	2.90
35	UEPA207	145.80	47.6	110	80	48	20	95	43.9	M14	UE207	PA207	4.12
40	UEPA208	149.90	49.2	116	84	54	20	100	50.2		UE208	PA208	4.57
45	UEPA209	169.30	54.2	120	90	54	25	108	50.2		UE209	PA209	5.30
50	UEPA210	183.70	57.2	130	94	60	25	116	52.6	M16	UE210	PA210	6.42

Lubrication fitting tap size for 1" and smaller shaft sizes, 1/4-28 UNF; for all other sizes, 1/8-27 NPT

INTERCHANGES: VTBB TB-DL KTBC-45 TB-T





ACCU-LOC® TWO BOLT FLANGE UNITS

UEFT 200

NORMAL DUTY



Concentric Locking
52100 Bearing Steel
w/Black Oxide Finish
Cast Iron Housing
Insert detail-pg.133
Inch and Metric

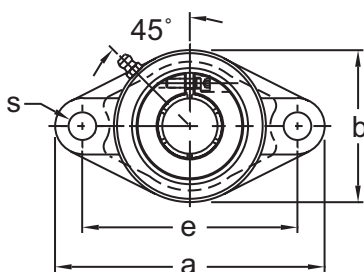

Shaft Diam. (in.)	AMI Unit #	List Price	Dimensions (in.)								Bolt Size (in.)	Bearing #	Housing #	Weight (lb.)
			a	e	g	x	s	b	Z	L				
3/4	UEFT204-12	73.00	4-13/32	3-17/32	7/16	31/32	13/32	2-3/8	1.362	1.299	3/8	UE204-12	FT204	1.17
7/8	UEFT205-14	76.10	4-7/8	3-57/64	17/32	1-1/16	1/2	2-3/4	1.456	1.394	7/16	UE205-14	FT205	1.61
15/16	UEFT205-15											UE205-15		
1	UEFT205-16											UE205-16		
1-1/8	UEFT206-18	99.80	5-9/16	4-19/32	17/32	1-3/16	1/2	3-1/4	1.644	1.567	7/16	UE206-18	FT206	2.34
1-3/16	UEFT206-19											UE206-19		
1-1/4	UEFT206-20											UE206-20		
1-1/4	UEFT207-20	130.10	6-1/8	5-1/8	9/16	1-11/32	35/64	3-3/4	1.789	1.728	1/2	UE207-20	FT207	3.41
1-3/8	UEFT207-22											UE207-22		
1-7/16	UEFT207-23											UE207-23		
1-1/2	UEFT208-24	135.90	6-3/4	5-21/32	9/16	1-1/2	35/64	4-1/8	2.056	1.976	1/2	UE208-24	FT208	4.30
1-11/16	UEFT209-27	153.40	7-1/16	5-27/32	9/16	1-9/16	5/8	4-3/8	2.087	1.976	9/16	UE209-27	FT209	4.80
1-3/4	UEFT209-28											UE209-28		
1-15/16	UEFT210-31	172.50	7-7/16	6-3/16	9/16	1-9/16	5/8	4-9/16	2.198	2.071	9/16	UE210-31	FT210	5.25
2	UEFT210-32											UE210-32		
2	UEFT211-32	200.70	8-1/2	7-1/4	13/16	1-3/4	21/32	5-1/4	2.354	2.228	5/8	UE211-32	FT211	7.91
2-3/16	UEFT211-35											UE211-35		
2-7/16	UEFL212-39	239.60	9-13/16	7-61/64	25/32	1-7/8	29/32	5-1/2	2.764	2.622	7/8	UE212-39	FL212	10.38
Dimensions (mm)														
20	UEFT204	73.00	112	89.7	11	25	10.5	60	34.6	33.0	M8	UE204	FT204	1.19
25	UEFT205	76.40	124	98.8	13	27	12.5	70	36.9	35.4	M10	UE205	FT205	1.63
30	UEFT206	101.30	141	116.7	13	30	12.5	83	41.7	39.8	M10	UE206	FT206	2.36
35	UEFT207	129.30	156	130.2	14	34	14	95	45.4	43.9	M12	UE207	FT207	3.45
40	UEFT208	137.40	171	143.7	14	38	14	105	52.2	50.2	M12	UE208	FT208	4.34
45	UEFT209	157.60	179	148.4	14	40	16	111	53.0	50.2	M14	UE209	FT209	4.85
50	UEFT210	176.50	189	157.2	14	40	16	116	55.8	52.6	M14	UE210	FT210	5.30
55	UEFT211	221.90	216	184.2	21	44	17	133	59.8	56.6	M16	UE211	FT211	8.00
60	UEFL212	248.00	250	202	20	48	23	140	70.2	66.6	M22	UE212	FL212	10.48

Lubrication fitting tap size for 1" and smaller shaft sizes, 1/4-28 UNF; for all other sizes, 1/8-27 NPT

INTERCHANGES: VF2B F2B-DL KFC2-45 SFT-T



Concentric Locking
52100 Bearing Steel
w/Black Oxide Finish
Cast Iron Housing
Insert detail-pg.133
Inch and Metric

Shaft Diam. (in.)	AMI Unit #	List Price	Dimensions (in.)								Bolt Size (in.)	Bearing #	Housing #	Weight (lb.)
			a	e	g	x	s	b	Z	L				
3/4	UELFL204-12	74.20	3-9/16	2-13/16	7/16	25/32	25/64	2-15/32	1.232	1.299	5/16	UE204-12	LFL4	0.92
7/8	UELFL205-14	76.60	3-3/4	3	7/16	25/32	25/64	2-23/32	1.264	1.394	5/16	UE205-14	LFL5	1.07
15/16	UELFL205-15											UE205-15		
1	UELFL205-16											UE205-16		
1-1/8	UELFL206-18	99.20	4-7/16	3-9/16	15/32	7/8	15/32	3-3/32	1.413	1.567	3/8	UE206-18	LFL6	1.58
1-3/16	UELFL206-19											UE206-19		
1-1/4	UELFL206-20											UE206-20		
1-1/4	UELFL207-20	129.90	4-13/16	3-15/16	1/2	15/16	15/32	3-1/2	1.551	1.728	3/8	UE207-20	LFL7	2.02
1-3/8	UELFL207-22											UE207-22		
1-7/16	UELFL207-23											UE207-23		
Dimensions (mm)														
20	UELFL204	74.20	90	71.5	11	20	10	63	31.3	33.0	M8	UE204	LFL4	0.92
25	UELFL205	76.60	95	76.2	11	20	10	69	32.1	35.4	M8	UE205	LFL5	1.07
30	UELFL206	99.20	113	90.5	12	22.5	12	79	35.9	39.8	M10	UE206	LFL6	1.58
35	UELFL207	129.90	122	100	13	24	12	89	39.4	43.9	M10	UE207	LFL7	2.02

Lubrication fitting tap size for 1" and smaller shaft sizes, 1/4-28 UNF; for all other sizes, 1/8-27 NPT

INTERCHANGES: AMI EXCLUSIVE





ACCU-LOC® TWO-BOLT FLANGE UNITS

UETFT 200

NORMAL DUTY



Concentric Locking
52100 Bearing Steel
w/Black Oxide Finish
Cast Iron Housing
Insert detail-pg.133
Inch and Metric



Shaft Diam. (in.)	AMI Unit #	List Price	Dimensions (in.)								Bolt Size (in.)	Bearing #	Housing #	Weight (lb.)
			a	e	g	x	s	b	Z	L				
7/8 15/16 1	UETFT205-14 UETFT205-15 UETFT205-16	129.90	3-3/4	3	11/16	63/64	25/64	2-3/4	1.456	1.394	3/8	UE205-14 UE205-15 UE205-16	TFT205	1.3
1-1/8 1-3/16	UETFT206-18 UETFT206-19	160.25	4-7/16	3-9/16	13/16	1-1/8	25/64	3-1/4	1.629	1.567	3/8	UE206-18 UE206-19	TFT206	2.3
1-1/4	UETFT206-20											UE206-20		
1-1/4 1-3/8 1-7/16	UETFT207-20 UETFT207-22 UETFT207-23	183.10	4-7/8	3-15/16	7/8	1-7/32	25/64	3-11/16	1.789	1.728	3/8	UE207-20 UE207-22 UE207-23	TFT207	3.0
Dimensions (mm)														
25	UETFT205	129.90	95.3	76.2	17.5	25.0	10	70.0	37.0	35.4	M8	UE205	TFT205	1.3
30	UETFT206	160.25	112.7	90.5	20.6	28.6	10	82.6	41.4	39.8		UE206	TFT206	2.3
35	UETFT207	183.10	123.8	100	22.2	31.0	10	93.7	45.4	43.9		UE207	TFT207	3.0

Lubrication fitting tap size for 1" and smaller shaft sizes, 1/4-28 UNF; for all other sizes, 1/8-27 NPT

INTERCHANGES: TFT-T



Concentric Locking
52100 Bearing Steel
w/Black Oxide Finish
Ductile Iron Housing
Insert detail-pg.133
Inch and Metric

Shaft Diam. (in.)	AMI Unit #	List Price	Dimensions (in.)								Bolt Size (in.)	Bearing #	Housing #	Weight (lb.)
			a	e	g	x	s	b	Z	L				
3/4	UEFX204-12	74.20	3-9/16	2-13/16	27/64	25/32	11/32	2-15/32	1.232	1.299	5/16	UE204-12	FX204	0.92
7/8	UEFX205-14	76.60	3-3/4	3	27/64	25/32	11/32	2-1/2	1.264	1.394	5/16	UE205-14	FX205	1.07
15/16	UEFX205-15											UE205-15		
1	UEFX205-16											UE205-16		
1-1/8	UEFX206-18	99.20	4-7/16	3-9/16	15/32	7/8	13/32	3-3/32	1.413	1.567	3/8	UE206-18	FX206	1.58
1-3/16	UEFX206-19											UE206-19		
1-1/4	UEFX206-20											UE206-20		
1-1/4	UEFX207-20	129.90	4-13/16	3-15/16	1/2	15/16	13/32	3-1/2	1.551	1.728	3/8	UE207-20	FX207	2.02
1-3/8	UEFX207-22											UE207-22		
1-7/16	UEFX207-23											UE207-23		
Dimensions (mm)														
20	UEFX204	74.20	90	71	11	20	9	63	31.3	33.0	M8	UE204	FX204	0.92
25	UEFX205	76.60	95	76	11	20	9	63.5	32.1	35.4	M8	UE205	FX205	1.07
30	UEFX206	99.20	113	90	12	22.5	10.3	78.6	35.9	39.8	M10	UE206	FX206	1.58
35	UEFX207	129.90	122	100	13	24	10.3	89	39.4	43.9	M10	UE207	FX207	2.02

Lubrication fitting tap size 1/4-28 UNF

INTERCHANGES: LFT-DL





ACCU-LOC® THREE-BOLT FLANGE UNITS

UETM 200

NORMAL DUTY



Concentric Locking
52100 Bearing Steel
w/Black Oxide Finish
Ductile Iron Housing
Insert detail-pg.133
Inch and Metric



Shaft Diam. (in.)	AMI Unit #	List Price	Dimensions (in.)								Bolt Size (in.)	Bearing #	Housing #	Weight (lb.)
			a	e	g	x	s	b	Z	L				
3/4	UETM204-12	89.10	3-9/16	2-13/16	7/16	25/32	11/32	2-1/4	1.228	1.299	5/16	UE204-12	TM204	0.85
7/8	UETM205-14	90.65	3-3/4	3	7/16	25/32	11/32	2-1/2	1.264	1.394	5/16	UE205-14	TM205	0.97
15/16	UETM205-15											UE205-15		
1	UETM205-16											UE205-16		
1-1/8	UETM206-18	123.10	4-7/16	3-9/16	15/32	27/32	13/32	2-15/16	1.382	1.567	3/8	UE206-18	TM206	1.35
1-3/16	UETM206-19											UE206-19		
1-1/4	UETM206-20											UE206-20		
1-1/4	UETM207-20	149.50	4-13/16	3-15/16	1/2	29/32	13/32	3-3/8	1.496	1.728	3/8	UE207-20	TM207	1.85
1-3/8	UETM207-22											UE207-22		
1-7/16	UETM207-23											UE207-23		
Dimensions (mm)														
20	UETM204	89.10	90	71	11	20	9	57	31.2	33.0	M8	UE204	TM204	0.85
25	UETM205	90.65	95	76.2	11	20	9	63	32.1	35.4	M8	UE205	TM205	0.97
30	UETM206	123.10	113	90	12	21	10	74	35.1	39.8	M10	UE206	TM206	1.35
35	UETM207	149.50	122	100	12	23	10	85	38.0	43.9	M10	UE207	TM207	1.85

Lubrication fitting tap size 1/4-28 UNF

INTERCHANGES: LF-DL



Concentric Locking
52100 Bearing Steel
w/Black Oxide Finish
Cast Iron Housing
Insert detail-pg.133
Inch and Metric

Shaft Diam. (in.)	AMI Unit #	List Price	Dimensions (in.)											Bolt Size (in.)	Bearing #	Housing #	Weight (lb.)
			a	h	e	J	g	x	s	b	f	Z	L				
3/4	UEFB204-12	84.10	4-1/4	1-11/16	1-1/2	7/8	5/16	1	25/64	2-1/2	2-3/8	1.424	1.299	3/8	UE204-12	FB204	1.66
7/8	UEFB205-14	93.10	4-3/4	1-13/16	1-5/8	1-1/8	1/2	1-1/8	25/64	2-3/4	2-1/2	1.487	1.394	3/8	UE205-14	FB205	2.20
15/16	UEFB205-15														UE205-15		
1	UEFB205-16														UE205-16		
1-1/8	UEFB206-18	123.60	5-3/8	2-1/16	1-7/8	1-1/4	1/2	1-1/4	25/64	3-1/4	2-3/4	1.675	1.567	3/8	UE206-18	FB206	2.72
1-3/16	UEFB206-19														UE206-19		
1-1/4	UEFB206-20														UE206-20		
1-1/4	UEFB207-20	155.20	6-1/8	2-3/8	2	1-1/4	1/2	1-7/16	33/64	3-3/4	3-1/4	1.867	1.728	1/2	UE207-20	FB207	3.23
1-3/8	UEFB207-22														UE207-22		
1-7/16	UEFB207-23														UE207-23		
1-1/2	UEFB208-24	159.50	6-15/32	2-3/8	1-31/32	1-5/8	5/8	1-13/32	15/32	3-15/16	3-1/16	2.056	1.976	7/16	UE208-24	FB208	3.83
1-11/16	UEFB209-27	177.40	6-27/32	2-9/16	2-1/8	1-11/16	23/32	1-1/2	15/32	4-3/16	3-5/32	2.087	1.976	7/16	UE209-27	FB209	5.29
1-3/4	UEFB209-28														UE209-28		
1-15/16	UEFB210-31	200.90	7-1/2	2-15/16	2-3/4	1-5/8	1/2	1-1/2	33/64	4-5/8	4	2.182	2.071	1/2	UE210-31	FB210	6.02
2	UEFB210-32														UE210-32		
Dimensions (mm)																	
20	UEFK204	85.40	110	42	32	27	13	25.5	10	62	52	35.3	33.0	M8	UE204	FK204	1.39
25	UEFK205	95.30	116	45	34	27	13	27	10	68	56	37.1	35.4		UE205	FK205	1.67
30	UEFK206	127.80	130	50	40	29	13	31	10	78	65	41.9	39.8		UE206	FK206	2.29
35	UEFK207	157.20	144	55	46	32	15	34	10	90	70	45.4	43.9	M8	UE207	FK207	3.23
40	UEFK208	163.60	164	60	50	41	16	36	12	100	78	52.2	50.2	M10	UE208	FK208	4.12
45	UEFK209	184.30	174	65	54	43	18	38	12	106	80	53.2	50.2	M10	UE209	FK209	4.63
50	UEFK210	208.00	184	68	58	46	18	40	12	112	86	55.6	52.6	M10	UE210	FK210	5.53

Lubrication fitting tap size for 1" and smaller shaft sizes, 1/4-28 UNF; for all other sizes, 1/8-27 NPT

INTERCHANGES: VFBB FB-DL KMFB-45 FB-T




ACCU-LOC® FOUR-BOLT FLANGE UNITS

UEF 200

NORMAL DUTY

Concentric Locking
52100 Bearing Steel
w/Black Oxide Finish
Cast Iron Housing
Insert detail-pg.133
Inch Sizes Only

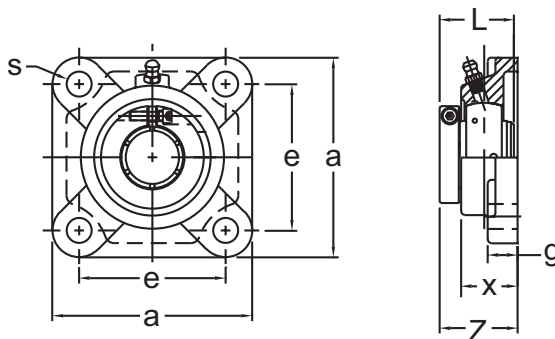



Shaft Diam. (in.)	AMI Unit #	List Price	Dimensions (in.)							Bolt Size (in.)	Bearing #	Housing #	Weight (lb.)
			a	e	g	x	s	Z	L				
3/4	UEF204-12	73.00	3-3/8	2-1/2	15/32	1	7/16	1.390	1.299	3/8	UE204-12	F204	1.46
7/8	UEF205-14	76.10	3-3/4	2-3/4	9/16	1-1/16	15/32	1.461	1.394	7/16	UE205-14	F205	2.01
15/16	UEF205-15										UE205-15		
1	UEF205-16										UE205-16		
1-1/8	UEF206-18	99.80	4-1/4	3-1/4	9/16	1-7/32	15/32	1.650	1.567	7/16	UE206-18	F206	2.64
1-3/16	UEF206-19										UE206-19		
1-1/4	UEF206-20										UE206-20		
1-1/4	UEF207-20	130.10	4-5/8	3-5/8	5/8	1-11/32	17/32	1.787	1.728	1/2	UE207-20	F207	3.64
1-3/8	UEF207-22										UE207-22		
1-7/16	UEF207-23										UE207-23		
1-1/2	UEF208-24	135.90	5-1/8	4	5/8	1-13/32	17/32	2.055	1.976	1/2	UEF208-24	F208	4.74
1-11/16	UEF209-27	153.40	5-3/8	4-1/8	23/32	1-1/2	19/32	2.094	1.976	9/16	UE209-27	F209	5.68
1-3/4	UEF209-28										UE209-28		
1-15/16	UEF210-31	172.50	5-5/8	4-3/8	23/32	1-9/16	19/32	2.189	2.071	9/16	UE210-31	F210	6.13
2	UEF210-32										UE210-32		
2	UEF211-32	200.70	6-3/8	5-1/8	25/32	1-11/16	21/32	2.338	2.228	5/8	UE211-32	F211	8.35
2-3/16	UEF211-35										UE211-35		
2-7/16	UEF212-39	239.60	6-7/8	5-5/8	25/32	1-7/8	21/32	2.764	2.622	5/8	UE212-39	F212	11.48
Dimensions (mm)													
20	UEF204	73.00	86	64	12	25.4	11	35.3	33.0	M10	UE204	F204	1.48
25	UEF205	76.40	95	70	14	27	12	37.1	35.4		UE205	F205	2.03
30	UEF206	101.30	108	83	14	31	12	41.9	39.8		UE206	F206	2.67
35	UEF207	129.30	117	92	16	34	13.5	45.4	43.9	M12	UE207	F207	3.68
40	UEF208	137.40	130	102	16	36	13.5	52.2	50.2	M12	UE208	F208	4.79
45	UEF209	157.60	137	105	18	38	15	53.2	50.2	M14	UE209	F209	5.74
50	UEF210	176.50	143	111	18	40	15	55.6	52.6	M14	UE210	F210	6.20
55	UEF211	221.90	162	130	20	43	17	59.4	56.6	M16	UE211	F211	8.44
60	UEF212	248.00	175	143	20	48	17	70.2	66.6	M16	UE212	F212	11.64

Lubrication fitting tap size for 1" and smaller shaft sizes, 1/4-28 UNF; for all other sizes, 1/8-27 NPT

INTERCHANGES: VF4B F4B-DL KFC4-45 SF-T



SealMaster® Style



Concentric Locking
52100 Bearing Steel
w/Black Oxide Finish
Cast Iron Housing
Insert detail-pg.133
Inch and Metric

Shaft Diam. (in.)	AMI Unit #	List Price	Dimensions (in.)										Bolt Size (in.)	Bearing #	Housing #	Weight (lb.)
			a	p	e	s	J	k	g	f	Z	L				
1-1/8	UEFCS206-18	111.80	4-3/8	3-5/8	2.559	3/8	1/4	23/64	15/16	3.000	1.335	1.567	5/16	UE206-18	FCSX05	2.44
1-3/16	UEFCS206-19													UE206-19		
1-1/4	UEFCS206-20													UE206-20		
1-1/4	UEFCS207-20	145.90												UE207-20	FCSX06	3.34
1-3/8	UEFCS207-22		5	4-1/8	2.921	15/32	3/8	25/64	7/8	3.375	1.354	1.728	3/8	UE207-22		
1-7/16	UEFCS207-23													UE207-23		
1-1/2	UEFCS208-24	160.20	5-1/4	4-3/8	3.091	15/32	7/16	7/16	1-1/32	3.625	1.582	1.976	7/16	UE208-24	FCSX07	3.93
1-11/16	UEFCS209-27	191.30	6-1/8	5-1/8	3.625	17/32	15/32	29/64	7/8	4.250	1.447	1.976	1/2	UE209-27	FCF209	4.15
1-3/4	UEFCS209-28													UE209-28		
1-15/16	UEFCS210-31	202.90	6-1/8	5-1/8	3.618	35/64	15/32	7/16	1	4.250	1.638	2.071	1/2	UE210-31	FCSX09	5.53
2	UEFCS210-32													UE210-32		
2	UEFCS211-32	240.70	6-3/8	5-3/8	3.800	35/64	5/8	7/16	1	4.500	1.630	2.228	1/2	UE211-32	FCSX10	6.38
2-3/16	UEFCS211-35													UE211-35		
2-7/16	UEFCS212-39	293.30	7-1/8	6	4.232	5/8	7/8	1/2	1-1/32	5.000	1.779	2.622	1/2	UE212-39	FCSX11	8.85
Dimensions (mm)																
30	UEFCS206	114.60	111	92	65	9.5	6.4	9	24	76.2	33.9	39.8	M8	UE206	FCSX05	2.44
35	UEFCS207	146.90	127	105	74.2	12	9.5	10	22	85.7	34.4	43.9	M10	UE207	FCSX06	3.34
40	UEFCS208	164.40	133	111	78.5	12	11	11	26	92.1	40.2	50.2	M10	UE208	FCSX07	3.93
45	UEFCS209	199.70	155	130	92.1	13.5	12	12	22	108.0	36.8	50.2	M12	UE209	FCF209	4.15
50	UEFCS210	210.30	155	130	91.9	14	12	11	25	108.0	41.6	52.6		UE210	FCSX09	5.53
55	UEFCS211	266.40	162	136.5	96.5	14	15.9	11	25	114.3	41.4	56.6		UE211	FCSX10	6.38
60	UEFCS212	307.60	181	152	107.5	16	22.2	13	26	127.0	45.2	66.6	M14	UE212	FCSX11	8.85

Lubrication fitting tap size 1/8-27 NPT

INTERCHANGES: VFCB FC-DL PFC445-1-14 SFC-T





ACCU-LOC® CARTRIDGE UNITS

UELC / UEC 200

NORMAL DUTY

Concentric Locking
52100 Bearing Steel
w/Black Oxide Finish
Cast Iron Housing
Insert detail-pg.133
Inch and Metric



Shaft Diam. (in.)	AMI Unit #	List Price	Dimensions (in.)			Bearing #	Housing #	Weight (lb.)
			a	x	L			
3/4	UELC204-12	93.50	2-15/16	7/8	1.299	UE204-12	LC204	1.44
7/8	UELC205-14	97.30	3-1/8	1-1/32	1.394	UE205-14	LC205	1.81
15/16	UELC205-15					UE205-15		
1	UELC205-16					UE205-16		
1-1/8	UELC206-18	130.70	3-1/2	1-3/32	1.567	UE206-18	LC206	2.31
1-3/16	UELC206-19					UE206-19		
1-1/4	UELC206-20					UE206-20		
1-1/4	UELC207-20	165.40	3-7/8	1-7/32	1.728	UE207-20	LC207	2.97
1-3/8	UELC207-22					UE207-22		
1-7/16	UELC207-23					UE207-23		
1-1/2	UELC208-24	168.00	4-3/16	1-15/32	1.976	UE208-24	LC208	4.07
1-11/16	UELC209-27	184.70	4-3/8	1-7/16	1.976	UE209-27	LC209	4.13
1-3/4	UELC209-28					UE209-28		
1-15/16	UELC210-31	221.30	4-9/16	1-15/32	2.071	UE210-31	LC210	4.80
2	UELC210-32					UE210-32		
2	UELC211-32	266.70	4-15/16	1-19/32	2.228	UE211-32	LC211	6.14
2-3/16	UELC211-35					UE211-35		
2-7/16	UELC212-39	338.00	5-7/8	1-5/8	2.622	UE212-39	LC212	9.70
Dimensions (mm)								
20	UEC204	95.80	72	20	33.0	UE204	C204	1.25
25	UEC205	100.00	80	22	35.4	UE205	C205	1.65
30	UEC206	135.60	85	27	39.8	UE206	C206	2.05
35	UEC207	168.60	90	28	43.9	UE207	C207	2.40
40	UEC208	173.00	100	30	50.2	UE208	C208	3.01
45	UEC209	192.30	110	31	50.2	UE209	C209	3.74
50	UEC210	230.70	120	33	52.6	UE210	C210	4.86
55	UEC211	295.30	125	35	56.6	UE211	C211	5.54
60	UEC212	357.30	130	38	66.6	UE212	C212	6.92



Recommended housing bore:

Rotating Shaft: nominal +0.001" - +0.003" (+0.025 mm - +0.076 mm).

Stationary Shaft: nominal +0.000" - -0.002" (+0.000 mm - -0.050 mm)

Lubrication fitting tap size 1/4-28 UNF

INTERCHANGES: SC-T

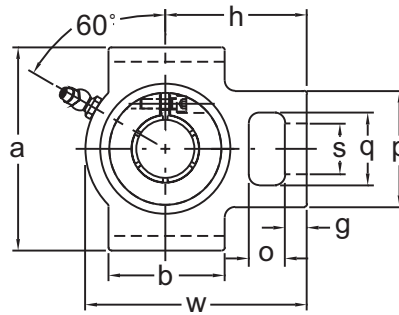

Concentric Locking
52100 Bearing Steel
w/Black Oxide Finish
Cast Iron Housing
Insert detail-pg.133
Inch and Metric

Shaft Diam. (in.)	AMI Unit #	List Price	Dimensions (in.)																Bearing #	Housing #	Weight (lb.)
			o	g	p	q	s	b	k	e	a	w	J	x	h	Z	L				
3/4	UEST204-12	77.90	5/8	3/8	2	1-1/4	3/4	2	17/32	3	3-1/2	3-11/16	1-1/4	15/16	2-3/8	1.268	1.299	UE204-12	ST204	2.01	
7/8	UEST205-14	85.90	5/8	3/8	2	1-1/4	7/8	2	17/32	3	3-1/2	3-13/16	1-1/4	15/16	2-7/16	1.300	1.394	UE205-14	ST205	1.96	
15/16	UEST205-15																	UE205-15			
1	UEST205-16																	UE205-16			
1-1/8	UEST206-18	112.00	5/8	3/8	2-3/16	1-7/16	7/8	2-1/4	17/32	3-1/2	4	4-7/16	1-7/16	15/16	2-3/4	1.410	1.567	UE206-18	ST206	2.64	
1-3/16	UEST206-19																	UE206-19			
1-1/4	UEST206-20																	UE206-20			
1-1/4	UEST207-20	148.60	5/8	1/2	2-1/2	1-7/16	7/8	2-1/2	17/32	3-1/2	4	5-1/16	1-7/16	1-3/16	3-1/16	1.633	1.728	UE207-20	ST207	3.86	
1-3/8	UEST207-22																	UE207-22			
1-7/16	UEST207-23																	UE207-23			
1-1/2	UEST208-24	156.50	3/4	5/8	3-1/4	1-15/16	1-1/8	3-1/4	11/16	4	4-1/2	5-11/16	1-15/16	1-3/8	3-1/2	1.916	1.976	UE208-24	ST208	5.84	
1-11/16	UEST209-27	179.80	3/4	5/8	3-1/4	1-15/16	1-1/8	3-1/4	11/16	4	4-5/8	5-11/16	1-15/16	1-3/8	3-7/16	1.916	1.976	UE209-27	ST209	5.68	
1-3/4	UEST209-28																	UE209-28			
1-15/16	UEST210-31	191.70	3/4	5/8	3-1/4	1-15/16	1-1/8	3-3/8	11/16	4	4-5/8	5-7/8	1-15/16	1-3/8	3-9/16	2.011	2.071	UE210-31	ST210	5.91	
2	UEST210-32																	UE210-32			
2	UEST211-32	221.90	1	3/4	4	2-1/2	1-3/8	3-3/4	1-1/16	5-1/8	5-3/4	6-3/4	2-1/2	1-5/8	4-3/16	2.167	2.228	UE211-32	ST211	9.90	
2-3/16	UEST211-35																	UE211-35			
2-7/16	UEST212-39	263.80	1-1/4	3/4	4	2-1/2	1-3/8	4	1-1/16	5-1/8	5-3/4	7-5/8	2-1/2	1-13/16	4-11/16	2.528	2.622	UE212-39	ST212	12.35	
Dimensions (mm)																					
20	UET204	78.50	16	10	51	32	19	51	12	76	89	94	32	21	61	30.8	33.0	UE204	T204	1.81	
25	UET205	87.30	16	10	51	32	19	51	12	76	89	97	32	24	62	33.1	35.4	UE205	T205	2.03	
30	UET206	114.80	16	10	56	37	22	57	12	89	102	113	37	28	70	37.9	39.8	UE206	T206	3.12	
35	UET207	149.90	16	13	64	37	22	64	12	89	102	129	37	30	78	41.4	43.9	UE207	T207	3.90	
40	UET208	160.20	19	16	83	49	29	83	16	102	114	144	49	33	88	47.7	50.2	UE208	T208	5.68	
45	UET209	186.90	19	16	83	49	29	83	16	102	117	144	49	35	87	48.7	50.2	UE209	T209	5.74	
50	UET210	197.80	19	16	83	49	29	86	16	102	117	149	49	37	90	52.1	52.6	UE210	T210	6.20	
55	UET211	245.50	25	19	102	64	35	95	22	130	146	171	64	38	106	53.4	56.6	UE211	T211	9.78	
60	UET212	274.90	32	19	102	64	35	102	22	130	146	194	64	42	119	62.2	66.6	UE212	T212	12.38	

Lubrication fitting tap size for 1" and smaller shaft sizes, 1/4-28 UNF; for all other sizes, 1/8-27 NPT

INTERCHANGES: WSTU-DL KTC-45 ST-T





ACCU-LOC® HANGER BEARING UNITS

UEECH 200

NORMAL DUTY

Concentric Locking
52100 Bearing Steel
w/Black Oxide Finish
Ductile Iron Housing
Insert detail-pg.133
Inch and Metric



Shaft Diam. (in.)	AMI Unit #	List Price	Dimensions (in.)								Bearing #	Housing #	Weight (lb.)
			a	w	h	J	s (BSP)	g	L	c			
3/4	UEECH204-12	94.70	2-3/4	3-7/8	2-1/2	1-9/16	3/4-14	3/4	1.299	0	UE204-12	ECH204	2.03
7/8	UEECH205-14	98.00	2-3/4	3-7/8	2-1/2	1-9/16	3/4-14	3/4	1.394	0	UE205-14	ECH205	1.83
15/16	UEECH205-15										UE205-15		
1	UEECH205-16										UE205-16		
1-1/8	UEECH206-18	127.90	3-1/8	4-1/8	2-1/2	1-9/16	3/4-14	3/4	1.567	0	UE206-18	ECH206	2.23
1-3/16	UEECH206-19										UE206-19		
1-1/4	UEECH206-20										UE206-20		
1-1/4	UEECH207-20	157.00	3-5/8	4-9/16	2-3/4	1-9/16	3/4-14	3/4	1.728	0	UE207-20	ECH207	2.97
1-3/8	UEECH207-22										UE207-22		
1-7/16	UEECH207-23										UE207-23		
1-1/2	UEECH208-24	159.30	3-3/4	4-3/4	2-7/8	1-9/16	3/4-14	3/4	1.976	0.079	UE208-24	ECH208	3.42
1-11/16	UEECH209-27	184.10	4-1/4	5-3/8	3-1/4	1-7/8	1-11	13/16	1.976	0.157	UE209-27	ECH209	4.36
1-3/4	UEECH209-28										UE209-28		
1-15/16	UEECH210-31	227.00	4-1/2	5-1/2	3-1/4	1-7/8	1-11	13/16	2.071	0.197	UE210-31	ECH210	4.81
2	UEECH210-32										UE210-32		
2	UEECH211-32	321.80	5-5/8	6-13/16	4	2-23/64	1-1/4-11	1-1/8	2.228	0.343	UE211-32	ECH211	9.61
2-3/16	UEECH211-35										UE211-35		
2-7/16	UEECH212-39	364.40	5-5/8	6-13/16	4	2-23/64	1-1/4-11	1-1/8	2.622	0.343	UE212-39	ECH212	13.14
Dimensions (mm)													
20	UEECH204	97.10	70	99	64	40	3/4-14	19	33.0	0	UE204	ECH204	2.03
25	UEECH205	100.70	70	99	64	40	3/4-14	19	35.4	0	UE205	ECH205	1.85
30	UEECH206	132.50	80	104	64	40	3/4-14	19	39.8	0	UE206	ECH206	2.25
35	UEECH207	159.20	92	116	70	40	3/4-14	19	43.9	0	UE207	ECH207	3.01
40	UEECH208	163.40	96	121	73	40	3/4-14	19	50.2	2.0	UE208	ECH208	3.45
45	UEECH209	191.70	108	136	82	48	1-11	21	50.2	4.0	UE209	ECH209	4.40
50	UEECH210	237.00	114	140	83	48	1-11	21	52.6	5.0	UE210	ECH210	4.86
55	UEECH211	356.50	143	173	101.6	60	1-1/4-11	28.5	56.6	8.7	UE211	ECH211	9.61
60	UEECH212	386.60	143	173	101.6	60	1-1/4-11	28.5	66.6	8.7	UE212	ECH212	13.14

Lubrication fitting tap size for 1" and smaller shaft sizes, 1/4-28 UNF; for all other sizes, 1/8-27 NPT



INTERCHANGES: SCHB-DL

UEPX 00

ACCU-LOC® PILLOW BLOCK UNITS



MEDIUM DUTY

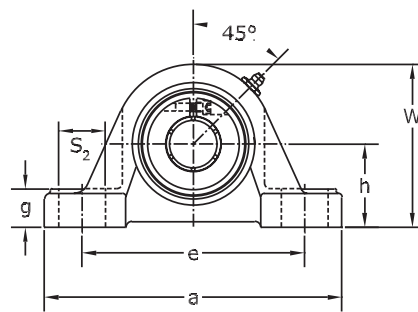

Concentric Locking
52100 Bearing Steel
w/Black Oxide Finish
Cast Iron Housing
Insert detail-pg.133
Inch Sizes Only



Shaft Diam. (in.)	AMI Unit #	List Price	Dimensions (in.)										Bolt Size	Bearing #	Housing #	Weight (lb.)
			h	a	e-min	e-max	b	s ₁	s ₂	g	w	L				
1	UEPX05-16	221.50	1-3/4	6-1/4	4-3/16	5-3/16	2	21/32	1	23/32	3-7/16	1-35/64	1/2	UEX05-16	PX05	3.82
1-3/16	UEPX06-19	259.85	1-7/8	6-7/8	4-1/2	5-1/2	2-1/4	21/32	1	25/32	3-13/16	1-3/4	1/2	UEX06-19	PX06	5.32
1-1/4	UEPX06-20										1-47/64			UE207-20		5.34
1-7/16	UEPX07-23	291.90	2-1/8	8	5	6-3/8	2-1/4	21/32	1-3/16	7/8	4-1/4	1-31/32	1/2	UEX07-23	PX07	6.36
1-1/2	UEPX08-24	319.90	2-5/16	8-3/4	5-1/2	6-3/4	2-5/8	25/32	1-1/4	1-1/32	4-17/32	1-31/32	5/8	UEX08-24	PX08	8.90
1-11/16	UEPX09-27	379.35	2-5/16	8-3/4	5-7/16	6-13/16	2-5/8	25/32	1-5/16	1-1/32	4-39/64	2-5/64	5/8	UEX09-27	PX09	8.91
1-3/4	UEPX09-28													UEX09-28		8.81
1-15/16	UEPX10-31	496.55	2-1/2	9-9/16	5-15/16	7-9/16	2-7/8	25/32	1-7/16	1-1/8	4-31/32	2-15/64	5/8	UEX10-31	PX10	11.59
2	UEPX10-32													UEX11-32		11.48
2-3/16	UEPX11-35	496.55	2-3/4	10-1/4	6-9/16	7-15/16	3-1/8	1	1-7/16	1-3/16	5-9/16	2-39/64	3/4	UEX11-35	PX11	14.29

Lubrication fitting tap size 1/8-27 NPT

INTERCHANGES: MP-T / VPB-3 / KC55

UEFLX 00

ACCU-LOC® TWO BOLT FLANGE UNIT

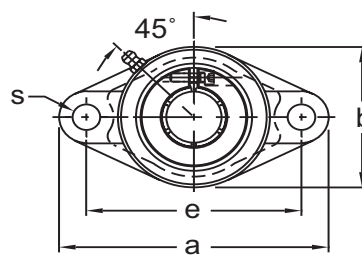

Shaft Diam. (in.)	AMI Unit #	List Price	Dimensions (in.)								Bolt Size	Bearing #	Housing #	Weight (lb.)
			a	e	g	x	s	b	Z	L				
1	UEFLX05-16	221.50	5-9/16	4-19/32	17/32	1-3/16	1/2	3-1/4	1-5/8	1-35/64	7/16	UEX05-16	FT206	2.10
1-3/16	UEFLX06-19	259.85	6-1/8	5-1/8	9/16	1-11/32	35/64	3-3/4	1-13/16	1-3/4	1/2	UEX06-19	FT207	3.10
1-1/4	UEFLX06-20								1-51/64			UE207-20		3.12
1-7/16	UEFLX07-23	291.90	6-3/4	5-21/32	9/16	1-1/2	35/64	4-1/8	2-1/16	1-31/32	1/2	UEX07-23	FT208	3.80
1-1/2	UEFLX08-24	319.90	7-1/16	5-27/32	9/16	1-9/16	5/8	4-3/8	2-3/32	1-31/32	9/16	UEX08-24	FT209	4.46
1-11/16	UEFLX09-27	379.35	7-7/16	6-3/16	9/16	1-9/16	5/8	4-9/16	2-13/64	2-5/64	9/16	UEX09-27	FT210	4.91
1-3/4	UEFLX09-28											UEX09-28		4.81
1-15/16	UEFLX10-31	427.50	8-1/2	7-1/4	13/16	1-3/4	21/32	5-1/4	2-23/64	2-15/64	5/8	UEX10-31	FT211	6.97
2	UEFLX10-32											UE211-32		6.86
2-3/16	UEFLX11-35	496.55	9-13/16	7-61/64	25/32	1-7/8	29/32	5-1/2	2-3/4	2-39/64	3/4	UEX11-35	FL212	9.33

Lubrication fitting tap size 1/8-27 NPT


INTERCHANGES: MSFT-T / VF2B-3 / F2B-SCM / KFC255



ACCU-LOC® 4 BOLT FLANGE UNIT

UEFX 00

Concentric Locking
52100 Bearing Steel
w/Black Oxide Finish
Cast Iron Housing
Insert detail-pg.133
Inch Sizes Only

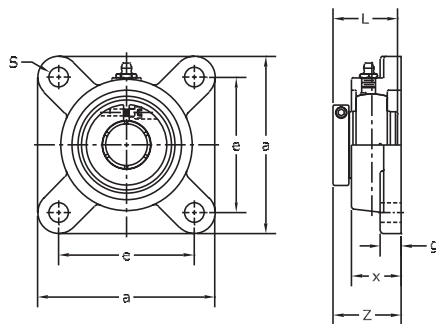

MEDIUM DUTY

Shaft Diam. (in.)	AMI Unit #	List Price	Dimensions (in.)							Bolt Size	Bearing #	Housing #	Weight (lb.)
			a	e	g	x	s	Z	L				
1	UEFX05-16	221.50	4-1/4	3-1/4	1/2	1-3/16	15/32	1-41/64	1-35/64	7/16	UEX05-16	FX05	2.90
1-3/16	UEFX06-19	259.85	4-5/8	3-5/8	9/16	1-11/32	17/32	1-13/16	1-3/4	1/2	UEX06-19	FX06	3.68
1-1/4	UEFX06-20										UE207-20		3.70
1-7/16	UEFX07-23	291.90	5-1/8	4	9/16	1-1/2	17/32	2-1/16	1-31/32	1/2	UEX07-23	FX07	4.76
1-1/2	UEFX08-24	319.90	5-3/8	4-1/8	9/16	1-9/16	19/32	2-3/32	1-31/32	9/16	UEX08-24	FX08	5.90
1-11/16	UEFX09-27	379.35	5-5/8	4-3/8	9/16	1-9/16	19/32	2-15/64	2-5/64	9/16	UEX09-27	FX09	6.79
1-3/4	UEFX09-28										UEX09-28		6.69
1-15/16	UEFX10-31	427.50	6-3/8	5-1/8	25/32	1-3/4	21/32	2-3/8	2-15/64	5/8	UEX10-31	FX10	9.23
2	UEFX10-32										UE211-32		9.12
2-3/16	UEFX11-35	496.55	6-7/8	5-5/8	25/32	1-15/16	21/32	2-3/4	2-39/64	5/8	UEX11-35	FX11	11.37


Lubrication fitting tap size 1/8-27 NPT

INTERCHANGES: MSF-T / VF4B-3 / F4B-SCM / KFC455



ACCU-LOC® PILOTED FLANGE CARTRIDGE UNITS

UEFCSX 00

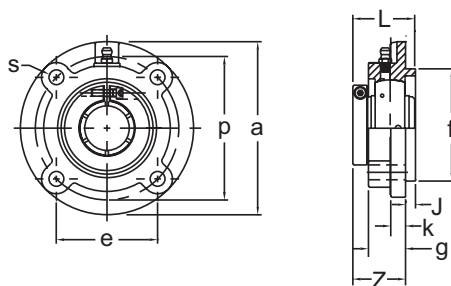

SealMaster® Style

Shaft Diam. (in.)	AMI Unit #	List Price	Dimensions (in.)									Bolt Size	Bearing #	Housing #	Weight (lb.)
			a	p	s	J	k	g	f	Z	L				
1	UEFCSX05-16	231.15	4-3/8	3-5/8	3/8	1/4	23/64	15/16	3	1-5/16	1-35/64	5/16	UEX05-16	FCSX05	2.56
1-3/16	UEFCSX06-19	274.40	5	4-1/8	15/32	3/8	25/64	7/8	3.375	1-3/8	1-3/4	3/8	UEX06-19	FCSX06	3.40
1-1/4	UEFCSX06-20												UE207-20		3.42
1-7/16	UEFCSX07-23	300.00	5-1/4	4-3/8	15/32	7/16	7/16	1-1/32	3.625	1-37/64	1-31/32	3/8	UEX07-23	FCSX07	4.34
1-1/2	UEFCSX08-24	333.85	5-1/4	4-3/8	15/32	7/16	7/16	1-1/32	3.625	1-37/64	1-31/32	3/8	UEX08-24	FCX08	4.22
1-1/2	UEFCMX08-24	333.85	6-1/8	5-1/8	17/32	15/32	29/64	7/8	4.250	1-29/64	1-31/32	1/2	UEX08-24	FCF209	5.68
1-11/16	UEFCSX09-27	383.60	6-1/8	5-1/8	35/64	15/32	7/16	1	4.250	1-41/64	2-5/64	1/2	UEX09-27	FCSX09	5.73
1-3/4	UEFCSX09-28												UEX09-28		5.63
1-15/16	UEFCSX10-31	459.40	6-3/8	5-3/8	35/64	5/8	7/16	1	4.500	1-5/8	2-15/64	1/2	UEX10-31	FCSX10	6.57
2	UEFCSX10-32												UE211-32		6.46
2-3/16	UEFCSX11-35	519.80	7-1/8	6	5/8	7/8	1/2	1-1/32	5.000	1-49/64	2-39/64	1/2	UEX11-35	FCSX11	9.15

Lubrication fitting tap size 1/8-27 NPT



INTERCHANGES: MFC-T / VFCB-3 / FC-DLM/ PFC455

UESTX 00

ACCU-LOC® WIDE SLOT TAKE-UP UNITS



MEDIUM DUTY

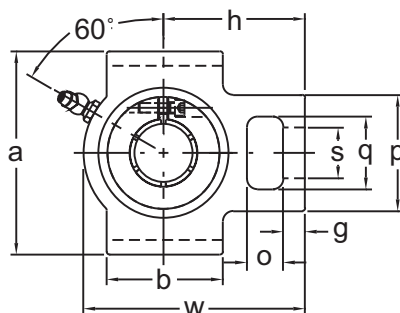

Concentric Locking
52100 Bearing Steel
w/Black Oxide Finish
Cast Iron Housing
Insert detail-pg.133
Inch Sizes Only



Shaft Diam. (in.)	AMI Unit #	List Price	Dimensions (in.)															Bearing #	Housing #	Weight (lb.)
			o	g	p	q	s	b	k	e	a	w	J	x	h	Z	L			
1	UESTX05-16	225.95	5/8	3/8	2 3/16	1-7/16	7/8	2-1/4	17/32	3-1/2	4	4-7/16	1-7/16	15/16	2-3/4	1-25/64	1-35/64	UEX05-16	ST206	2.58
1-3/16	UESTX06-19	269.90	5/8	1/2	2 1/2	1-7/16	7/8	2-1/2	17/32	3-1/2	4	5-1/16	1-7/16	1-3/16	3-1/16	1-21/32	1-3/4	UEX06-19	ST207	3.74
1-1/4	UESTX06-20																	UE207-20		3.76
1-7/16	UESTX07-23	299.75	3/4	5/8	3 1/4	1-15/16	1-1/8	3-1/4	11/16	4	4-1/2	5-11/16	1-15/16	1-3/8	3-1/2	1-29/32	1-31/32	UEX07-23	ST208	5.56
1-1/2	UESTX08-24	335.25	3/4	5/8	3 1/4	1-15/16	1-1/8	3-1/4	11/16	4	4-5/8	5-11/16	1-15/16	1-3/8	3-7/16	1-29/32	1-31/32	UEX08-24	ST209	5.60
1-11/16	UESTX09-27	366.90	3/4	5/8	3 1/4	1-15/16	1-1/8	3-3/8	11/16	4	4-5/8	5-7/8	1-15/16	1-3/8	3-9/16	2-1/64	2-5/64	UEX09-27	ST210	5.95
1-3/4	UESTX09-28																	UEX09-28		5.85
1-1/6	UESTX10-31	455.95	1	3/4	4	2-1/2	1-3/8	3-3/4	1-1/16	5-1/8	5-3/4	6-3/4	2-1/2	1-5/8	4-3/16	2-11/64	2-15/64	UEX10-31	ST211	9.25
2	UESTX10-32																	UE211-32		9.14
2-3/16	UESTX11-35	512.55	1-1/4	3/4	4	2-1/2	1-3/8	4	1-1/16	5-1/8	5-3/4	7-5/8	2-1/2	1-13/16	4-11/16	2-33/64	2-39/64	UEX11-35	ST212	11.29

Lubrication fitting tap size 1/8-27 NPT

INTERCHANGES: MST-T / WSTU-DLM

UELCX 00

ACCU-LOC® CARTRIDGE UNITS






Concentric Locking
52100 Bearing Steel
w/Black Oxide Finish
Cast Iron Housing
Insert detail-pg.133
Inch Sizes Only

Shaft Diam. (in.)	AMI Unit #	List Price	Dimensions (in.)			Bearing #	Housing #	Weight (lb.)
			A	X	L			
1	UELCX05-16	186.35	3-1/2	1-3/32	1-35/64	UEX05-16	LC206	2.22
1-3/16	UELCX06-19	228.70	3-7/8	1-7/32	1-3/4	UEX06-19	LC207	3.04
1-1/4	UELCX06-20				1-47/64	UE207-20		3.06
1-7/16	UELCX07-23	252.15	4-3/16	1-15/32	1-31/32	UEX07-23	LC208	3.80
1-1/2	UELCX08-24	278.45	4-3/8	1-7/16	1-31/32	UEX08-24	LC209	4.18
1-11/16	UELCX09-27	300.05	4-9/16	1-15/32	2-5/64	UEX09-27	LC210	4.67
1-3/4	UELCX09-28					UEX09-28		4.57
1-15/16	UELCX10-31	386.55	4-15/16	1-19/32	2-15/64	UEX10-31	LC211	5.63
2	UELCX10-32					UE211-32		5.52
2-3/16	UELCX11-35	475.70	5-7/8	1-5/8	2-39/64	UEX11-35	LC212	8.53





Lubrication fitting tap size 1/4-28 UNF



INTERCHANGES: MSC-T

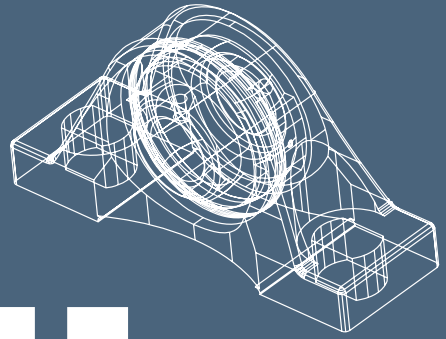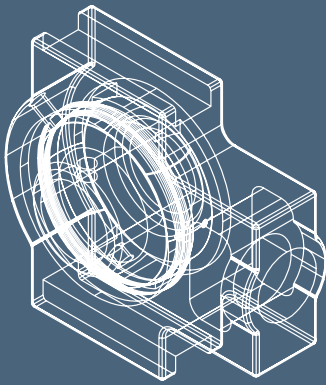

AMI

Medium Duty

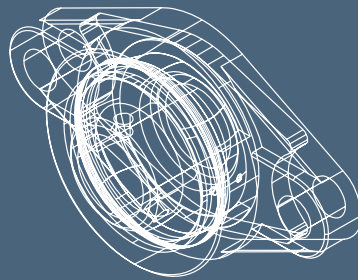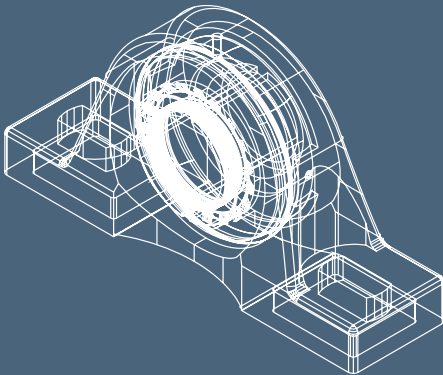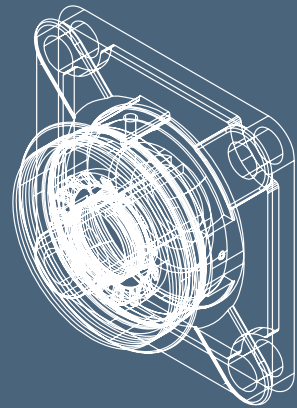

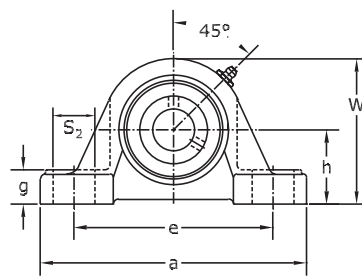

**Set-Screw Locking
Wide Inner Ring
Cast Iron Housing
Insert detail-pg.131
Inch and Metric**

Shaft Diam. (in.)	AMI Unit #	List Price	Dimensions (in.)										Bolt Size (in.)	Bearing #	Housing #	Weight (lb.)
			h	a	e		b	s ₁	s ₂	g	w	Bi				
					Min.	Max.										
1	UCPX05-16	87.00	1-3/4	6-1/4	4-3/16	5-3/16	2	21/32	1	23/32	3-7/16	1.500	1/2	UCX05-16	PX05	3.31
1-1/8	UCPX06-18	101.70	1-7/8	6-7/8	4-1/2	5-1/2	2-1/4	21/32	1	25/32	3-13/16	1.689	1/2	UCX06-18	PX06	4.19
1-3/16	UCPX06-19													UCX06-19		
1-1/4	UCPX06-20													UCX06-20		
1-1/4	UCPX07-20	127.00	2-1/8	8	5	6-3/8	2-1/4	21/32	1-3/16	7/8	4-1/4	1.937	1/2	UCX07-20	PX07	5.95
1-3/8	UCPX07-22													UCX07-22		
1-7/16	UCPX07-23													UCX07-23		
1-1/2	UCPX08-24	152.00	2-5/16	8-3/4	5-1/2	6-3/4	2-5/8	25/32	1-1/4	1-1/32	4-17/32	1.937	5/8	UCX08-24	PX08	7.71
1-5/8	UCPX09-26	164.10	2-5/16	8-3/4	5-7/16	6-13/16	2-5/8	25/32	1-5/16	1-1/32	4-39/64	2.031	5/8	UCX09-26	PX09	7.71
1-11/16	UCPX09-27													UCX09-27		
1-3/4	UCPX09-28													UCX09-28		
1-7/8	UCPX10-30	197.00	2-1/2	9-9/16	5-15/16	7-9/16	2-7/8	25/32	1-7/16	1-1/8	4-31/32	2.189	5/8	UCX10-30	PX10	9.26
1-15/16	UCPX10-31													UCX10-31		
2	UCPX10-32													UCX10-32		
2	UCPX11-32	263.00	2-3/4	10-1/4	6-9/16	7-15/16	3-1/8	1	1-7/16	1-3/16	5-9/16	2.563	3/4	UCX11-32	PX11	13.00
2-3/16	UCPX11-35													UCX11-35		
2-1/4	UCPX11-36													UCX11-36		
2-3/8	UCPX12-38	315.10	3	11-1/4	7-1/8	8-7/8	3-1/4	1	1-5/8	1-5/16	6-7/64	2.563	3/4	UCX12-38	PX12	15.87
2-7/16	UCPX12-39													UCX12-39		
2-1/2	UCPX13-40													UCX13-40		
2-11/16	UCPX14-43	426.60	3-1/2	13	7-7/8	10-1/8	3-1/2	1-1/16	2	1-5/16	6-57/64	3.063	7/8	UCX14-43	PX14	24.46
2-3/4	UCPX14-44													UCX14-44		
2-15/16	UCPX15-47													UCX15-47		
3	UCPX15-48	484.80	3-1/2	13	7-7/8	10-1/8	3-1/2	1-1/16	2	1-5/16	6-31/32	3.252	7/8	UCX15-48	PX15	25.13
3-3/16	UCPX16-51	655.70	4	15	9-11/16	12-9/16	4	1-1/16	2-5/16	1-21/32	8	3.374	7/8	UCX16-51	PX16	38.35
3-1/4	UCPX17-52	702.00	4	15	9-11/16	12-9/16	4-3/8	1-1/16	2-5/16	1-21/32	8-7/32	3.780	7/8	UCX17-52	PX17	37.69
3-7/16	UCPX17-55													UCX17-55		
3-1/2	UCPX18-56													UCX18-56		
3-15/16	UCPX20-63	1240.00	5	17	11-3/4	14-3/4	4-3/4	1-5/16	2-1/2	2-1/16	10	4.626	1	UCX20-63	PX20	72.73
4	UCPX20-64													UCX20-64		
Dimensions (mm)																
25	UCPX05	87.00	44.4	159	106	132	51	17	25	18	87	38.1	M14	UCX05	PX05	3.31
30	UCPX06	101.70	47.6	175	114	140	57	17	25	20	97	42.9		UCX06	PX06	4.19
35	UCPX07	127.00	54	203	127	162	57	17	30	22	108	49.2		UCX07	PX07	5.95
40	UCPX08	152.00	58.7	222	140	172	66	20	32	26	115	49.2	M16	UCX08	PX08	7.71
45	UCPX09	164.10	58.7	222	138	173	66	20	33	26	117	51.6		UCX09	PX09	7.71
50	UCPX10	197.00	63.5	243	151	192	74	20	36	29	126	55.6		UCX10	PX10	9.26
55	UCPX11	263.00	69.8	260	167	202	79	25	36	30	141	65.1	M20	UCX11	PX11	13.00
60	UCPX12	315.10	76.2	286	181	225	82	25	41	33	155	65.1		UCX12	PX12	15.87
65	UCPX13	360.20	76.2	286	181	225	82	21	41	33	155	74.6		UCX13	PX13	16.31
70	UCPX14	426.60	88.9	330	200	257	89	27	51	33	175	77.8	M22	UCX14	PX14	24.46
75	UCPX15	484.80	88.9	330	200	257	89	27	51	33	177	82.6		UCX15	PX15	25.13
80	UCPX16	655.70	101.6	381	246	319	102	27	59	42	203	85.7		UCX16	PX16	38.35
85	UCPX17	702.00	101.6	381	246	319	111	27	59	42	209	96	M22	UCX17	PX17	37.69
90	UCPX18	914.00	101.6	381	245	321	111	27	60	45	206	104	M22	UCX18	PX18	37.47
100	UCPX20	1240.00	127	432	299	375	121	33	64	52	254	117.5	M27	UCX20	PX20	72.73

Lubrication fitting tap size 1/8-27 NPT



INTERCHANGES: VPS-3 P2B-SCM YASM C-35 SYM-TF UCPX MP



PILLOW BLOCKS

UKPX 00+H

Tapered Adapter Sleeve
Wide Inner Ring
Cast Iron Housing
Insert detail-pg.132
Inch and Metric


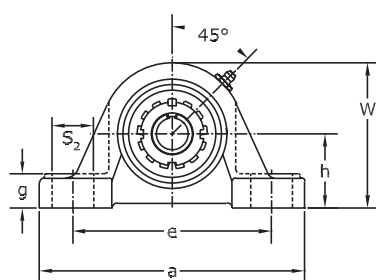


MEDIUM DUTY

Shaft Diam. (in.)	AMI Unit #	List Price	Dimensions (in.)										Bolt Size (in.)	Bearing #	Housing #	Weight (lb.)
			h	a	e		b	s ₁	s ₂	g	w	L				
					Min.	Max.										
3/4 13/16	UKPX05+HE2305 UKPX05+HA2305	119.40	1-3/4	6-1/4	4-3/16	5-3/16	2	21/32	1	23/32	3-7/16	1.378	1/2	UKX05+HE2305 UKX05+HA2305	PX05	3.35
7/8 15/16	UKPX06+HS2306 UKPX06+HA2306 UKPX06+HE2306	136.80	1-7/8	6-7/8	4-1/2	5-1/2	2-1/4	21/32	1	25/32	3-13/16	1.496	1/2	UKX06+HS2306 UKX06+HA2306 UKX06+HE2306	PX06	4.46
1-1/8 1-3/16	UKPX07+HS2307 UKPX07+HA2307	164.10	2-1/8	8	5	6-3/8	2-1/4	21/32	1-3/16	7/8	4-1/4	1.693	1/2	UKX07+HS2307 UKX07+HA2307	PX07	6.02
1-1/4 1-5/16	UKPX08+HE2308 UKPX08+HA2308 UKPX08+HS2308	192.05	2-5/16	8-3/4	5-1/2	6-3/4	2-5/8	25/32	1-1/4	1-1/32	4-17/32	1.811	5/8	UKX08+HE2308 UKX08+HA2308 UKX08+HS2308	PX08	7.81
1-7/16 1-1/2	UKPX09+HA2309 UKPX09+HE2309 UKPX09+HS2309	211.30	2-5/16	8-3/4	5-7/16	6-13/16	2-5/8	25/32	1-5/16	1-1/32	4-39/64	1.969	5/8	UKX09+HA2309 UKX09+HE2309 UKX09+HS2309	PX09	7.81
1-11/16 1-3/4	UKPX10+HA2310 UKPX10+HE2310	250.90	2-1/2	9-9/16	5-15/16	7-9/16	2-7/8	25/32	1-7/16	1-1/8	4-31/32	2.165	5/8	UKX10+HA2310 UKX10+HE2310	PX10	9.59
1-7/8 1-15/16	UKPX11+HS2311 UKPX11+HA2311 UKPX11+HE2311	323.65	2-3/4	10-1/4	6-9/16	7-15/16	3-1/8	1	1-7/16	1-3/16	5-9/16	2.323	3/4	UKX11+HS2311 UKX11+HA2311 UKX11+HE2311	PX11	13
2-1/16 2-1/8	UKPX12+HA2312 UKPX12+HS2312	382.50	3	11-1/4	7-1/8	8-7/8	3-1/4	1	1-5/8	1-5/16	6-7/64	2.441	3/4	UKX12+HA2312 UKX12+HS2312	PX12	15.9
2-3/16 2-1/4	UKPX13+HA2313 UKPX13+HE2313 UKPX13+HS2313	441.05	3	11-1/4	7-1/8	8-7/8	3-1/4	13/16	1-5/8	1-5/16	6-7/64	2.559	3/4	UKX13+HA2313 UKX13+HE2313 UKX13+HS2313	PX13	16.1
2-7/16 2-1/2	UKPX15+HA2315 UKPX15+HE2315	606.10	3-1/2	13	7-7/8	10-1/8	3-1/2	1-1/16	2	1-5/16	6-31/32	2.874	7/8	UKX15+HA2315 UKX15+HE2315	PX15	25.7
2-3/4	UKPX16+HE2316	790.45	4	15	9-11/16	12-9/16	4	1-1/16	2-5/16	1-21/32	8	3.071	7/8	UKX16+HE2316	PX16	38.8
2-15/16 3	UKPX17+HA2317 UKPX17+HE2317	850.25	4	15	9-11/16	12-9/16	4-3/8	1-1/16	2-5/16	1-21/32	8-7/32	3.228	7/8	UKX17+HA2317 UKX17+HE2317	PX17	38
3-1/8	UKPX18+HS2318	1102.65	4	15	9-5/8	12-5/8	4-3/8	1-1/16	2-3/8	1-25/32	8-1/8	3.836	7/8	UKX18+HS2318	PX18	37.3
3-7/16 3-1/2	UKPX20+HA2320 UKPX20+HE2320	1473.05	5	17	11-3/4	14-3/4	4-3/4	1-5/16	2-1/2	2-1/16	10	3.819	1	UKX20+HA2320 UKX20+HE2320	PX20	72.6
Dimensions (mm)																
20	UKPX05+H2305	119.40	44.4	159	106	132	51	17	25	18	87	35	M14	UKX05+H2305	PX05	3.35
25	UKPX06+H2306	136.80	47.6	175	114	140	57	17	25	20	97	38		UKX06+H2306	PX06	4.46
30	UKPX07+H2307	164.10	54	203	127	162	57	17	30	22	108	43		UKX07+H2307	PX07	6.02
35	UKPX08+H2308	192.45	58.7	222	140	172	66	20	32	26	115	46	M16	UKX08+H2308	PX08	7.81
40	UKPX09+H2309	211.30	58.7	222	138	173	66	20	33	26	117	50		UKX09+H2309	PX09	7.81
45	UKPX10+H2310	250.90	63.5	243	151	192	74	20	36	29	126	55		UKX10+H2310	PX10	9.59
50	UKPX11+H2311	323.65	69.8	260	167	202	79	25	36	30	141	59	M20	UKX11+H2311	PX11	13.0
55	UKPX12+H2312	382.50	76.2	286	181	225	82	25	41	33	155	62		UKX12+H2312	PX12	15.9
60	UKPX13+H2313	441.05	76.2	286	181	225	82	21	41	33	155	65		UKX13+H2313	PX13	16.1
65	UKPX15+H2315	606.10	88.9	330	200	257	89	27	51	33	177	73	M22	UKX15+H2315	PX15	25.7
70	UKPX16+H2316	790.45	101.6	381	246	319	102	27	59	42	203	78		UKX16+H2316	PX16	38.8
75	UKPX17+H2317	850.25	101.6	381	246	319	111	27	59	42	209	82		UKX17+H2317	PX17	38.0
80	UKPX18+H2318	1102.65	101.6	381	245	321	111	27	60	45	206	86	M22	UKX18+H2318	PX18	37.3
90	UKPX20+H2320	1473.05	127	432	299	375	121	33	64	52	254	97		UKX20+H2320	PX20	69.4

Lubrication fitting tap size 1/8-27 NPT

INTERCHANGES: UKPX

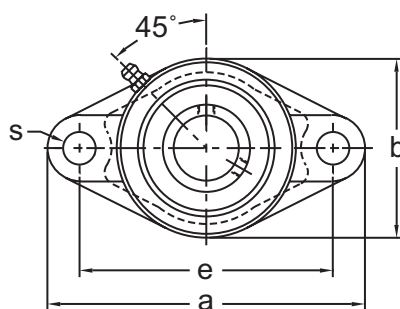

Set-Screw Locking
Wide Inner Ring
Cast Iron Housing
Insert detail-pg.131
Inch and Metric

Shaft Diam. (in.)	AMI Unit #	List Price	Dimensions (in.)								Bolt Size (in.)	Bearing #	Housing #	Weight (lb.)
			a	e	g	x	s	b	z	Bi				
1	UCFLX05-16	87.00	5-9/16	4-19/32	17/32	1-3/16	1/2	3-1/4	1.579	1.500	7/16	UCX05-16	FT206	2.20
1-1/8	UCFLX06-18	101.70	6-1/8	5-1/8	9/16	1-11/32	35/64	3-3/4	1.752	1.689	1/2	UCX06-18	FT207	3.09
1-3/16	UCFLX06-19											UCX06-19		
1-1/4	UCFLX06-20											UCX06-20		
1-1/4	UCFLX07-20	127.00	6-3/4	5-21/32	9/16	1-1/2	35/64	4-1/8	2.016	1.937	1/2	UCX07-20	FT208	4.19
1-3/8	UCFLX07-22											UCX07-22		
1-7/16	UCFLX07-23											UCX07-23		
1-1/2	UCFLX08-24	152.00	7-1/16	5-27/32	9/16	1-9/16	5/8	4-3/8	2.047	1.937	9/16	UCX08-24	FT209	4.41
1-5/8	UCFLX09-26	164.10	7-7/16	6-3/16	9/16	1-9/16	5/8	4-9/16	2.157	2.031	9/16	UCX09-26	FT210	5.29
1-11/16	UCFLX09-27											UCX09-27		
1-3/4	UCFLX09-28											UCX09-28		
1-7/8	UCFLX10-30	197.00	8-1/2	7-1/4	13/16	1-3/4	21/32	5-1/4	2.315	2.189	5/8	UCX10-30	FT211	7.93
1-15/16	UCFLX10-31											UCX10-31		
2	UCFLX10-32											UCX10-32		
Dimensions (mm)														
25	UCFLX05	87.00	141	116.7	13	30	12.5	83	40.1	38.1	M10	UCX05	FT206	2.23
30	UCFLX06	101.70	156	130.2	14	34	14	95	44.5	42.9	M12	UCX06	FT207	3.12
35	UCFLX07	127.00	171	143.7	14	38	14	105	51.2	49.2	M12	UCX07	FT208	4.24
40	UCFLX08	152.00	179	148.4	14	40	16	111	52.0	49.2	M14	UCX08	FT209	4.46
45	UCFLX09	164.10	189	157.2	14	40	16	116	54.8	51.6	M14	UCX09	FT210	5.35
50	UCFLX10	197.00	216	184.2	21	44	17	133	58.8	55.6	M16	UCX10	FT211	8.03

Lubrication fitting tap size 1/8-27 NPT



INTERCHANGES: VF2S-3 F2B-SCM YCJTM FC2-35 FYTM-TF UCFLX MSFT



FOUR-BOLT FLANGE UNITS

UCFX 00

Set-Screw Locking
Wide Inner Ring
Cast Iron Housing
Insert detail-pg.131
Inch and Metric



MEDIUM DUTY



Shaft Diam. (in.)	AMI Unit #	List Price	Dimensions (in.)							Bolt Size (in.)	Bearing #	Housing #	Weight (lb.)
			a	e	g	x	s	Z	Bi				
1	UCFX05-16	87.00	4-1/4	3-1/4	1/2	1-3/16	15/32	1.583	1.500	7/16	UCX05-16	FX05	2.42
1-1/8	UCFX06-18	101.70	4-5/8	3-5/8	9/16	1-11/32	17/32	1.748	1.689	1/2	UCX06-18	FX06	2.87
1-3/16	UCFX06-19										UCX06-19		
1-1/4	UCFX06-20										UCX06-20		
1-1/4	UCFX07-20										UCX07-20		
1-3/8	UCFX07-22	127.00	5-1/8	4	9/16	1-1/2	17/32	2.016	1.937	1/2	UCX07-22	FX07	3.97
1-7/16	UCFX07-23										UCX07-23		
1-1/2	UCFX08-24										UCX08-24		
1-5/8	UCFX09-26										UCX09-26		
1-11/16	UCFX09-27	164.10	5-5/8	4-3/8	9/16	1-9/16	19/32	2.189	2.031	9/16	UCX09-27	FX09	5.29
1-3/4	UCFX09-28										UCX09-28		
1-7/8	UCFX10-30										UCX10-30		
1-15/16	UCFX10-31										UCX10-31		
2	UCFX10-32	197.00	6-3/8	5-1/8	25/32	1-3/4	21/32	2.339	2.189	5/8	UCX10-32	FX10	7.93
2	UCFX11-32										UCX11-32		
2-3/16	UCFX11-35										UCX11-35		
2-1/4	UCFX11-36										UCX11-36		
2-3/8	UCFX12-38	315.10	7-3/8	5-7/8	13/16	2-5/16	21/32	2.902	2.563	5/8	UCX12-38	FX12	11.68
2-7/16	UCFX12-39										UCX12-39		
2-1/2	UCFX13-40										UCX13-40		
2-11/16	UCFX14-43										UCX14-43		
2-3/4	UCFX14-44	426.60	7-3/4	6	15/16	2-3/8	25/32	3.209	3.063	3/4	UCX14-44	FX14	16.97
2-15/16	UCFX15-47										UCX15-47		
3	UCFX15-48										UCX15-48		
3-3/16	UCFX16-51										UCX16-51		
3-1/4	UCFX17-52	702.00	8-7/16	6-3/4	15/16	2-3/4	25/32	3.791	3.780	3/4	UCX17-52	FX17	22.48
3-7/16	UCFX17-55										UCX17-55		
3-1/2	UCFX18-56										UCX18-56		
3-15/16	UCFX20-63										UCX20-63		
4	UCFX20-64	1240.00	10-9/16	8-5/16	1-7/32	3-13/16	1-1/32	5.012	4.626	1	UCX20-64	FX20	37.03
Dimensions (mm)													
25	UCFX05	87.00	108	83	13	30	12	40.2	38.1	M10	UCX05	FX05	2.42
30	UCFX06	101.70	117	92	14	34	13.5	44.4	42.9	M12	UCX06	FX06	2.87
35	UCFX07	127.00	130	102	14	38	13.5	51.2	49.2	M12	UCX07	FX07	3.97
40	UCFX08	152.00	137	105	14	40	15	52.2	49.2	M14	UCX08	FX08	3.97
45	UCFX09	164.10	143	111	14	40	15	55.6	51.6	M14	UCX09	FX09	5.29
50	UCFX10	197.00	162	130	20	44	17	59.4	55.6	M16	UCX10	FX10	7.93
55	UCFX11	263.00	175	143	20	49	17	68.7	65.1	M16	UCX11	FX11	9.92
60	UCFX12	315.10	187	149	21	59	17	73.7	65.1		UCX12	FX12	11.68
65	UCFX13	360.20	187	149	21	59	17	78.4	74.6		UCX13	FX13	12.12
70	UCFX14	426.60	197	152	24	60	20	81.5	77.8		UCX14	FX14	16.97
75	UCFX15	484.80	197	152	24	68	20	89.3	82.6	M18	UCX15	FX15	16.97
80	UCFX16	655.70	214	171	24	70	20	91.6	85.7		UCX16	FX16	22.48
85	UCFX17	702.00	214	171	24	70	20	96.3	96		UCX17	FX17	22.48
90	UCFX18	914.00	214	171	24	76	20	106.1	104		UCX18	FX18	23.36
100	UCFX20	1240.00	268	211	31	97	26	127.3	117.5	M24	UCX20	FX20	37.03

Lubrication fitting tap size 1/8-27 NPT

INTERCHANGES: VF4S-3 F4B-SCM TCJM FC4-35 FYM-TF UCFX MSF



Tapered Adapter Sleeve
Wide Inner Ring
Cast Iron Housing
Insert detail-pg.132
Inch and Metric



MEDIUM DUTY

Shaft Diam. (in.)	AMI Unit #	List Price	Dimensions (in.)							Bolt Size (in.)	Bearing #	Housing #	Weight (lb.)
			a	e	g	x	s	Z	L				
3/4 13/16	UKFX05+HE2305 UKFX05+HA2305	119.40	4-1/4	3-1/4	1/2	1-3/16	15/32	1.535	1.378	7/16	UKX05+HE2305 UKX05+HA2305	FX05	2.45
7/8 15/16	UKFX06+HS2306 UKFX06+HA2306 UKFX06+HE2306	136.80	4-5/8	3-5/8	9/16	1-11/32	17/32	1.614	1.496	1/2	UKX06+HS2306 UKX06+HA2306 UKX06+HE2306	FX06	3.12
1-1/8 1-3/16	UKFX07+HS2307 UKFX07+HA2307	164.10	5-1/8	4	9/16	1-1/2	17/32	1.752	1.693	1/2	UKX07+HS2307 UKX07+HA2307	FX07	4.01
1-1/4 1-5/16	UKFX08+HE2308 UKFX08+HA2308 UKFX08+HS2308	192.45	5-3/8	4-1/8	9/16	1-9/16	19/32	1.851	1.811	9/16	UKX08+HE2308 UKX08+HA2308 UKX08+HS2308	FX08	4.01
1-7/16 1-1/2	UKFX09+HA2309 UKFX09+HE2309 UKFX09+HS2309	211.30	5-5/8	4-3/8	9/16	1-9/16	19/32	1.949	1.969	9/16	UKX09+HA2309 UKX09+HE2309 UKX09+HS2309	FX09	5.35
1-11/16 1-3/4	UKFX10+HA2310 UKFX10+HE2310	250.90	6-3/8	5-1/8	25/32	1-3/4	21/32	2.146	2.165	5/8	UKX10+HA2310 UKX10+HE2310	FX10	8.03
1-7/8 1-15/16	UKFX11+HS2311 UKFX11+HA2311 UKFX11+HE2311	323.65	6-7/8	5-5/8	25/32	1-15/16	21/32	2.323	2.323	5/8	UKX11+HS2311 UKX11+HA2311 UKX11+HE2311	FX11	9.59
2-1/16 2-1/8	UKFX12+HA2312 UKFX12+HS2312	382.50	7-3/8	5-7/8	13/16	2-5/16	21/32	2.598	2.441	5/8	UKX12+HA2312 UKX12+HS2312	FX12	11.8
2-3/16 2-1/4	UKFX13+HA2313 UKFX13+HE2313 UKFX13+HS2313	441.05	7-3/8	5-7/8	13/16	2-5/16	21/32	2.677	2.559	5/8	UKX13+HA2313 UKX13+HE2313 UKX13+HS2313	FX13	11.6
2-7/16 2-1/2	UKFX15+HA2315 UKFX15+HE2315	606.10	7-3/4	6	15/16	2-11/16	25/32	3.032	2.874	3/4	UKX15+HA2315 UKX15+HE2315	FX15	17.2
2-3/4	UKFX16+HE2316	790.45	8-7/16	6-3/4	15/16	2-3/4	25/32	3.150	3.071	3/4	UKX16+HE2316	FX16	22.8
2-15/16 3	UKFX17+HA2317 UKFX17+HE2317	850.25	8-7/16	6-3/4	15/16	2-3/4	25/32	3.248	3.228	3/4	UKX17+HA2317 UKX17+HE2317	FX17	22.6
3-1/8	UKFX18+HS2318	1102.65	8-7/16	6-3/4	15/16	3	25/32	3.504	3.386	3/4	UKX18+HS2318	FX18	22.8
3-7/16 3-1/2	UKFX20+HA2320 UKFX20+HE2320	1473.05	10-9/16	8-5/16	1-7/32	3-13/16	1-1/32	4.252	3.819	1	UKX20+HA2320 UKX20+HE2320	FX20	36.5
Dimensions (mm)													
20	UKFX05+H2305	119.40	108	83	13	30	12	39	35	M10	UKX05+H2305	FX05	2.45
25	UKFX06+H2306	136.80	117	92	14	34	13.5	40.5	38	M12	UKX06+H2306	FX06	3.12
30	UKFX07+H2307	164.10	130	102	14	38	13.5	44.5	43	M12	UKX07+H2307	FX07	4.01
35	UKFX08+H2308	192.45	137	105	14	40	15	47	46	M14	UKX08+H2308	FX08	4.01
40	UKFX09+H2309	211.30	143	111	14	40	15	49.5	50	M14	UKX09+H2309	FX09	5.35
45	UKFX10+H2310	250.90	162	130	20	44	17	54.5	55	M16	UKX10+H2310	FX10	8.03
50	UKFX11+H2311	323.65	175	143	20	49	17	59	59	M16	UKX11+H2311	FX11	9.59
55	UKFX12+H2312	382.50	187	149	21	59	17	66	62		UKX12+H2312	FX12	11.8
60	UKFX13+H2313	441.05	187	149	21	59	17	68	65		UKX13+H2313	FX13	11.6
65	UKFX15+H2315	606.10	197	152	24	68	20	77	73	M18	UKX15+H2315	FX15	17.2
70	UKFX16+H2316	790.45	214	171	24	70	20	80	78		UKX16+H2316	FX16	22.8
75	UKFX17+H2317	850.25	214	171	24	70	20	82.5	82		UKX17+H2317	FX17	22.6
80	UKFX18+H2318	1102.65	214	171	24	76	20	89	86	M18	UKX18+H2318	FX18	22.8
90	UKFX20+H2320	1473.05	268	211	31	97	26	108	97	M24	UKX20+H2320	FX20	35.5

Lubrication fitting tap size 1/8-27 NPT



INTERCHANGES: UKFX



PILOTED FLANGE CARTRIDGE UNITS

UCFCSX / UCFCX 00

**Set-Screw Locking
Wide Inner Ring
Cast Iron Housing
Insert detail-pg.131
Inch and Metric**





MEDIUM DUTY

Shaft Diam. (in.)	AMI Unit #	List Price	Dimensions (in.)										Bolt Size (in.)	Bearing #	Housing #	Weight (lb.)
			a	p	e	s	J	k	g	f	z	Bi				
1	UCFCSX05-16	87.45	4-3/8	3-5/8	2.559	3/8	1/4	23/64	15/16	3.000	1.268	1.500	5/16	UCX05-16	FCSX05	2.42
1-1/8	UCFCSX06-18	103.65	5	4-1/8	2.921	15/32	3/8	25/64	7/8	3.375	1.315	1.689	3/8	UCX06-18	FCSX06	3.09
1-3/16	UCFCSX06-19													UCX06-19		
1-1/4	UCFCSX06-20													UCX06-20		
1-1/4	UCFCSX07-20	134.10	5-1/4	4-3/8	3.091	15/32	7/16	7/16	1-1/32	3.625	1.543	1.937	3/8	UCX07-20	FCSX07	3.97
1-3/8	UCFCSX07-22													UCX07-22		
1-7/16	UCFCSX07-23													UCX07-23		
1-1/2	UCFCSX08-24	166.25	5-1/4	4-3/8	3.091	15/32	7/16	7/16	1-1/32	3.625	1.543	1.937	3/8	UCX08-24	FCX08	3.97
1-1/2	UCFCMX08-24	166.25	6-1/8	5-1/8	3.625	17/32	15/32	29/64	7/8	4.250	1.408	1.937	1/2	UCX08-24	FCF209	3.97
1-5/8	UCFCSX09-26	180.85	6-1/8	5-1/8	3.618	35/64	15/32	7/16	1	4.250	1.598	2.031	1/2	UCX09-26	FCSX09	5.51
1-11/16	UCFCSX09-27													UCX09-27		
1-3/4	UCFCSX09-28													UCX09-28		
1-7/8	UCFCSX10-30	208.35	6-3/8	5-3/8	3.800	35/64	5/8	7/16	1	4.500	1.591	2.189	1/2	UCX10-30	FCSX10	6.39
1-15/16	UCFCSX10-31													UCX10-31		
2	UCFCSX10-32													UCX10-32		
2	UCFCSX11-32	262.85	7-1/8	6	4.232	5/8	7/8	1/2	1-1/32	5.000	1.720	2.563	1/2	UCX11-32	FCSX11	8.82
2-3/16	UCFCSX11-35													UCX11-35		
2-1/4	UCFCSX11-36													UCX11-36		
2-3/8	UCFCSX12-38	323.10	7-5/8	6-1/2	4.594	5/8	25/32	9/16	1-5/16	5.500	1.996	2.563	1/2	UCX12-38	FCSX12	10.14
2-7/16	UCFCSX12-39													UCX12-39		
2-1/2	UCFCSX13-40	380.75	7-5/8	6-1/2	4.594	5/8	25/32	9/16	1-5/16	5.500	2.181	2.937	1/2	UCX13-40	FCSX13	10.80
2-11/16	UCFCSX14-43	459.75	8-3/4	7-1/2	5.303	3/4	25/32	9/16	1-13/32	6.375	2.303	3.063	5/8	UCX14-43	FCSX14	16.31
2-3/4	UCFCSX14-44													UCX14-44		
2-15/16	UCFCSX15-47													UCX15-47		
3	UCFCSX15-48	508.20	8-3/4	7-1/2	5.303	3/4	7/8	5/8	1-3/8	6.375	2.413	3.252	5/8	UCX15-48	FCSX15	16.31
3-3/16	UCFCSX16-51	693.05	10-1/4	8-5/8	6.094	29/32	1	3/4	1-13/32	7.323	2.425	3.374	3/4	UCX16-51	FCSX16	25.35
3-1/4	UCFCSX17-52	741.85	10-1/4	8-5/8	6.094	29/32	1	3/4	1-13/32	7.375	2.610	3.780	3/4	UCX17-52	FCSX17	24.46
3-7/16	UCFCSX17-55													UCX17-55		
3-1/2	UCFCSX18-56													UCX18-56		
3-15/16	UCFCSX20-63	1309.55	10-7/8	9-3/8	6.626	29/32	1-3/32	7/8	2-19/32	8.125	3.555	4.626	3/4	UCX20-63	FCSX20	35.04
4	UCFCSX20-64													UCX20-64		
Dimensions (mm)																
25	UCFCX05	87.45	111	92	65	9.5	6	9.5	24	76	32.2	38.1	M8	UCX05	FCX05	2.45
30	UCFCX06	103.65	127	105	74.2	12	9.5	9.5	22.5	85	33.4	42.9	M10	UCX06	FCX06	3.12
35	UCFCX07	134.10	133	111	78.5	12	11	11	26	92	39.2	49.2	M10	UCX07	FCX07	4.01
40	UCFCX08	166.25	133	111	78.5	12	11	11	26	92	39.2	49.2	M10	UCX08	FCX08	4.01
45	UCFCX09	180.85	155	130	91.9	14	12	11	25	108	40.6	51.6	M12	UCX09	FCX09	5.58
50	UCFCX10	208.35	162	136	96.2	14	16	11	25	118	40.4	55.6	M12	UCX10	FCX10	6.47
55	UCFCX11	262.85	180	152	107.5	16	22	13	26	127	43.7	65.1	M14	UCX11	FCX11	8.92
60	UCFCX12	323.10	194	165	116.7	16	20	14	33	140	50.7	65.1		UCX12	FCX12	10.3
65	UCFCX13	380.75	194	165	116.7	16	20	14	33	140	55.4	74.6		UCX13	FCX13	11.0
70	UCFCX14	459.75	222	190	134.3	19	20	14	36	164	58.5	77.8	M16	UCX14	FCX14	16.5
75	UCFCX15	508.20	222	190	134.3	19	22	16	35	164	61.3	82.6	M16	UCX15	FCX15	16.5
80	UCFCX16	693.05	260	219	154.8	23	25	19	36	186	61.6	85.7	M20	UCX16	FCX16	25.7
85	UCFCX17	741.85	260	219	154.8	23	25	19	36	186	66.3	96	M20	UCX17	FCX17	24.8
90	UCFCX18	963.75	260	219	154.8	23	28	19	43	186	73.1	104		UCX18	FCX18	25.2
100	UCFCX20	1309.55	276	238	168.3	23	28	22	66	206	90.3	117.5		UCX20	FCX20	35.5

Lubrication fitting tap size 1/8-27 NPT

INTERCHANGES: VFCS-3 FC-SCM MFC PFC4-35 UCFCX



Set-Screw Locking
Wide Inner Ring
Cast Iron Housing
Insert Detail-pg.121-122
Inch Sizes
Metric Sizes Available



Shaft Diam. (in.)	AMI Unit #	List Price	Dimensions (in.)			Bearing #	Housing #	Weight (lb.)
			A	X	Bi			
1	UCLCX05-16	112.75	3-1/2	1-3/32	1.500	UCX05-16	LC206	2.12
1-1/8	UCLCX06-18	121.15	3-7/8	1-7/32	1.689	UCX06-18	LC207	2.92
1-3/16	UCLCX06-19					UCX06-19		2.88
1-1/4	UCLCX06-20					UCX06-20		2.84
1-1/4	UCLCX07-20	148.20	4-3/16	1-15/32	1.937	UCX07-20	LC208	3.84
1-3/8	UCLCX07-22					UCX07-22		3.68
1-7/16	UCLCX07-23					UCX07-23		3.64
1-1/2	UCLCX08-24	162.65	4-3/8	1-7/16	1.937	UCX08-24	LC209	4.00
1-5/8	UCLCX09-26	187.65	4-9/16	1-15/32	2.031	UCX09-26	LC210	4.56
1-11/16	UCLCX09-27					UCX09-27		4.44
1-3/4	UCLCX09-28					UCX09-28		4.32
1-7/8	UCLCX10-30	233.15	4-15/16	1-19/32	2.189	UCX10-30	LC211	5.44
1-15/16	UCLCX10-31					UCX10-31		5.32
2	UCLCX10-32					UCX10-32		5.24
2	UCLCX11-32	331.00	5-7/8	1-5/8	2.563	UCX11-32	LC212	8.56
2-3/16	UCLCX11-35					UCX11-35		8.12

Lubrication fitting tap size 1/4-28 UNF

INTERCHANGES: MSC



Set-Screw Locking
Wide Inner Ring
Cast Iron Housing
Insert Detail-pg.131
Inch Sizes
Metric Sizes Available

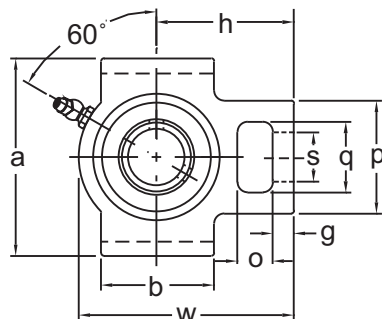

MEDIUM DUTY



Shaft Diam. (in.)	AMI Unit #	List Price	Dimensions (in.)														Bearing #	Housing #	Weight (lb.)
			g	p	q	s	b	k	e	a	w	J	x	h	Z	Bi			
1	UCSTX05-16	87.00	3/8	2-3/16	1-7/16	7/8	2-1/4	17/32	3-1/2	4	4-7/16	1-7/16	15/16	2-3/4	1-11/32	1.500	UCX05-16	ST206	2.48
1-1/8	UCSTX06-18	101.70	1/2	2-1/2	1-7/16	7/8	2-1/2	17/32	3-1/2	4	5-1/16	1-7/16	1-3/16	3-1/16	1-19/32	1.689	UCX06-18	ST207	3.62
1-3/16	UCSTX06-19																UCX06-19		3.58
1-1/4	UCSTX06-20																UCX06-20		3.54
1-1/4	UCSTX07-20																UCX07-20		5.60
1-3/8	UCSTX07-22	119.85	5/8	3-1/4	1-15/16	1-1/8	3-1/4	11/16	4	4-1/2	5-11/16	1-15/16	1-3/8	3-1/2	1-7/8	1.937	UCX07-22	ST208	5.44
1-7/16	UCSTX07-23	131.90	5/8	3-1/4	1-15/16	1-1/8	3-1/4	11/16	4	4-5/8	5-11/16	1-15/16	1-3/8	3-7/16	1-7/8	1.937	UCX07-23		5.40
1-1/2	UCSTX08-24																UCX08-24	ST209	5.42
1-5/8	UCSTX09-26																UCX09-26		5.84
1-11/16	UCSTX09-27																UCX09-27	ST210	5.72
1-3/4	UCSTX09-28	153.40	5/8	3-1/4	1-15/16	1-1/8	3-3/8	11/16	4	4-5/8	5-7/8	1-15/16	1-3/8	3-9/16	1-31/32	2.031	UCX09-28		5.60
1-7/8	UCSTX10-30																UCX10-30		9.06
1-15/16	UCSTX10-31																UCX10-31		8.94
2	UCSTX10-32	187.30	3/4	4	2-1/2	1-3/8	3-3/4	1-1/16	5-1/8	5-3/4	6-3/4	2-1/2	1-5/8	4-3/16	2-1/8	2.189	UCX10-32	ST211	8.86
2	UCSTX11-32	248.85	3/4	4	2-1/2	1-3/8	4	1-1/16	5-1/8	5-3/4	7-5/8	2-1/2	1-13/16	4-11/16	2-15/32	2.563	UCX11-32		11.32
2-3/16	UCSTX11-35																UCX11-35		10.88
2-1/4	UCSTX11-36																UCX11-36		10.72

Lubrication fitting tap size 1/8-27 NPT

INTERCHANGES: MST / VTWS-3 / WSTU-SCM



**Set-Screw Locking
Wide Inner Ring
Cast Iron Housing
Insert detail-pg.131
Inch and Metric**

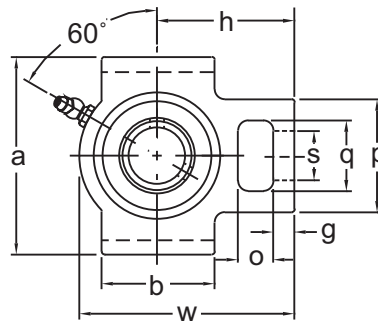


MEDIUM DUTY

Shaft Diam. (in.)	AMI Unit #	List Price	Dimensions (in.)															Bearing #	Housing #	Weight (lb.)
			o	g	p	q	s	b	k	e	a	w	J	x	h	Bi	Z			
1	UCTX05-16	87.00	5/8	3/8	2-3/16	1-7/16	7/8	2-1/4	0.472	3.504	4	4-7/16	1-7/16	1-1/8	2-3/4	1.500	1.437	UCX05-16	TX05	2.87
1-1/8	UCTX06-18	101.70	5/8	1/2	2-1/2	1-7/16	7/8	2-1/2	0.472	3.504	4	5-1/16	1-7/16	1-3/16	3-1/16	1.689	1.594	UCX06-18	TX06	3.53
1-3/16	UCTX06-19																	UCX06-19		
1-1/4	UCTX06-20																	UCX06-20		
1-1/4	UCTX07-20	127.00	3/4	9/16	3-1/4	1-15/16	1-1/8	3-1/4	0.630	4.016	4-1/2	5-11/16	1-15/16	1-7/16	3-15/32	1.937	1.908	UCX07-20	TX07	5.73
1-3/8	UCTX07-22																	UCX07-22		
1-7/16	UCTX07-23																	UCX07-23		
1-1/2	UCTX08-24	152.00	3/4	9/16	3-1/4	1-15/16	1-1/8	3-1/4	0.630	4.016	4-5/8	5-11/16	1-15/16	1-7/16	3-7/16	1.937	1.908	UCX08-24	TX08	5.73
1-5/8	UCTX09-26	164.10	3/4	5/8	3-1/4	1-15/16	1-1/8	3-3/8	0.630	4.016	4-5/8	5-7/8	1-15/16	1-1/2	3-17/32	2.031	2.033	UCX09-26	TX09	6.17
1-11/16	UCTX09-27																	UCX09-27		
1-3/4	UCTX09-28																	UCX09-28		
1-7/8	UCTX10-30	197.00	1	3/4	4	2-1/2	1-3/8	3-3/4	0.866	5.118	5-3/4	6-3/4	2-1/2	1-5/8	4-3/16	2.189	2.128	UCX10-30	TX10	9.70
1-15/16	UCTX10-31																	UCX10-31		
2	UCTX10-32																	UCX10-32		
2	UCTX11-32	263.00	1-1/4	3/4	4	2-1/2	1-3/8	4	0.866	5.118	5-3/4	7-5/8	2-1/2	1-3/4	4-11/16	2.563	2.438	UCX11-32	TX11	11.46
2-3/16	UCTX11-35																	UCX11-35		
2-1/4	UCTX11-36																	UCX11-36		
2-3/8	UCTX12-38	315.10	1-1/4	13/16	4-3/8	2-3/4	1-5/8	4-3/4	1.024	5.945	6-9/16	8-13/16	2-3/4	1-7/8	5-13/32	2.563	2.501	UCX12-38	TX12	15.87
2-7/16	UCTX12-39																	UCX12-39		
2-1/2	UCTX13-40	360.20	1-1/4	13/16	4-3/8	2-3/4	1-5/8	4-3/4	1.024	5.945	6-9/16	8-13/16	2-3/4	1-7/8	5-13/32	2.937	2.686	UCX13-40	TX13	16.31
2-11/16	UCTX14-43	426.60	1-1/4	13/16	4-3/8	2-3/4	1-5/8	4-3/4	1.024	5.945	6-9/16	9-1/8	2-3/4	1-7/8	5-1/2	3.063	2.690	UCX14-43	TX14	16.97
2-3/4	UCTX14-44																	UCX14-44		
2-15/16	UCTX15-47																	UCX15-47		
3	UCTX15-48	484.80	1-1/4	13/16	4-3/8	2-3/4	1-5/8	4-3/4	1.102	6.496	7-1/4	9-1/4	2-3/4	2	5-1/2	3.252	2.879	UCX15-48	TX15	18.51
3-3/16	UCTX16-51	655.70	1-1/2	1-1/8	4-7/8	2-7/8	1-7/8	6-3/16	1.102	6.811	7-13/16	10-1/4	2-7/8	2-1/8	6-3/8	3.374	3.094	UCX16-51	TX16	24.91
3-1/4	UCTX17-52	702.00	1-1/2	1-1/8	4-7/8	2-7/8	1-7/8	6-3/16	1.102	6.811	7-13/16	10-1/4	2-7/8	2-1/8	6-3/8	3.780	3.280	UCX17-52	TX17	24.24
3-7/16	UCTX17-55																	UCX17-55		
Dimensions (mm)																				
25	UCTX05	87.00	16	10	56	37	22	57	12	89	102	113	37	28	70	38.1	36.5	UCX05	TX05	2.90
30	UCTX06	101.70	16	13	64	37	22	64	12	89	102	129	37	30	78	42.9	40.5	UCX06	TX06	3.57
35	UCTX07	127.00	19	15	83	49	29	83	16	102	114	144	49	36	88	49.2	48.5	UCX07	TX07	5.80
40	UCTX08	152.00	19	15	83	49	29	83	16	102	117	144	49	36	87	49.2	48.5	UCX08	TX08	5.80
45	UCTX09	164.10	19	16	83	49	29	86	16	102	117	149	49	38	90	51.6	51.6	UCX09	TX09	6.24
50	UCTX10	197.00	25	19	102	64	35	95	22	130	146	171	64	42	106	55.6	54.1	UCX10	TX10	9.81
55	UCTX11	263.00	32	19	102	64	35	102	22	130	146	194	64	44	119	65.1	61.9	UCX11	TX11	11.6
60	UCTX12	315.10	32	21	111	70	41	121	26	151	167	224	70	48	137	65.1	63.5	UCX12	TX12	16.1
65	UCTX13	360.20	32	21	111	70	41	121	26	151	167	224	70	48	137	74.6	68.2	UCX13	TX13	16.5
70	UCTX14	426.60	32	21	111	70	41	121	26	151	167	232	70	48	140	77.8	68.5	UCX14	TX14	17.2
75	UCTX15	484.80	32	21	111	70	41	121	28	165	184	235	70	51	140	82.6	73.1	UCX15	TX15	18.8
80	UCTX16	655.70	38	28	124	73	48	157	28	173	198	260	73	54	162	85.7	78.6	UCX16	TX16	25.2
85	UCTX17	702.00	38	28	124	73	48	157	28	173	198	260	73	54	162	96	83.3	UCX17	TX17	24.5


Lubrication fitting tap size 1/8-27 NPT




INTERCHANGES: UCTX

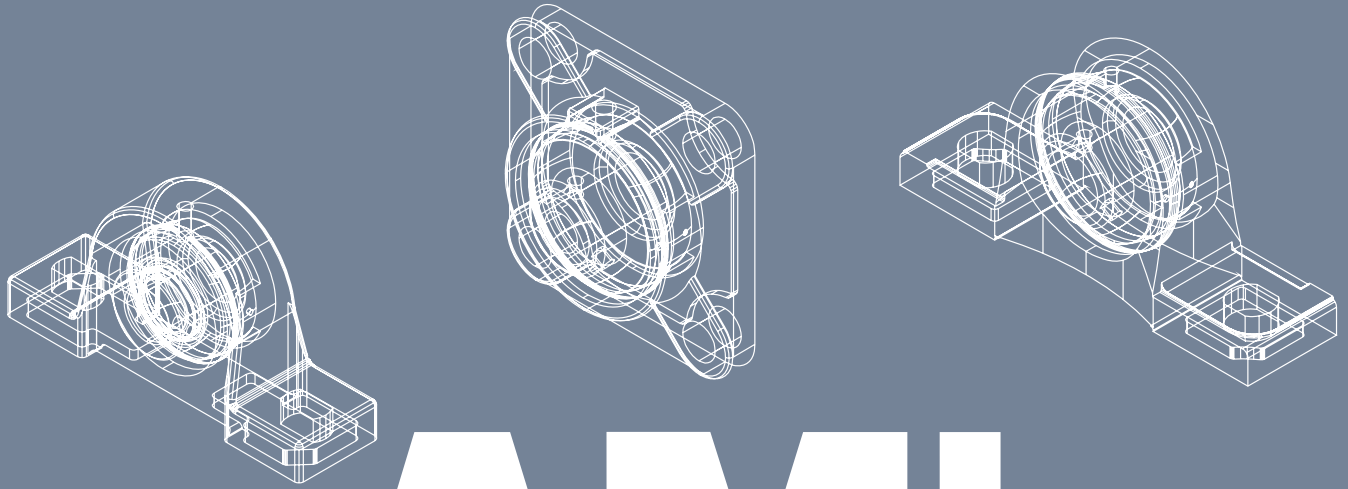

AMI

Heavy Duty

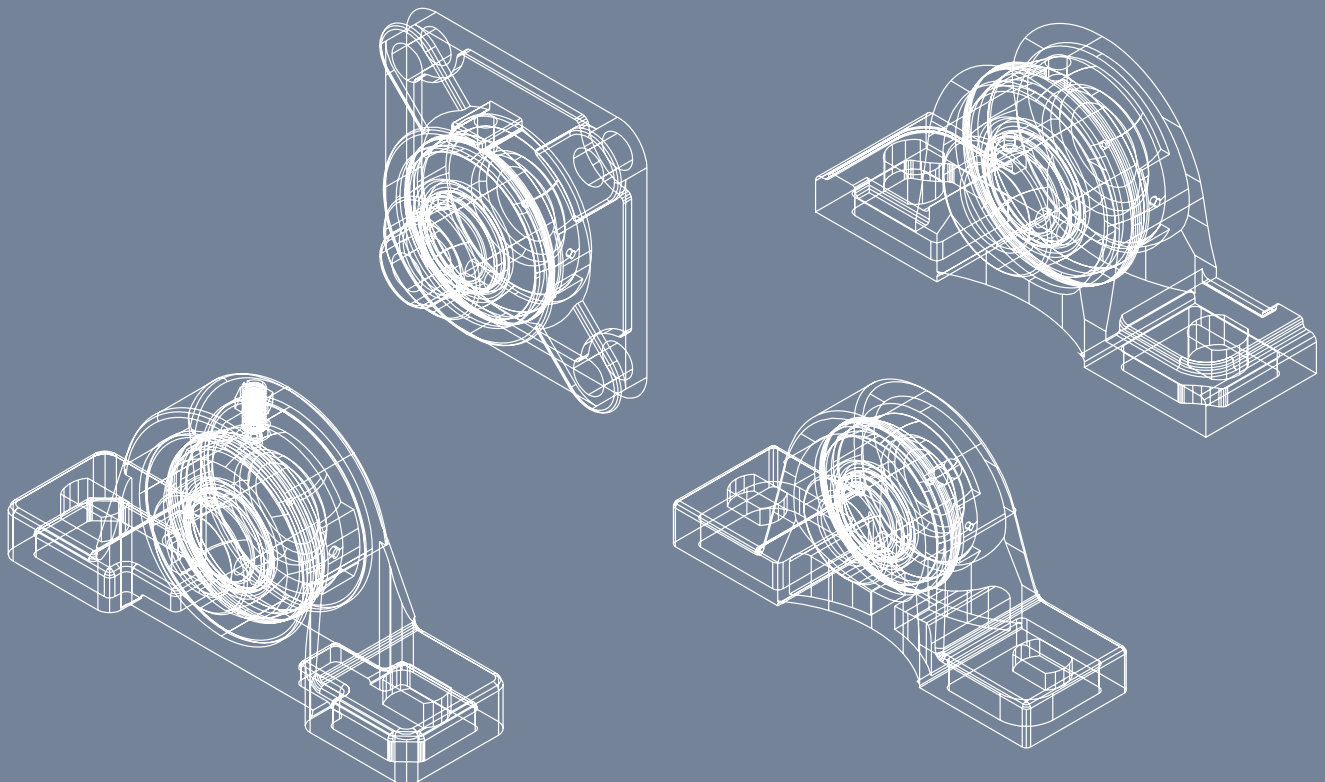

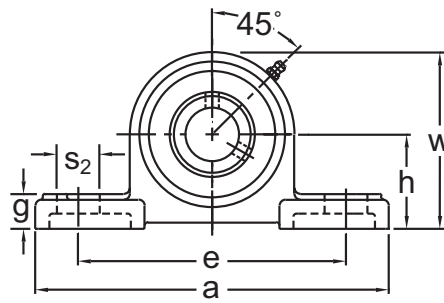


Set-Screw Locking
Wide Inner Ring
Cast Iron Housing
Insert detail-pg.134
Inch and Metric

HEAVY DUTY

Shaft Diam (in.)	AMI Unit #	List Price	Dimensions (in.)										Bolt Size (in.)	Bearing #	Housing #	Weight (lb.)
			h	a	e		b	s ₁	s ₂	g	w	Bi				
					Min.	Max.										
1	UCP305-16	115.10	1-49/64	6-7/8	4-31/32	5-17/32	1-3/4	21/32	25/32	43/64	3-1/4	1.496	1/2	UC305-16	P305	3.53
1-3/16	UCP306-19	160.30	1-31/32	7-1/16	5-7/32	5-25/32	2	21/32	25/32	7/8	3-11/16	1.693	1/2	UC306-19	P306	4.19
1-1/4	UCP307-20 UCP307-23	195.40	2-13/64	8-1/4	5-3/4	6-3/4	2-1/4	21/32	1	7/8	4-1/8	1.890	1/2	UC307-20 UC307-23	P307	5.95
1-7/16																
1-1/2	UCP308-24	227.40	2-23/64	8-11/16	6-3/16	7-5/16	2-3/8	21/32	1-1/16	63/64	4-9/16	2.047	1/2	UC308-24	P308	7.27
1-11/16	UCP309-27 UCP309-28	281.70	2-41/64	9-5/8	6-15/16	8-1/16	2-5/8	25/32	1-3/16	1	5-1/32	2.244	5/8	UC309-27 UC309-28	P309	9.92
1-3/4																
1-7/8	UCP310-30 UCP310-31	335.80	2-61/64	10-13/16	7-5/8	9-1/8	3-1/16	25/32	1-3/8	1-3/16	5-5/8	2.402	5/8	UC310-30 UC310-31	P310	13.66
1-15/16																
2	UCP311-32 UCP311-35	449.60	3-5/32	12-3/16	8-3/8	10-1/8	3-1/8	25/32	1-1/2	1-7/32	6-1/16	2.598	5/8	UC311-32 UC311-35	P311	16.97
2-3/16																
2-7/16	UCP312-39	550.10	3-11/32	13-5/32	9-1/8	10-5/8	3-3/8	1	1-1/2	1-27/64	6-1/2	2.795	3/4	UC312-39	P312	20.50
2-1/2	UCP313-40	580.10	3-35/64	13-3/8	9-1/2	11	3-1/2	1	1-1/2	1-37/64	6-27/32	2.953	3/4	UC313-40	P313	21.60
2-11/16	UCP314-43 UCP314-44	700.50	3-47/64	14-3/16	10-5/16	11-11/16	3-1/2	1-1/16	1-9/16	1-21/32	7-3/8	3.071	7/8	UC314-43 UC314-44	P314	25.13
2-3/4																
2-15/16	UCP315-47 UCP315-48	869.80	3-15/16	15-5/64	10-11/16	12-1/16	3-7/8	1-1/16	1-9/16	1-37/64	7-59/64	3.228	7/8	UC315-47 UC315-48	P315	29.97
3																
3-3/16	UCP316-51	988.60	4-11/64	15-3/4	11-1/16	12-7/16	4-3/8	1-1/16	1-9/16	1-25/32	8-7/32	3.386	7/8	UC316-51	P316	36.15
3-1/4	UCP317-52	1059.50	4-13/32	16-9/16	11-27/32	13-13/32	4-3/8	1-5/16	1-25/32	1-45/64	8-11/16	3.780	1	UC317-52	P317	40.99
3-7/16	UCP318-55 UCP318-56	1777.85	4-41/64	16-15/16	12-7/32	13-25/32	4-3/8	1-5/16	1-45/64	1-31/32	9-1/4	3.780	1	UC318-55 UC318-56	P318	46.06
3-1/2																
3-3/4	UCP319-60	1372.60	4-59/64	18-1/2	13-19/32	14-31/32	4-3/4	1-1/2	1-31/32	2-3/64	10	4.055	1-1/8	UC319-60	P319	58.41
3-15/16	UCP320-63 UCP320-64	1627.70	5-33/64	19-5/16	14-5/32	15-27/32	4-3/4	1-13/32	1-31/32	2-11/64	10-29/32	4.252	1-1/8	UC320-63 UC320-64	P320	75.60
4																
4-7/16	UCP322-71	2195.10	5-29/32	20-11/16	14-7/8	16-5/8	5-1/2	1-9/16	2-5/32	2-1/4	11-45/64	4.606	1-1/4	UC322-71	P322	94.8
Dimensions (mm)																
25	UCP305	115.10	45	175	126	141	45	17	20	17	83	38	M14	UC305	P305	3.57
30	UCP306	160.30	50	180	133	147	50	17	20	22	94	43		UC306	P306	4.24
35	UCP307	195.40	56	210	146	172	56	17	25	22	105	48		UC307	P307	6.06
40	UCP308	227.40	60	220	157	186	60	17	27	25	116	52	M14	UC308	P308	7.36
45	UCP309	281.70	67	245	176	205	67	20	30	26	128	57	M16	UC309	P309	10.0
50	UCP310	335.80	75	275	194	232	78	20	35	30	143	61	M16	UC310	P310	13.8
55	UCP311	449.60	80	310	213	257	80	20	38	31	154	66	M16	UC311	P311	17.2
60	UCP312	550.10	85	334	232	270	85	25	38	36	165	71	M20	UC312	P312	20.7
65	UCP313	580.10	90	340	241	279	90	25	38	40	174	75	M20	UC313	P313	21.9
70	UCP314	700.50	95	360	262	297	90	27	40	42	187	78	M22	UC314	P314	25.4
75	UCP315	869.80	100	383	272	306	100	27	40	40	201	82		UC315	P315	30.3
80	UCP316	988.60	106	400	281	316	110	27	40	45	209	86		UC316	P316	36.6
85	UCP317	1059.50	112	420	301	341	110	33	45	43	221	96	M27	UC317	P317	41.5
90	UCP318	1236.30	118	430	310	350	110	33	43	50	235	96	M27	UC318	P318	46.6
95	UCP319	1372.60	125	470	337	380	120	38	50	52	253	103	M30	UC319	P319	59.1
100	UCP320	1627.70	140	490	360	402	120	36	50	55	277	108	M30	UC320	P320	76.5
105	UCP321	1942.90	140	490	360	402	120	36	50	55	277	112	M30	UC321	P321	81.6
110	UCP322	2195.10	150	525	378	422	140	40	55	57	297	117	M33	UC322	P322	94.8
120	UCP324	2844.10	160	565	428	472	140	40	55	67	320	126	M33	UC324	P324	119
130	UCP326	3732.80	180	600	458	502	140	40	55	80	355	135		UC326	P326	161
140	UCP328	4535.00	200	615	478	522	140	40	55	80	390	145		UC328	P328	199

Lubrication fitting tap size 1/8-27 NPT



INTERCHANGES: UCP3



PILLOW BLOCKS

UGP 300

Eccentric Locking
Wide Inner Ring
Cast Iron Housing
Insert detail-pg.135
Inch and Metric

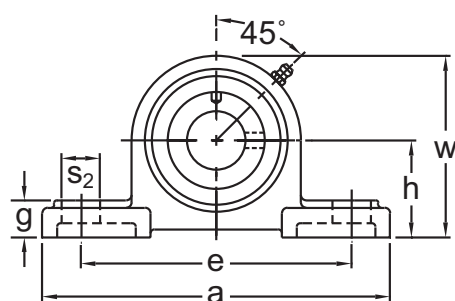


Shaft Diam (in.)	AMI Unit #	List Price	Dimensions (in.)										Bolt Size (in.)	Bearing #	Housing #	Weight (lb.)
			h	a	e		b	s ₁	s ₂	g	w	L				
1-7/16	UGP307-23	209.10	2-13/64	8-1/4	5-3/4	6-3/4	2-1/4	21/32	1	13/16	4-1/8	2.031	1/2	UG307-23	P307	6.13
1-1/2	UGP308-24	316.50	2-23/64	8-11/16	6-3/16	7-5/16	2-3/8	21/32	1-1/16	29/32	4-9/16	2.248	1/2	UG308-24	P308	7.63
1-11/16	UGP309-27	338.10	2-41/64	9-5/8	6-15/16	8-1/16	2-5/8	25/32	1-3/16	1	5-1/32	2.311	5/8	UG309-27	P309	10.36
1-15/16	UGP310-31	398.00	2-61/64	10-13/16	7-5/8	9-1/8	3-1/16	25/32	1-3/8	1-3/16	5-5/8	2.622	5/8	UG310-31	P310	14.30
2-3/16	UGP311-35	494.50	3-5/32	12-3/16	8-3/8	10-1/8	3-1/8	25/32	1-1/2	1-7/32	6-1/16	2.874	5/8	UG311-35	P311	17.53
2-7/16	UGP312-39	555.15	3-11/32	13-5/32	9-1/8	10-5/8	3-3/8	1	1-1/2	1-27/64	6-1/2	3.126	3/4	UG312-39	P312	20.98
2-11/16	UGP314-43	818.70	3-47/64	14-3/16	10-5/16	11-11/16	3-1/2	1-1/16	1-9/16	1-21/32	7-3/8	3.626	7/8	UG314-43	P314	26.47
2-15/16 3	UGP315-47 UGP315-48	861.85	3-15/16	15-5/64	10-11/16	12-1/16	3-7/8	1-1/16	1-9/16	1-37/64	7-59/64	3.937	7/8	UG315-47 UG315-48	P315	32.17
Dimensions (mm)																
45	UGP309	338.10	67	245	176	205	67	20	30	26	128	58.7	M16	UG309	P309	10.36
50	UGP310	398.00	75	275	194	232	78	20	35	30	143	66.6		UG310	P310	14.30
55	UGP311	494.50	80	310	213	257	80	20	38	31	154	73.0		UG311	P311	17.53
60	UGP312	555.15	85	334	232	270	85	25	38	36	165	79.4	M20	UG312	P312	20.98
70	UGP314	818.70	95	360	262	297	90	27	40	42	187	92.1	M22	UG314	P314	26.47
75	UGP315	861.85	100	383	272	306	100	27	40	40	201	100.0	M22	UG315	P315	32.17
90	UGP318	1246.70	118	430	310	350	110	33	43	50	235	115.9	M27	UG318	P318	50.00



Lubrication fitting tap size 1/8-27 NPT

INTERCHANGES: UELP3

HEAVY DUTY




Tapered Adapter Sleeve
Wide Inner Ring
Cast Iron Housing
Insert detail-pg.136
Inch

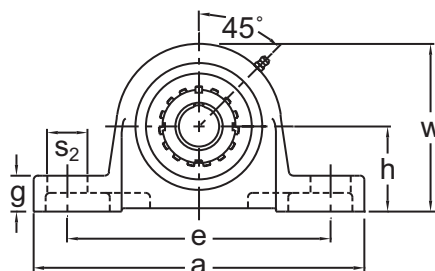

Shaft Diam (in.)	AMI Unit #	List Price	Dimensions (in.)										Bolt Size (in.)	Bearing #	Housing #	Weight (lb.)
			h	a	e		b	s ₁	s ₂	g	w	L				
					Min.	Max.										
7/8	UKPU306+HS2306	235.70	2-1/8	8-1/4	5-7/8	7	2.250	0.551	1.063	15/16	4.250	1.496	1/2	UK306+HS2306	P-U306	6.4
15/16	UKPU306+HA2306				UK306+HE2306											
1	UKPU306+HE2306															
1-1/8	UKPU307+HS2307	252.05	2-3/8	9-1/4	6-47/64	7-63/64	2.362	0.625	1.125	1	4.685	1.693	9/16	UK307+HS2307	P-U307	7.8
1-3/16	UKPU307+HA2307				UK307+HA2307											
1-7/16	UKPU309+HA2309	349.05	2-7/8	10-1/4	7-5/8	8-7/8	3.000	0.625	1.125	1-5/16	5.625	1.969	9/16	UK309+HA2309	P-U309	12.4
1-1/2	UKPU309+HE2309				UK309+HE2309	12.2										
1-5/8	UKPU309+HS2309				UK309+HS2309	12.0										
1-11/16	UKPU310+HA2310	412.85	3-1/8	11-9/64	8-17/64	9-33/64	3.150	0.625	1.125	1-3/8	6.219	2.165	9/16	UK310+HA2310	P-U310	16.0
1-3/4	UKPU310+HE2310				UK310+HE2310	15.8										
1-7/8	UKPU311+HS2311	520.60	3-1/2	12-41/64	9-49/64	10-49/64	3.386	0.787	1.250	1-1/2	6.811	2.323	3/4	UK311+HS2311	P-U311	20.6
1-15/16	UKPU311+HA2311				UK311+HA2311	20.8										
2	UKPU311+HE2311				UK311+HE2311	20.6										
2-1/16	UKPU312+HA2312	632.05	3-5/8	13-3/4	10-5/8	11-7/8	3.500	0.787	1.375	1-5/8	7.197	2.441	3/4	UK312+HA2312	P-U312	26.4
2-1/8	UKPU312+HS2312				UK312+HS2312	26.2										
2-7/16	UKPU315+HA2315	1091.45	4-1/4	15-1/8	11-1/4	12-3/4	4.000	1.024	1.654	1-3/4	8.295	2.874	7/8	UK315+HA2315	P-U315	38.8
2-1/2	UKPU315+HE2315				UK315+HE2315	38.6										
3-7/16	UKPU320+HA2320	2977.95	5-11/16	17-21/64	14	15	5.000	1.063	1.500	2-9/16	11.063	3.819	1	UK320+HA2320	P-U320	79.2
3-1/2	UKPU320+HE2320				UK320+HE2320	79.0										

Lubrication fitting tap size 1/8-27 NPT



INTERCHANGES: P-U3K



PILLOW BLOCKS

UGP-U 300

Eccentric Locking
Wide Inner Ring
Cast Iron Housing
Insert detail-pg.135
Inch and Metric



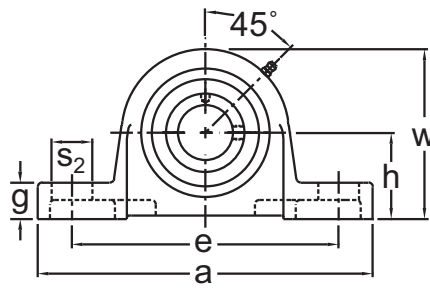


Shaft Diam (in.)	AMI Unit #	List Price	Dimensions (in.)										Bolt Size (in.)	Bearing #	Housing #	Weight (lb.)
			h	a	e		b	s ₁	s ₂	g	w	L				
1-7/16	UGPU307-23	298.00	2-3/8	9-1/4	6-47/64	7-63/64	2.362	0.625	1.125	1	4.685	2.031	9/16	UG307-23	P-U307	7.84
1-11/16	UGPU309-27	414.80	2-7/8	10-1/4	7-5/8	8-7/8	3.000	0.625	1.125	1-5/16	5.625	2.311	9/16	UG309-27	P-U309	12.72
1-15/16	UGPU310-31	496.10	3-1/8	11-9/64	8-17/64	9-33/64	3.150	0.625	1.125	1-3/8	6.219	2.622	9/16	UG310-31	P-U310	16.66
2-3/16	UGPU311-35	635.40	3-1/2	12-41/64	9-49/64	10-49/64	3.386	0.787	1.250	1-1/2	6.811	2.874	3/4	UG311-35	P-U311	21.08
2-7/16	UGPU312-39	809.10	3-5/8	13-3/4	10-5/8	11-7/8	3.500	0.787	1.375	1-5/8	7.197	3.126	3/4	UG312-39	P-U312	30.20
2-11/16	UGPU314-43	1167.60	4	14-5/8	11-5/64	12-35/64	3.750	1.024	1.614	1-3/4	7.938	3.626	7/8	UG314-43	P-U314	34.76
2-15/16 3	UGPU315-47 UGPU315-48	1303.80	4-1/4	15-1/8	11-1/4	12-3/4	4.000	1.024	1.654	1-3/4	8.295	3.937	7/8	UG315-47 UG315-48	P-U315	39.32
Dimensions (mm)																
45	UGPU309	414.80	73.0	261	194	225	76	16	28.5	33.3	143.0	58.7	M14	UG309	P-U309	10.36
50	UGPU310	496.10	79.4	283	210	242	80	16	28.5	35	158.0	66.6	M14	UG310	P-U310	14.30
55	UGPU311	635.40	88.9	321	248	273	86	20	32	38	173.0	73.0	M18	UG311	P-U311	17.53
60	UGPU312	809.10	92.1	349.2	270	302	88.9	20	35	41.3	182.8	79.4	M18	UG312	P-U312	20.98
70	UGPU314	1167.60	101.6	371.5	281	319	95.2	26	41	44.4	201.6	92.1	M24	UG314	P-U314	26.47
75	UGPU315	1303.80	108.0	384.2	286	324	101.8	26	42	44.4	210.7	100.0	M24	UG315	P-U315	32.17

Lubrication fitting tap size 1/8-27 NPT

INTERCHANGES: P-Y3

HEAVY DUTY

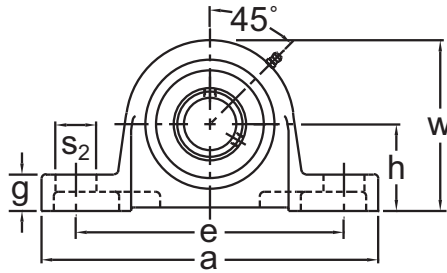


**Set-Screw Locking
Wide Inner Ring
Cast Iron Housing
Insert detail-pg.134
Inch and Metric**

HEAVY DUTY

Shaft Diam (in)	AMI Unit #	List Price	Dimensions (in.)											Bolt Size (in.)	Bearing #	Housing #	Weight (lb.)
			h	a	e		b	s ₁	s ₂	g	w	Bi					
					Min.	Max.											
1-3/16	UCPU306-19	233.20	2-1/8	8-1/4	5-7/8	7	2.250	0.551	1.063	15/16	4.250	1.693	1/2	UC306-19	P-U306	6.63	
1-1/4	UCPU307-20	248.90	2-3/8	9-1/4	6-47/64	7-63/64	2.362	0.625	1.125	1	4.685	1.890	9/16	UC307-20	P-U307	7.66	
1-7/16	UCPU307-23													UC307-23			
1-11/16	UCPU309-27	351.40	2-7/8	10-1/4	7-5/8	8-7/8	3.000	0.625	1.125	1-5/16	5.625	2.244	9/16	UC309-27	P-U309	12.28	
1-3/4	UCPU309-28													UC309-28			
1-7/8	UCPU310-30	417.40	3-1/8	11-9/64	8-17/64	9-33/64	3.150	0.625	1.125	1-3/8	6.219	2.402	9/16	UC310-30	P-U310	16.02	
1-15/16	UCPU310-31													UC310-31			
2	UCPU311-32	523.80	3-1/2	12-41/64	9-49/64	10-49/64	3.386	0.787	1.250	1-1/2	6.811	2.598	3/4	UC311-32	P-U311	20.52	
2-3/16	UCPU311-35													UC311-35			
2-7/16	UCPU312-39	638.50	3-5/8	13-3/4	10-5/8	11-7/8	3.500	0.787	1.375	1-5/8	7.197	2.795	3/4	UC312-39	P-U312	29.72	
2-11/16	UCPU314-43	870.20	4	14-5/8	11-5/64	12-35/64	3.750	1.024	1.614	1-3/4	7.938	3.071	7/8	UC314-43	P-U314	33.42	
2-3/4	UCPU314-44													UC314-44			
2-15/16	UCPU315-47	1181.30	4-1/4	15-1/8	11-1/4	12-3/4	4.000	1.024	1.654	1-3/4	8.295	3.228	7/8	UC315-47	P-U315	37.12	
3	UCPU315-48													UC315-48			
3-3/16	UCPU316-51	1323.90	4-9/16	15-25/64	11-1/2	13	4.173	1.063	1.614	1-59/64	9.016	3.386	1	UC316-51	P-U316	40.30	
3-7/16	UCPU318-55	2402.25	5-1/8	16-9/64	12-1/8	13-5/8	5.000	1.063	1.614	2-1/4	10.079	3.780	1	UC318-55	P-U318	60.30	
3-1/2	UCPU318-56													UC318-56			
3-15/16	UCPU320-63	3134.70	5-11/16	17-21/64	13-7/8	15-1/8	5.000	1.063	1.496	2-9/16	11.063	4.252	1	UC320-63	P-U320	78.70	
4	UCPU320-64													UC320-64			
Dimensions (mm)																	
30	UCPU306	233.20	54.0	210	149	178	57.2	14	27	23.8	108.0	43	M12	UC306	P-U306	6.65	
35	UCPU307	248.90	60.3	235	171	203	60	16	28.5	25.4	119.0	48	M14	UC307	P-U307	7.68	
45	UCPU309	351.40	73.0	261	194	225	76	16	28.5	33.3	143.0	57	M14	UC309	P-U309	12.31	
50	UCPU310	417.40	79.4	283	210	242	80	16	28.5	35	158.0	61	M14	UC310	P-U310	16.06	
55	UCPU311	523.80	88.9	321	248	273	86	20	32	38	173.0	66	M18	UC311	P-U311	20.58	
60	UCPU312	638.50	92.1	349	270	302	88.9	20	35	41.3	182.8	71	M20	UC312	P-U312	29.79	
70	UCPU314	870.20	101.6	372	281	319	95.2	26	41	44.4	201.6	78	M24	UC314	P-U314	33.55	
75	UCPU315	1181.30	108	384	286	324	101.8	26	42	44.4	210.7	82		UC315	P-U315	37.30	
80	UCPU316	1323.90	115.9	391	292	330	106	27	41	49	229	86		UC316	P-U316	40.30	
90	UCPU318	2402.25	130.2	410	308	346	127	27	41	57	256	96	M24	UC318	P-U318	60.30	
100	UCPU320	3134.70	144.5	440	352	384	127	27	38	65	281	108		UC320	P-U320	78.70	

Lubrication fitting tap size 1/8-27 NPT


INTERCHANGES: P-U3



EXPANSION PILLOW BLOCKS

UGPE-U 300

Eccentric Locking
Wide Inner Ring
Cast Iron Housing
Expansion Type
Insert detail-pg.135
Inch and Metric



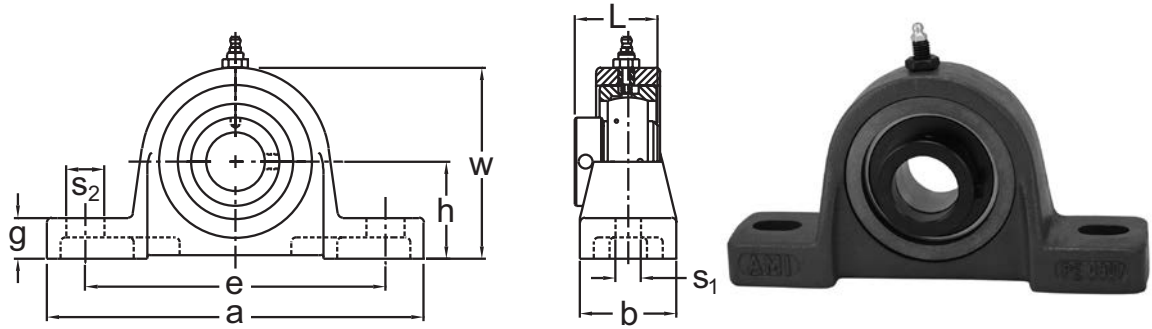


Shaft Diam (in.)	AMI Unit #	List Price	Dimensions (in.)										Bolt Size (in.)	Bearing #	Housing #	Weight (lb.)
			h	a	e		b	s ₁	s ₂	g	w	L				
1-7/16	UGPEU307-23	463.10	2-3/8	9-1/4	6-47/64	7-63/64	2.362	0.625	1.125	1	4.685	2.031	9/16	UG207-23	PE-U307	6.13
1-11/16	UGPEU309-27	582.00	2-7/8	10-1/4	7-5/8	8-7/8	3.000	0.625	1.125	1-5/16	5.625	2.311	9/16	UG309-27	PE-U309	10.36
1-15/16	UGPEU310-31	695.60	3-1/8	11-9/64	8-17/64	9-33/64	3.150	0.625	1.125	1-3/8	6.219	2.622	9/16	UG310-31	PE-U310	14.30
2-3/16	UGPEU311-35	873.00	3-1/2	12-41/64	9-49/64	10-49/64	3.386	0.787	1.250	1-1/2	6.811	2.874	3/4	UG311-35	PE-U311	17.53
2-7/16	UGPEU312-39	1036.40	3-5/8	13-3/4	10-5/8	11-7/8	3.500	0.787	1.375	1-5/8	7.197	3.126	3/4	UG312-39	PE-U312	20.98
2-11/16	UGPEU314-43	1314.50	4	14-5/8	11-5/64	12-35/64	3.750	1.024	1.614	1-3/4	7.938	3.626	7/8	UG314-43	PE-U314	26.47
2-15/16 3	UGPEU315-47 UGPEU315-48	1645.90	4-1/4	15-1/8	11-1/4	12-3/4	4.000	1.024	1.654	1-3/4	8.295	3.937	7/8	UG315-47 UG315-48	PE-U315	32.17
Dimensions (mm)																
45	UGPEU309	582.00	73.0	261	194	225	76	16	28.5	33.3	143.0	58.7	M14	UG309	PE-U309	10.36
50	UGPEU310	695.60	79.4	283	210	242	80	16	28.5	35	158.0	66.6	M14	UG310	PE-U310	14.30
55	UGPEU311	873.00	88.9	321	248	273	86	20	32	38	173.0	73.0	M18	UG311	PE-U311	17.53
60	UGPEU312	1036.40	92.1	349.2	270	302	88.9	20	35	41.3	182.8	79.4	M18	UG312	PE-U312	20.98
70	UGPEU314	1314.50	101.6	371.5	281	319	95.2	26	41	44.4	201.6	92.1	M24	UG314	PE-U314	26.47
75	UGPEU315	1645.90	108.0	384.2	286	324	101.8	26	42	44.4	210.7	100.0	M24	UG315	PE-U315	32.17

Lubrication fitting tap size 1/8-27 NPT

INTERCHANGES: PE-Y3

HEAVY DUTY

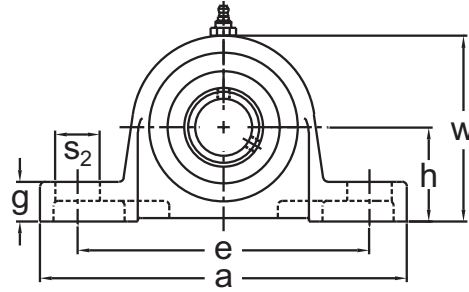


**Set-Screw Locking
Wide Inner Ring
Cast Iron Housing
Expansion Type
Insert detail-pg.134
Inch and Metric**

HEAVY DUTY



Shaft Diam. (in.)	AMI Unit #	List Price	Dimensions (in.)										Bolt Size (in.)	Bearing #	Housing #	Weight (lb.)
			h	a	e		b	s ₁	s ₂	g	w	Bi				
					Min.	Max.										
1-1/4 1-7/16	UCPEU307-20 UCPEU307-23	414.00	2-3/8	9-1/4	6-47/64	7-63/64	2.362	0.625	1.125	1	4.685	1.890	9/16	UC307-20 UC307-23	PE-U307	7.80
1-11/16 1-3/4	UCPEU309-27 UCPEU309-28	518.60	2-7/8	10-1/4	7-5/8	8-7/8	3.000	0.625	1.125	1-5/16	5.625	2.244	9/16	UC309-27 UC309-28	PE-U309	12.10
1-7/8 1-15/16	UCPEU310-30 UCPEU310-31	616.90	3-1/8	11-9/64	8-17/64	9-33/64	3.150	0.625	1.125	1-3/8	6.219	2.402	9/16	UC310-30 UC310-31	PE-U310	15.74
2 2-3/16	UCPEU311-32 UCPEU311-35	761.40	3-1/2	12-41/64	9-49/64	10-49/64	3.386	0.787	1.250	1-1/2	6.811	2.598	3/4	UC311-32 UC311-35	PE-U311	20.62
2-7/16	UCPEU312-39	865.80	3-5/8	13-3/4	10-5/8	11-7/8	3.500	0.787	1.375	1-5/8	7.197	2.795	3/4	UC312-39	PE-U312	25.59
2-11/16 2-3/4	UCPEU314-43 UCPEU314-44	1030.50	4	14-5/8	11-5/64	12-35/64	3.750	1.024	1.614	1-3/4	7.938	3.071	7/8	UC314-43 UC314-44	PE-U314	31.42
2-15/16 3	UCPEU315-47 UCPEU315-48	1523.40	4-1/4	15-1/8	11-1/4	12-3/4	4.000	1.024	1.654	1-3/4	8.295	3.228	7/8	UC315-47 UC315-48	PE-U315	36.76
3-3/16	UCPEU316-51	1884.10	4-9/16	15-25/64	11-1/2	13	4.173	1.063	1.614	1-59/64	9.016	3.386	1	UC316-51	PE-U316	36.94
3-7/16 3-1/2	UCPEU318-55 UCPEU318-56	2805.75	5-1/8	16-9/64	12-1/8	13-5/8	5.000	1.063	1.614	2-1/4	10.079	3.780	1	UC318-55 UC318-56	PE-U318	60.30
3-15/16 4	UCPEU320-63 UCPEU320-64	3461.60	5-11/16	17-21/64	14	15	5.000	1.063	1.496	2-9/16	11.063	4.252	1	UC320-63 UC320-64	PE-U320	73.75
Dimensions (mm)																
35	UCPEU307	414.00	60.3	235	171	203	60	16	28.5	25.4	119.0	48	M14	UC307	PE-U307	7.82
45	UCPEU309	518.60	73.0	261	194	225	76	16	28.5	33.3	143.0	57		UC309	PE-U309	12.13
50	UCPEU310	616.90	79.4	283	210	242	80	16	28.5	35	158.0	61		UC310	PE-U310	15.78
55	UCPEU311	761.40	88.9	321	248	273	86	20	32	38	173.0	66	M18	UC311	PE-U311	20.68
60	UCPEU312	865.80	92.1	349	270	302	88.9	20	35	41.3	182.8	71	M18	UC312	PE-U312	25.66
70	UCPEU314	1030.50	101.6	372	281	319	95.2	26	41	44.4	201.6	78	M24	UC314	PE-U314	31.52
75	UCPEU315	1523.40	108	384	286	324	101.8	26	42	44.4	210.7	82	M24	UC315	PE-U315	36.76
80	UCPEU316	1884.10	115.9	391	292	330	106	27	41	49	229	86		UC316	PE-U316	36.94
90	UCPEU318	2805.75	130.2	410	308	346	127	27	41	57	256	96		UC318	PE-U318	60.30
100	UCPEU320	3461.60	144.5	440	356	381	127	27	38	65	281	108	M24	UC320	PE-U320	73.75

Lubrication fitting tap size 1/8-27 NPT

INTERCHANGES: PE-U3



Eccentric Locking
Wide Inner Ring
Cast Iron Housing
Insert detail-pg.135
Inch and Metric



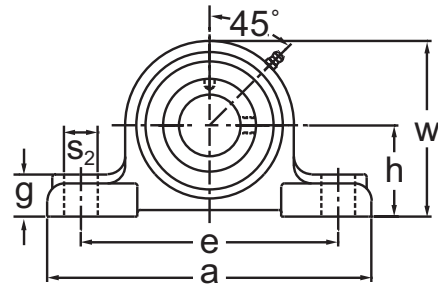


Shaft Diam (in.)	AMI Unit #	List Price	Dimensions (in.)										Bolt Size (in.)	Bearing #	Housing #	Weight (lb.)
			h	a	e		b	s ₁	s ₂	g	w	L				
1-7/16	UGAO307-23	272.60	2-1/8	7-9/16	5.713	6.287	2-1/8	0.669	0.787	63/64	4-3/32	2.031	1/2	UG307-23	AO307	5.68
1-1/2	UGAO308-24	324.50	2-3/8	8-1/2	6.351	7.149	2-13/32	0.787	1.024	1-1/16	4-21/32	2.248	5/8	UG308-24	AO308	8.18
1-11/16	UGAO309-27	376.10	2-5/8	9-7/16	7.101	7.899	2-41/64	0.787	1.024	1-3/16	5-1/8	2.311	5/8	UG309-27	AO309	10.70
1-15/16	UGAO310-31	452.80	2-13/16	10-7/16	7.851	8.649	2-61/64	0.787	1.024	1-19/64	5-19/32	2.622	5/8	UG310-31	AO310	14.78
2-3/16	UGAO311-35	573.00	3-1/16	11-5/16	8.608	9.392	3-9/64	0.906	1.142	1-1/2	6-1/32	2.874	3/4	UG311-35	AO311	18.08
2-7/16	UGAO312-39	721.60	3-5/16	12-19/64	9.358	10.142	3-5/16	0.906	1.142	1-37/64	6-17/32	3.126	3/4	UG312-39	AO312	22.71
2-11/16	UGAO314-43	1085.40	3-13/16	14-11/64	10.786	11.714	3-25/32	1.024	1.339	1-13/16	7-9/16	3.626	7/8	UG314-43	AO314	34.88
2-15/16 3	UGAO315-47 UGAO315-48	1135.10	4-1/8	15-1/8	11.536	12.464	4-1/16	1.024	1.339	1-59/64	8-5/64	3.937	7/8	UG315-47 UG315-48	AO315	43.22
Dimensions (mm)																
45	UGAO309	376.10	66.7	240	180	201	67	20	26	30	130	58.7	M16	UG309	AO309	10.70
50	UGAO310	452.80	71.4	265	199	220	75	20	26	33	142	66.6	M16	UG310	AO310	14.78
55	UGAO311	573.00	77.8	287	219	239	80	23	29	38	153	73.0	M20	UG311	AO311	18.08
60	UGAO312	721.60	84.1	312	238	258	84	23	29	40	166	79.4	M20	UG312	AO312	22.71
70	UGAO314	1085.40	96.8	360	274	298	96	26	34	46	192	92.1	M22	UG314	AO314	34.88
75	UGAO315	1135.10	104.8	384	293	317	103	26	34	49	205	100.0	M22	UG315	AO315	43.22

Lubrication fitting tap size 1/8-27 NPT

INTERCHANGES: RAO PLY3-N

HEAVY DUTY

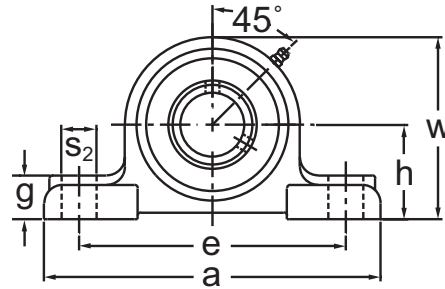


Set-Screw Locking
Wide Inner Ring
Cast Iron Housing
Insert detail-pg.134
Inch and Metric

HEAVY DUTY



Shaft Diam (in.)	AMI Unit #	List Price	Dimensions (in.)										Bolt Size (in.)	Bearing #	Housing #	Weight (lb.)
			h	a	e		b	s ₁	s ₂	g	w	Bi				
					Min.	Max.										
1-3/16	UCAO306-19	211.40	1-7/8	6-13/16	5.088	5.662	1-59/64	0.669	0.787	29/32	3-25/32	1.693	1/2	UC306-19	AO306	4.11
1-1/4	UCAO307-20	223.50	2-1/8	7-9/16	5.713	6.287	2-1/8	0.669	0.787	63/64	4-3/32	1.890	1/2	UC307-20	AO307	5.50
1-7/16	UCAO307-23													UC307-23		
1-1/2	UCAO308-24	262.70	2-3/8	8-1/2	6.351	7.149	2-13/32	0.787	1.024	1-1/16	4-21/32	2.047	5/8	UC308-24	AO308	7.82
1-11/16	UCAO309-27	312.70	2-5/8	9-7/16	7.101	7.899	2-41/64	0.787	1.024	1-3/16	5-1/8	2.244	5/8	UC309-27	AO309	10.26
1-3/4	UCAO309-28													UC309-28		
1-7/8	UCAO310-30	374.10	2-13/16	10-7/16	7.851	8.649	2-61/64	0.787	1.024	1-19/64	5-19/32	2.402	5/8	UC310-30	AO310	14.14
1-15/16	UCAO310-31													UC310-31		
2	UCAO311-32	461.40	3-1/16	11-5/16	8.608	9.392	3-9/64	0.906	1.142	1-1/2	6-1/32	2.598	3/4	UC311-32	AO311	17.52
2-3/16	UCAO311-35													UC311-35		
2-7/16	UCAO312-39	551.00	3-5/16	12-19/64	9.358	10.142	3-5/16	0.906	1.142	1-37/64	6-17/32	2.795	3/4	UC312-39	AO312	22.23
2-11/16	UCAO314-43	963.40	3-13/16	14-11/64	10.786	11.714	3-25/32	1.024	1.339	1-13/16	7-9/16	3.071	7/8	UC314-43	AO314	33.54
2-3/4	UCAO314-44													UC314-44		
2-15/16	UCAO315-47	1012.60	4-1/8	15-1/8	11.536	12.464	4-1/16	1.024	1.339	1-59/64	8-5/64	3.228	7/8	UC315-47	AO315	41.02
3	UCAO315-48													UC315-48		
Dimensions (mm)																
30	UCAO306	211.40	47.6	173	129	144	49	17	20	23	96	43	M14	UC306	AO306	4.13
35	UCAO307	223.50	54.0	192	145	160	54	17	20	25	104	48	M14	UC307	AO307	5.52
40	UCAO308	262.70	60.3	216	161	182	61	20	26	27	118	52	M16	UC308	AO308	7.85
45	UCAO309	312.70	66.7	240	180	201	67	20	26	30	130	57	M16	UC309	AO309	10.29
50	UCAO310	374.10	71.4	265	199	220	75	20	26	33	142	61	M16	UC310	AO310	14.18
55	UCAO311	461.40	77.8	287	219	239	80	23	29	38	153	66	M20	UC311	AO311	17.58
60	UCAO312	551.00	84.1	312	238	258	84	23	29	40	166	71	M20	UC312	AO312	22.30
70	UCAO314	963.40	96.8	360	274	298	96	26	34	46	192	78	M22	UC314	AO314	33.64
75	UCAO315	1012.60	104.8	384	293	317	103	26	34	49	205	82	M22	UC315	AO315	41.20

Lubrication fitting tap size 1/8-27 NPT

INTERCHANGES: AMI exclusive






**Eccentric Locking
Wide Inner Ring
Cast Iron Housing
Insert detail-pg.135
Inch and Metric**

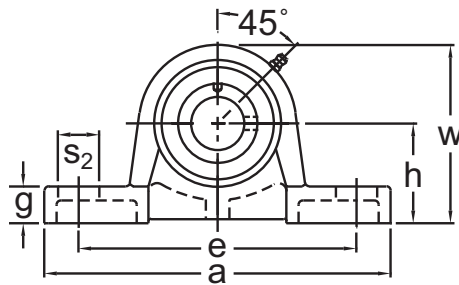

Shaft Diam (in.)	AMI Unit #	List Price	Dimensions (in.)										Bolt Size (in.)	Bearing #	Housing #	Weight (lb.)
			h	a	e		b	s ₁	s ₂	g	w	L				
					Min.	Max.										
1-7/16	UGSAO307-23	298.40	2-3/4	10-5/8	7.789	8.743	2-3/4	0.750	1.102	15/16	4-13/16	2.031	5/8	UG307-23	SAO307	8.04
1-1/2	UGSAO308-24	358.00	3-1/8	11-3/8	8.500	9.532	3-1/8	0.750	1.141	1-3/16	5-45/64	2.248	5/8	UG308-24	SAO308	12.40
1-11/16	UGSAO309-27	416.90	3-1/8	11-3/8	8.500	9.532	3-1/8	0.750	1.141	1-3/16	5-45/64	2.311	5/8	UG309-27	SAO309	12.50
1-15/16	UGSAO310-31	476.40	3-1/8	11-3/8	8.500	9.532	3-1/8	0.750	1.141	1-19/64	5-53/64	2.622	5/8	UG310-31	SAO310	16.11
2-3/16	UGSAO311-35	637.70	3-3/4	12-19/32	9.500	11.000	3-1/2	0.875	1.375	1-13/32	6-45/64	2.874	3/4	UG311-35	SAO311	19.72
2-7/16	UGSAO312-39	796.00	4-1/8	13-3/4	10.625	11.875	4	0.875	1.375	1-1/2	7-21/64	3.126	3/4	UG312-39	SAO312	30.89
2-11/16	UGSAO314-43	1147.10	4-9/16	15-23/64	11.500	12.500	4-3/8	0.984	1.375	1-3/4	8-1/4	3.626	7/8	UG314-43	SAO314	36.51
2-15/16 3	UGSAO315-47 UGSAO315-48	1258.70	4-9/16	15-23/64	11.343	13.375	4-3/8	0.984	1.891	1-57/64	8-45/64	3.937	7/8	UG315-47 UG315-48	SAO315	42.06
Dimensions (mm)																
45	UGSAO309	416.90	79.4	289	216	242	79	19	29	30	145	58.7	M16	UG309	SAO309	10.36
50	UGSAO310	476.40	79.4	289	216	242	79	19	29	33	148	66.6	M16	UG310	SAO310	14.30
55	UGSAO311	637.70	95.2	320	241	279	89	22	35	36	170	73.0	M20	UG311	SAO311	17.53
60	UGSAO312	796.00	104.8	349	270	302	101	22	35	38	186	79.4	M20	UG312	SAO312	20.98
70	UGSAO314	1147.10	115.9	390	292	318	111	25	35	44	210	92.1	M22	UG314	SAO314	26.47
75	UGSAO315	1258.70	115.9	390	288	340	111	25	48	48	221	100.0	M22	UG315	SAO315	32.17

Lubrication fitting tap size 1/8-27 NPT

INTERCHANGES: RSAO

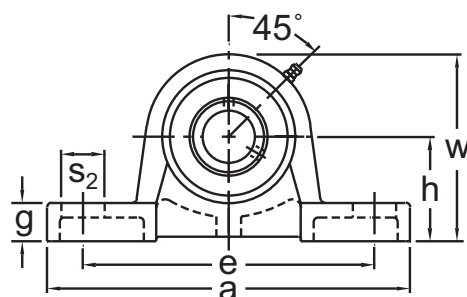


Set-Screw Locking
Wide Inner Ring
Cast Iron Housing
Insert detail-pg.134
Inch and Metric

HEAVY DUTY

Shaft Diam (in.)	AMI Unit #	List Price	Dimensions (in.)										Bolt Size (in.)	Bearing #	Housing #	Weight (lb.)
			h	a	e		b	s ₁	s ₂	g	w	Bi				
					Min.	Max.										
1-3/16	UCSAO306-19	190.20	2-3/8	8-1/4	6.141	7.109	2-3/8	0.625	0.984	7/8	4-1/4	1.693	1/2	UC306-19	SAO306	5.65
1-1/4	UCSAO307-20	249.30	2-3/4	10-5/8	7.789	8.743	2-3/4	0.750	1.102	15/16	4-13/16	1.890	5/8	UC307-20	SAO307	7.86
1-7/16	UCSAO307-23		2-3/4	10-5/8	7.789	8.743	2-3/4	0.750	1.102	15/16	4-13/16	1.890	5/8	UC307-23	SAO307	7.86
1-1/2	UCSAO308-24	296.20	3-1/8	11-3/8	8.500	9.532	3-1/8	0.750	1.141	1-3/16	5-45/64	2.047	5/8	UC308-24	SAO308	12.04
1-11/16	UCSAO309-27	353.50	3-1/8	11-3/8	8.500	9.532	3-1/8	0.750	1.141	1-3/16	5-45/64	2.244	5/8	UC309-27	SAO309	12.06
1-3/4	UCSAO309-28		3-1/8	11-3/8	8.500	9.532	3-1/8	0.750	1.141	1-3/16	5-45/64	2.244	5/8	UC309-28	SAO309	12.06
1-7/8	UCSAO310-30	397.70	3-1/8	11-3/8	8.500	9.532	3-1/8	0.750	1.141	1-19/64	5-53/64	2.402	5/8	UC310-30	SAO310	15.47
1-15/16	UCSAO310-31		3-1/8	11-3/8	8.500	9.532	3-1/8	0.750	1.141	1-19/64	5-53/64	2.402	5/8	UC310-31	SAO310	15.47
2	UCSAO311-32	526.10	3-3/4	12-19/32	9.500	11.000	3-1/2	0.875	1.375	1-13/32	6-45/64	2.598	3/4	UC311-32	SAO311	19.16
2-3/16	UCSAO311-35		3-3/4	12-19/32	9.500	11.000	3-1/2	0.875	1.375	1-13/32	6-45/64	2.598	3/4	UC311-35	SAO311	19.16
2-7/16	UCSAO312-39	625.40	4-1/8	13-3/4	10.625	11.875	4	0.875	1.375	1-1/2	7-21/64	2.795	3/4	UC312-39	SAO312	30.41
2-11/16	UCSAO314-43	1068.85	4-9/16	15-23/64	11.500	12.500	4-3/8	0.984	1.375	1-3/4	8-1/4	3.071	7/8	UC314-43	SAO314	35.17
2-3/4	UCSAO314-44		4-9/16	15-23/64	11.500	12.500	4-3/8	0.984	1.375	1-3/4	8-1/4	3.071	7/8	UC314-44	SAO314	35.17
2-15/16	UCSAO315-47	1136.20	4-9/16	15-23/64	11.343	13.375	4-3/8	0.984	1.891	1-57/64	8-45/64	3.228	7/8	UC315-47	SAO315	39.86
3	UCSAO315-48		4-9/16	15-23/64	11.343	13.375	4-3/8	0.984	1.891	1-57/64	8-45/64	3.228	7/8	UC315-48	SAO315	39.86
3-3/16	UCSAO316-51	1566.60	4-9/16	15-23/64	11.343	13.375	4-3/8	0.984	1.891	1-59/64	8-25/32	3.386	7/8	UC316-51	SAO316	40.03
3-7/16	UCSAO318-55	2350.60	5-1/8	16-7/64	12.603	14.147	4-3/4	1.142	1.772	2-1/4	9-7/8	3.780	1	UC318-55	SAO318	53.86
3-1/2	UCSAO318-56	1771.40												UC318-56	SAO318	53.86
3-15/16	UCSAO320-63	2649.90	5-11/16	17-21/64	14.018	15.482	5-1/8	1.142	1.732	2-9/16	11-1/16	4.252	1	UC320-63	SAO320	74.70
4	UCSAO320-64													UC320-64	SAO320	74.70
Dimensions (mm)																
30	UCSAO306	190.20	60.3	209	156	181	60	16	25	22	108	43	M14	UC306	SAO306	5.67
35	UCSAO307	249.30	69.8	270	198	222	70	19	28	24	122	48	M16	UC307	SAO307	7.88
40	UCSAO308	296.20	79.4	289	216	242	79	19	29	30	145	52	M16	UC308	SAO308	12.07
45	UCSAO309	353.50	79.4	289	216	242	79	19	29	30	145	57	M16	UC309	SAO309	12.09
50	UCSAO310	397.70	79.4	289	216	242	79	19	29	33	148	61	M16	UC310	SAO310	15.51
55	UCSAO311	526.10	95.2	320	241	279	89	22	35	36	170	66	M20	UC311	SAO311	19.22
60	UCSAO312	625.40	104.8	349	270	302	101	22	35	38	186	71	M20	UC312	SAO312	30.48
70	UCSAO314	1068.85	115.9	390	292	318	111	25	35	44	210	78	M22	UC314	SAO314	35.27
75	UCSAO315	1136.20	115.9	390	288	340	111	25	48	48	221	82	M22	UC315	SAO315	40.04
80	UCSAO316	1566.60	115.9	390	288	340	111	25	48	49	223	86	M22	UC316	SAO316	40.23
90	UCSAO318	1771.40	130.2	409	320	359	120	29	45	57	251	96	M27	UC318	SAO318	54.08
100	UCSAO320	2649.90	144.5	440	356	393	130	29	44	65	281	108	M27	UC320	SAO320	75.00

Lubrication fitting tap size 1/8-27 NPT



INTERCHANGES: P2U3



PILLOW BLOCKS

UKP 300+H

Tapered Adapter Sleeve
Wide Inner Ring
Cast Iron Housing
Insert detail-pg.136
Inch and Metric

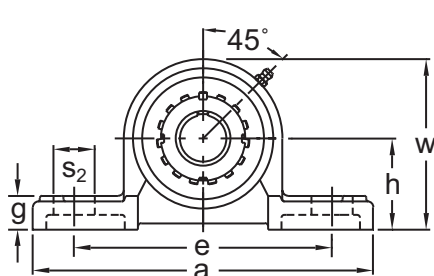

Shaft Diam (in.)	AMI Unit #	List Price	Dimensions (in.)											Bolt Size (in.)	Bearing #	Housing #	Weight (lb.)
			h	a	e		b	s ₁	s ₂	g	w	L					
					Min.	Max.											
3/4	UKP305+HE2305	166.20	1-49/64	6-7/8	4-31/32	5-17/32	1-3/4	21/32	25/32	43/64	3-1/4	1.378	1/2	UK305+HE2305	P305	3.57	
7/8	UKP306+HS2306	204.50	1-31/32	7-1/16	5-7/32	5-25/32	2	21/32	25/32	7/8	3-11/16	1.496	1/2	UK306+HS2306	P306	4.24	
15/16	UKP306+HA2306													UK306+HA2306			
1	UKP306+HE2306													UK306+HE2306			
1-1/8	UKP307+HS2307	242.00	2-13/64	8-1/4	5-3/4	6-3/4	2-1/4	21/32	1	7/8	4-1/8	1.693	1/2	UK307+HS2307	P307	6.02	
1-3/16	UKP307+HA2307													UK307+HA2307			
1-1/4	UKP308+HE2308	287.00	2-23/64	8-11/16	6-3/16	7-5/16	2-3/8	21/32	1-1/16	63/64	4-9/16	1.811	1/2	UK308+HE2308	P308	6.69	
1-5/16	UKP308+HA2308													UK308+HA2308			
1-3/8	UKP308+HS2308													UK308+HS2308			
1-7/16	UKP309+HA2309	356.70	2-41/64	9-5/8	6-15/16	8-1/16	2-5/8	25/32	1-3/16	1	5-1/32	1.969	5/8	UK309+HA2309	P309	10.30	
1-1/2	UKP309+HE2309													UK309+HE2309			
1-5/8	UKP309+HS2309													UK309+HS2309			
1-11/16	UKP310+HA2310	455.40	2-61/64	10-13/16	7-5/8	9-1/8	3-1/16	25/32	1-3/8	1-3/16	5-5/8	2.165	5/8	UK310+HA2310	P310	13.90	
1-3/4	UKP310+HE2310													UK310+HE2310			
1-7/8	UKP311+HS2311													UK311+HS2311			
1-15/16	UKP311+HA2311	565.50	3-5/32	12-3/16	8-3/8	10-1/8	3-1/8	25/32	1-1/2	1-7/32	6-1/16	2.323	5/8	UK311+HA2311	P311	17.70	
2	UKP311+HE2311													UK311+HE2311			
2-1/16	UKP312+HA2312	671.00	3-11/32	13-5/32	9-1/8	10-5/8	3-3/8	1	1-1/2	1-27/64	6-1/2	2.441	3/4	UK312+HA2312	P312	20.80	
2-1/8	UKP312+HS2312													UK312+HS2312			
2-3/16	UKP313+HA2313	762.00	3-35/64	13-3/8	9-1/2	11	3-1/2	1	1-1/2	1-37/64	6-27/32	2.559	3/4	UK313+HA2313	P313	21.90	
2-1/4	UKP313+HE2313													UK313+HE2313			
2-3/8	UKP313+HS2313													UK313+HS2313			
2-7/16	UKP315+HA2315	1065.00	3-15/16	15-5/64	10-11/16	12-1/16	3-7/8	1-1/16	1-9/16	1-37/64	7-59/64	2.874	7/8	UK315+HA2315	P315	30.60	
2-1/2	UKP315+HE2315													UK315+HE2315			
2-11/16	UKP316+HA2316	1225.00	4-11/64	15-3/4	11-1/16	12-7/16	4-3/8	1-1/16	1-9/16	1-25/32	8-7/32	3.071	7/8	UK316+HA2316	P316	37.10	
2-3/4	UKP316+HE2316													UK316+HE2316			
2-15/16	UKP317+HA2317	1480.00	4-13/32	16-9/16	11-27/32	13-13/32	4-3/8	1-5/16	1-25/32	1-45/64	8-11/16	3.228	1	UK317+HA2317	P317	41.50	
3	UKP317+HE2317													UK317+HE2317			
3-1/8	UKP318+HS2318	1634.00	4-41/64	16-15/16	12-7/32	13-25/32	4-3/8	1-5/16	1-45/64	1-31/32	9-1/4	3.386	1	UK318+HS2318	P318	47.10	
3-3/16	UKP318+HA2318													UK318+HA2318			
3-1/4	UKP319+HE2319	2015.00	4-59/64	18-1/2	13-19/32	14-31/32	4-3/4	1-1/2	1-31/32	2-3/64	10	3.543	1-1/8	UK319+HE2319	P319	59.10	
3-7/16	UKP320+HA2320	2350.00	5-33/64	19-5/16	14-5/32	15-27/32	4-3/4	1-13/32	1-31/32	2-11/64	10-29/32	3.819	1-1/8	UK320+HA2320	P320	76.50	
3-1/2	UKP320+HE2320													UK320+HE2320			
4	UKP322+HE2322	3178.00	5-29/32	20-11/16	14-7/8	16-5/8	5-1/2	1-9/16	2-5/32	2-1/4	11-45/64	4.134	1-1/4	UK322+HE2322	P322	95.00	
Dimensions (mm)																	
20	UKP305+H2305	166.20	45	175	126	141	45	17	20	17	83	35	M14	UK305+H2305	P305	3.57	
25	UKP306+H2306	204.50	50	180	133	147	50	17	20	22	94	38		UK306+H2306	P306	4.24	
30	UKP307+H2307	242.00	56	210	146	172	56	17	25	22	105	43		UK307+H2307	P307	6.02	
35	UKP308+H2308	287.00	60	220	157	186	60	17	27	25	116	46	M14	UK308+H2308	P308	6.69	
40	UKP309+H2309	356.70	67	245	176	205	67	20	30	26	128	50	M16	UK309+H2309	P309	10.3	
45	UKP310+H2310	455.40	75	275	194	232	78	20	35	30	143	55	M16	UK310+H2310	P310	13.9	
50	UKP311+H2311	565.50	80	310	213	257	80	20	38	31	154	59	M16	UK311+H2311	P311	17.7	
55	UKP312+H2312	671.00	85	334	232	270	85	25	38	36	165	62	M20	UK312+H2312	P312	20.8	
60	UKP313+H2313	762.00	90	340	241	279	90	25	38	40	174	65	M20	UK313+H2313	P313	21.9	
65	UKP315+H2315	1065.00	100	383	272	306	100	27	40	40	201	73	M22	UK315+H2315	P315	30.6	
70	UKP316+H2316	1225.00	106	400	281	316	110	27	40	45	209	78	M22	UK316+H2316	P316	37.1	
75	UKP317+H2317	1480.00	112	420	301	341	110	33	45	43	221	82	M27	UK317+H2317	P317	41.5	
80	UKP318+H2318	1634.00	118	430	310	350	110	33	43	50	235	86	M27	UK318+H2318	P318	47.1	
85	UKP319+H2319	2015.00	125	470	337	380	120	38	50	52	255	90	M30	UK319+H2319	P319	59.1	
90	UKP320+H2320	2350.00	140	490	360	402	120	36	50	55	277	97	M30	UK320+H2320	P320	76.5	
100	UKP322+H2322	3178.00	150	525	378	422	140	40	55	57	297	105	M33	UK322+H2322	P322	95.0	
110	UKP324+H2324	4122.00	160	565	428	472	140	40	55	67	320	112		UK324+H2324	P324	118.2	
115	UKP326+H2326	5430.00	180	600	458	502	140	40	55	80	355	121		UK326+H2326	P326	161.5	
125	UKP328+H2328	6695.00	200	615	478	522	140	40	55	80	390	131	M33	UK328+H2328	P328	199.4	



Lubrication fitting tap size 1/8-27 NPT

INTERCHANGES: UKP3

Ph: 800-882-8642 • Fax: 847-759-0630

AMI Bearings, Inc. **105**

HEAVY DUTY

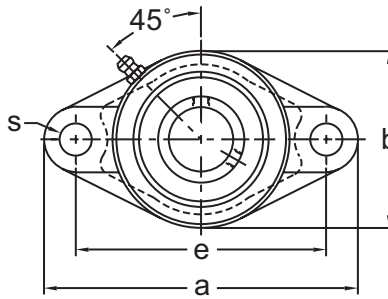

Set-Screw Locking
Wide Inner Ring
Cast Iron Housing
Insert detail-pg.134
Inch and Metric

HEAVY DUTY

Shaft Diam. (in.)	AMI Unit #	List Price	Dimensions (in.)								Bolt Size (in.)	Bearing #	Housing #	Weight (lb.)
			a	e	g	x	s	b	Z	Bi				
1	UCFL305-16	115.10	5-7/8	4-29/64	1/2	1-5/32	3/4	3-5/32	1.535	1.496	5/8	UC305-16	FL305	2.45
1-3/16	UCFL306-19	160.30	7-1/8	5-9/32	19/32	1-1/4	29/32	3-35/64	1.732	1.693	3/4	UC306-19	FL306	3.35
1-1/4	UCFL307-20	195.40	7-5/16	5-35/64	5/8	1-13/32	29/32	3-15/16	1.929	1.890	3/4	UC307-20	FL307	4.01
1-7/16	UCFL307-23											UC307-23		
1-1/2	UCFL308-24	227.40	7-7/8	6-7/32	21/32	1-9/16	29/32	4-13/32	2.205	2.047	3/4	UC308-24	FL308	5.35
1-11/16	UCFL309-27											UC309-27		
1-3/4	UCFL309-28	281.70	9-1/16	6-31/32	23/32	1-23/32	63/64	4-59/64	2.362	2.244	7/8	UC309-28	FL309	7.58
1-7/8	UCFL310-30											UC310-30		
1-15/16	UCFL310-31	335.80	9-1/2	7-23/64	3/4	1-7/8	63/64	5-33/64	2.638	2.402	7/8	UC310-31	FL310	9.59
2	UCFL311-32											UC311-32		
2-3/16	UCFL311-35	449.60	9-13/16	7-51/64	25/32	2-1/16	63/64	5-29/32	2.795	2.598	7/8	UC311-35	FL311	11.40
2-7/16	UCFL312-39	550.10	10-5/8	8-11/32	7/8	2-7/32	1-7/32	6-1/4	3.071	2.795	1	UC312-39	FL312	13.80
2-1/2	UCFL313-40	580.10	11-5/8	9-29/64	1	2-9/32	1-7/32	6-7/8	3.071	2.953	1	UC313-40	FL313	16.50
2-11/16	UCFL314-43											UC314-43		
2-3/4	UCFL314-44	700.50	12-3/8	9-27/32	1-1/8	2-13/32	1-3/8	7-15/16	3.189	3.071	1-1/8	UC314-44	FL314	20.30
2-15/16	UCFL315-47											UC315-47		
3	UCFL315-48	869.80	12-5/8	10-1/4	1-3/16	2-19/32	1-3/8	7-11/16	3.504	3.228	1-1/8	UC315-48	FL315	22.30
3-3/16	UCFL316-51	988.60	14	11-3/16	1-1/4	2-11/16	1-1/2	8-1/4	3.543	3.386	1-1/4	UC316-51	FL316	28.10
3-7/16	UCFL318-55											UC318-55		
3-1/2	UCFL318-56	1059.50	15-3/16	12-25/64	1-7/16	3	1-1/2	9-1/4	3.937	3.780	1-1/4	UC318-56	FL318	38.10
3-15/16	UCFL320-63											UC320-63		
4	UCFL320-64	1263.30	17-3/8	14-3/16	1-9/16	3-11/16	1-47/64	10-5/8	4.921	4.252	1-1/2	UC320-64	FL320	59.10
4-7/16	UCFL322-71	2195.10	18-1/2	15-23/64	1-21/32	3-25/32	1-47/64	11-13/16	5.157	4.606	1-1/2	UC322-71	FL322	73.8
Dimensions (mm)														
25	UCFL305	115.10	150	113	13	29	19	80	39	38	M16	UC305	FL305	2.45
30	UCFL306	160.30	180	134	15	32	23	90	44	43	M20	UC306	FL306	3.35
35	UCFL307	195.40	185	141	16	36	23	100	49	48	M20	UC307	FL307	4.01
40	UCFL308	227.40	200	158	17	40	23	112	56	52	M20	UC308	FL308	5.35
45	UCFL309	281.70	230	177	18	44	25	125	60	57	M22	UC309	FL309	7.58
50	UCFL310	335.80	240	187	19	48	25	140	67	61	M22	UC310	FL310	9.59
55	UCFL311	449.60	250	198	20	52	25	150	71	66	M22	UC311	FL311	11.4
60	UCFL312	550.10	270	212	22	56	31	160	78	71	M27	UC312	FL312	13.8
65	UCFL313	580.10	295	240	25	58	31	175	78	75	M27	UC313	FL313	16.5
70	UCFL314	700.50	315	250	28	61	35	185	81	78	M30	UC314	FL314	20.3
75	UCFL315	869.80	320	260	30	66	35	195	89	82	M30	UC315	FL315	22.3
80	UCFL316	988.60	355	285	32	68	38	210	90	86	M33	UC316	FL316	28.1
85	UCFL317	1059.50	370	300	32	74	38	220	100	96	M33	UC317	FL317	32.3
90	UCFL318	1236.30	385	315	36	76	38	235	100	96	M33	UC318	FL318	38.1
95	UCFL319	1372.60	405	330	40	94	41	250	121	103	M36	UC319	FL319	48.6
100	UCFL320	1627.70	440	360	40	94	44	270	125	108	M39	UC320	FL320	59.1
105	UCFL321	1942.90	440	360	40	94	44	270	127	112		UC321	FL321	62.9
110	UCFL322	2195.10	470	390	42	96	44	300	131	117		UC322	FL322	73.8
120	UCFL324	2844.10	520	430	48	110	47	330	140	126	M42	UC324	FL324	101.9
130	UCFL326	3732.80	550	460	50	115	47	360	146	135	M42	UC326	FL326	128.3
140	UCFL328	4535.00	600	500	60	125	51	400	161	145	M45	UC328	FL328	177.8

Lubrication fitting tap size 1/8-27 NPT



INTERCHANGES: UCFL3



FOUR-BOLT FLANGE UNITS

UCF 300

**Set-Screw Locking
Wide Inner Ring
Cast Iron Housing
Insert detail-pg.134
Inch and Metric**





HEAVY DUTY

Shaft Diam. (in.)	AMI Unit #	List Price	Dimensions (in.)							Bolt Size (in.)	Bearing #	Housing #	Weight (lb.)
			a	e	g	x	s	Z	Bi				
1	UCF305-16	115.10	4-5/16	3-5/32	1/2	1-5/32	5/8	1.535	1.496	1/2	UC305-16	F305	2.64
1-3/16	UCF306-19	160.30	4-15/16	3-47/64	19/32	1-1/4	5/8	1.732	1.693	1/2	UC306-19	F306	3.75
1-1/4	UCF307-20	195.40	5-5/16	3-15/16	5/8	1-13/32	3/4	1.929	1.890	5/8	UC307-20	F307	4.63
1-7/16	UCF307-23										UC307-23		
1-1/2	UCF308-24	227.40	5-7/8	4-13/32	21/32	1-9/16	3/4	2.205	2.047	5/8	UC308-24	F308	6.39
1-11/16	UCF309-27	281.70	6-5/16	4-59/64	23/32	1-23/32	3/4	2.362	2.244	5/8	UC309-27	F309	7.93
1-3/4	UCF309-28										UC309-28		
1-7/8	UCF310-30	335.80	6-7/8	5-13/64	3/4	1-7/8	29/32	2.638	2.402	3/4	UC310-30	F310	10.36
1-15/16	UCF310-31										UC310-31		
2	UCF311-32	449.60	7-5/16	5-33/64	25/32	2-1/16	29/32	2.795	2.598	3/4	UC311-32	F311	12.56
2-3/16	UCF311-35										UC311-35		
2-7/16	UCF312-39	550.10	7-11/16	5-29/32	7/8	2-7/32	29/32	3.071	2.795	3/4	UC312-39	F312	14.99
2-1/2	UCF313-40	580.10	8-3/16	6-17/32	7/8	2-9/32	29/32	3.071	2.953	3/4	UC313-40	F313	17.19
2-11/16	UCF314-43	700.50	8-7/8	7-1/64	1	2-13/32	63/64	3.189	3.071	7/8	UC314-43	F314	21.16
2-3/4	UCF314-44										UC314-44		
2-15/16	UCF315-47	869.80	9-5/16	7-1/4	1	2-19/32	63/64	3.504	3.228	7/8	UC315-47	F315	25.79
3	UCF315-48										UC315-48		
3-3/16	UCF316-51	988.60	9-13/16	7-23/32	1-1/16	2-11/16	1-7/32	3.543	3.386	1	UC316-51	F316	30.19
3-1/4	UCF317-52	1059.50	10-1/4	8-1/32	1-1/16	2-29/32	1-7/32	3.937	3.780	1	UC317-52	F317	33.50
3-7/16	UCF318-55	1777.85	11	8-1/2	1-3/16	3	1-3/8	3.937	3.780	1-1/8	UC318-55	F318	41.44
3-1/2	UCF318-56	1236.30									UC318-56		
3-3/4	UCF319-60	1372.60	11-13/32	8-31/32	1-3/16	3-11/16	1-3/8	4.764	4.055	1-1/8	UC319-60	F319	45.62
3-15/16	UCF320-63	1627.70	12-3/16	9-17/32	1-1/4	3-11/16	1-1/2	4.921	4.252	1-1/4	UC320-63	F320	54.66
4	UCF320-64										UC320-64		
4-7/16	UCF322-71	2195.10	13-3/8	10-1/2	1-3/8	3-25/32	1-5/8	5.157	4.606	1-3/8	UC322-71	F322	77.4
Dimensions (mm)													
25	UCF305	115.10	110	80	13	29	16	39	38	M14	UC305	F305	2.68
30	UCF306	160.30	125	95	15	32	16	44	43	M14	UC306	F306	3.79
35	UCF307	195.40	135	100	16	36	19	49	48	M16	UC307	F307	4.68
40	UCF308	227.40	150	112	17	40	19	56	52	M16	UC308	F308	6.47
45	UCF309	281.70	160	125	18	44	19	60	57	M16	UC309	F309	8.03
50	UCF310	335.80	175	132	19	48	23	67	61	M20	UC310	F310	10.5
55	UCF311	449.60	185	140	20	52	23	71	66		UC311	F311	12.7
60	UCF312	550.10	195	150	22	56	23	78	71	M20	UC312	F312	15.2
65	UCF313	580.10	208	166	22	58	23	78	75		UC313	F313	17.4
70	UCF314	700.50	226	178	25	61	25	81	78	M22	UC314	F314	21.4
75	UCF315	869.80	236	184	25	66	25	89	82	M22	UC315	F315	26.1
80	UCF316	988.60	250	196	27	68	31	90	86	M27	UC316	F316	30.6
85	UCF317	1059.50	260	204	27	74	31	100	96	M27	UC317	F317	33.9
90	UCF318	1236.30	280	216	30	76	35	100	96	M30	UC318	F318	41.9
95	UCF319	1372.60	290	228	30	94	35	121	103	M30	UC319	F319	46.2
100	UCF320	1627.70	310	242	32	94	38	125	108		UC320	F320	55.3
105	UCF321	1942.90	310	242	32	94	38	127	112	M36	UC321	F321	57.1
110	UCF322	2195.10	340	266	35	96	41	131	117		UC322	F322	77.4
120	UCF324	2844.10	370	290	40	110	41	140	126		UC324	F324	105.3
130	UCF326	3732.80	410	320	45	115	41	146	135	M36	UC326	F326	139.8
140	UCF328	4535.00	450	350	55	125	41	161	145		UC328	F328	194.0

Lubrication fitting tap size 1/8-27 NPT

INTERCHANGES: UCF3



Set-Screw Locking
Wide Inner Ring
Cast Iron Housing
Insert detail-pg.134
Metric

Shaft Diam. (mm)	AMI Unit #	List Price	Dimensions (mm)									Bolt Size (mm)	Bearing #	Housing #	Weight (lb.)
			a	e	s	J	k	g	f	Z	Bi				
25	UCFS305	112.90	110	80	16	7	13	22	80	32	38	M14	UC305	FS305	3.12
30	UCFS306	144.50	125	95	16	8	15	24	90	36	43	M14	UC306	FS306	4.24
35	UCFS307	172.90	135	100	19	9	16	27	100	40	48	M16	UC307	FS307	5.35
40	UCFS308	212.90	150	112	19	10	17	30	115	46	52	M16	UC308	FS308	7.36
45	UCFS309	255.60	160	125	19	11	18	33	125	49	57	M16	UC309	FS309	8.92
50	UCFS310	306.00	175	132	23	12	19	36	140	55	61	M20	UC310	FS310	11.8
55	UCFS311	392.20	185	140	23	13	20	39	150	58	66	M20	UC311	FS311	13.8
60	UCFS312	459.00	195	150	23	14	22	42	160	64	71		UC312	FS312	16.5
65	UCFS313	535.00	208	166	23	18	22	40	175	60	75		UC313	FS313	19.2
70	UCFS314	625.80	226	178	25	18	25	43	185	63	78	M22	UC314	FS314	25.0
75	UCFS315	732.80	236	184	25	18	25	48	200	71	82	M22	UC315	FS315	28.3
80	UCFS316	872.60	250	196	31	20	27	48	210	70	86	M27	UC316	FS316	31.9
85	UCFS317	1089.70	260	204	31	20	27	54	220	80	96	M27	UC317	FS317	38.4
90	UCFS318	1203.60	280	216	35	20	30	56	240	80	96	M30	UC318	FS318	45.5
95	UCFS319	1511.30	290	228	35	20	30	74	250	101	103	M30	UC319	FS319	53.3
100	UCFS320	1774.50	310	242	38	20	32	74	260	105	108	M33	UC320	FS320	60.4
105	UCFS321	2228.80	310	242	38	20	32	74	260	107	112	M33	UC321	FS321	63.6
110	UCFS322	2425.90	340	266	41	25	35	71	300	106	117	M36	UC322	FS322	82.1
120	UCFS324	3331.80	370	290	41	30	40	80	330	110	126	M36	UC324	FS324	112.8
130	UCFS326	4356.80	410	320	41	30	45	85	360	116	135		UC326	FS326	151.2
140	UCFS328	5366.10	450	350	41	30	55	95	400	131	145		UC328	FS328	214.8

Lubrication fitting tap size 1/8-27 NPT


INTERCHANGES: UCFS



FOUR-BOLT FLANGE UNITS

UGF 300

Eccentric Locking
Wide Inner Ring
Cast Iron Housing
Insert detail-pg.135
Inch and Metric


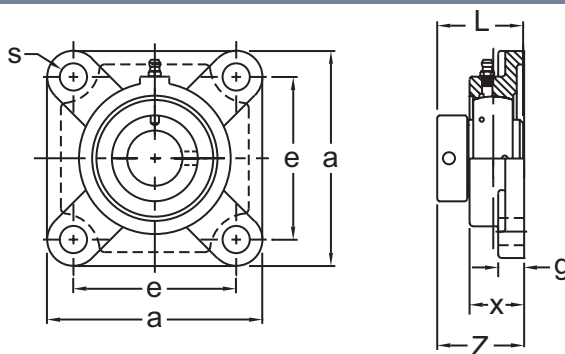


Shaft Diam (in.)	AMI Unit #	List Price	Dimensions (in.)							Bolt Size (in.)	Bearing #	Housing #	Weight (lb.)
			a	e	g	x	s	Z	L				
1-7/16	UGF307-23	209.10	5-5/16	3-15/16	5/8	1-13/32	3/4	2.098	2.031	5/8	UG307-23	F307	4.81
1-1/2	UGF308-24	316.50	5-7/8	4-13/32	21/32	1-9/16	3/4	2.374	2.248	5/8	UG308-24	F308	6.75
1-11/16	UGF309-27	338.10	6-5/16	4-59/64	23/32	1-23/32	3/4	2.515	2.311	5/8	UG309-27	F309	8.37
1-15/16	UGF310-31	398.00	6-7/8	5-13/64	3/4	1-7/8	29/32	2.755	2.622	3/4	UG310-31	F310	11.00
2-3/16	UGF311-35	494.50	7-5/16	5-33/64	25/32	2-1/16	29/32	2.961	2.874	3/4	UG311-35	F311	13.12
2-7/16	UGF312-39	555.15	7-11/16	5-29/32	7/8	2-7/32	29/32	3.205	3.126	3/4	UG312-39	F312	15.47
2-11/16	UGF314-43	818.70	8-7/8	7-1/64	1	2-13/32	63/64	3.701	3.626	7/8	UG314-43	F314	22.50
2-15/16	UGF315-47	861.85	9-5/16	7-1/4	1	2-19/32	63/64	4.003	3.937	7/8	UG315-47	F315	27.99
3	UGF315-48										UG315-48	F315	
Dimensions (mm)													
45	UGF309	338.10	160	125	18	44	19	63.9	58.7	M16	UG309	F309	8.37
50	UGF310	398.00	175	132	19	48	23	70	66.6	M20	UG310	F310	11.00
55	UGF311	494.50	185	140	20	52	23	75.2	73.0	M20	UG311	F311	13.12
60	UGF312	555.15	195	150	22	56	23	81.4	79.4	M20	UG312	F312	15.47
70	UGF314	818.70	226	178	25	61	25	94	92.1	M22	UG314	F314	22.50
75	UGF315	861.85	236	184	25	66	25	101.7	100.0	M22	UG315	F315	27.99
90	UGF318	1246.70	280	216	30	76	35	116.3	115.9	M30	UG318	F318	45.30

Lubrication fitting tap size 1/8-27 NPT

INTERCHANGES: UELF3

HEAVY DUTY



Set-Screw Locking
Wide Inner Ring
Cast Iron Housing
Insert detail-pg.134
Inch and Metric

HEAVY DUTY

Shaft Diam (in.)	AMI Unit #	List Price	Dimensions (in.)							Bolt Size (in.)	Bearing #	Housing #	Weight (lb.)
			a	e	g	x	s	Z	Bi				
1	UCFU305-16	177.50	4-5/8	3-1/2	9/16	1-1/2	9/16	1.721	1.496	1/2	UC305-16	F-U305	4.0
1-3/16	UCFU306-19	233.20	4-15/16	3-13/16	5/8	1-21/32	9/16	2.048	1.693	1/2	UC306-19	F-U306	5.0
1-1/4	UCFU307-20	248.90	5-1/8	4	5/8	1-13/16	9/16	2.252	1.890	1/2	UC307-20	F-U307	6.2
1-7/16	UCFU307-23										UC307-23		6.0
1-1/2	UCFU308-24	290.90	6	4-5/8	5/8	1-31/32	3/4	2.468	2.047	5/8	UC308-24	F-U308	8.4
1-11/16	UCFU309-27	351.40	6-1/4	4-7/8	11/16	2-13/64	3/4	2.748	2.244	5/8	UC309-27	F-U309	10.6
1-3/4	UCFU309-28										UC309-28		10.8
1-7/8	UCFU310-30	417.40	6-1/2	5-1/8	11/16	2-13/32	3/4	2.968	2.402	5/8	UC310-30	F-U310	12.4
1-15/16	UCFU310-31										UC310-31		12.2
2	UCFU311-32	523.80	7-5/16	5-3/4	3/4	2-9/16	29/32	3.220	2.598	3/4	UC311-32	F-U311	16.8
2-3/16	UCFU311-35										UC311-35		16.2
2-7/16	UCFU312-39	638.50	7-5/8	6	3/4	2-13/16	29/32	3.469	2.795	3/4	UC312-39	F-U312	18.2
2-11/16	UCFU314-43										UC314-43	F-U314	24.8
2-3/4	UCFU314-44	870.20	8-7/8	7	7/8	3-7/16	1-1/16	4.115	3.071	7/8	UC314-44		24.5
2-15/16	UCFU315-47	1181.30	9-1/16	7-1/4	7/8	3-7/16	1-1/16	4.312	3.228	7/8	UC315-47	F-U315	32.6
3	UCFU315-48										UC315-48		32.2
Dimensions (mm)													
25	UCFU305	177.50	117.5	88.9	14	38	14	43.7	38	M12	UC305	F-U305	3.8
30	UCFU306	233.20	125.5	96.8	16	42	14	52.0	43		UC306	F-U306	5.0
35	UCFU307	248.90	130	101.6	16	46	14	57.2	48		UC307	F-U307	6.0
40	UCFU308	290.90	152.5	117.4	16	50	19	62.7	52	M16	UC308	F-U308	8.4
45	UCFU309	351.40	159	123.8	17.5	56	19	69.8	57		UC309	F-U309	10.6
50	UCFU310	417.40	165	130.2	17.5	61	19	75.4	61		UC310	F-U310	12.0
55	UCFU311	523.80	185.5	146.1	19	65	23	81.8	66	M20	UC311	F-U311	16.2
60	UCFU312	638.50	193.5	152.4	19	71.5	23	88.1	71	M20	UC312	F-U312	18.4
70	UCFU314	870.20	225.5	177.8	22	87.5	27	104.5	78	M24	UC314	F-U314	24.5
75	UCFU315	1181.30	230	184.1	22	87.5	27	109.5	82	M24	UC315	F-U315	32.4

Lubrication fitting tap size 1/8-27 NPT


INTERCHANGES: F-U3



EXPANSION FOUR-BOLT FLANGE UNITS

UCFE-U 300

Set-Screw Locking
Wide Inner Ring
Cast Iron Housing
Expansion Type
Insert detail-pg.134
Inch and Metric

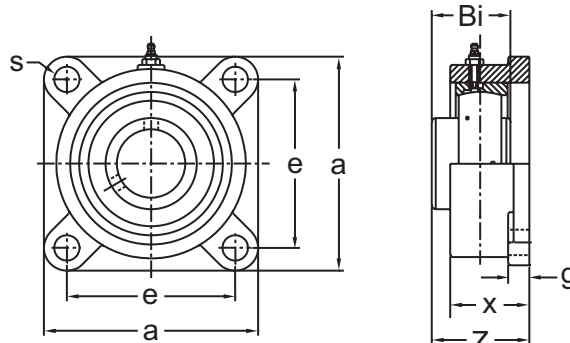


Shaft Diam (in.)	AMI Unit #	List Price	Dimensions (in.)							Bolt Size (in.)	Bearing #	Housing #	Weight (lb.)
			a	e	g	x	s	Z	Bi				
1-1/4 1-7/16	UCFEU307-20 UCFEU307-23	414.00	5-1/8	4	5/8	1-13/16	9/16	2.252	1.890	1/2	UC307-20 UC307-23	FE-U307	6.2 6.0
1-11/16 1-3/4	UCFEU309-27 UCFEU309-28	518.60	6-1/4	4-7/8	11/16	2-13/64	3/4	2.748	2.244	5/8	UC309-27 UC309-28	FE-U309	10.6 10.8
1-7/8 1-15/16	UCFEU310-30 UCFEU310-31	616.90	6-1/2	5-1/8	11/16	2-13/32	3/4	2.968	2.402	5/8	UC310-30 UC310-31	FE-U310	13.2 13.0
2 2-3/16	UCFEU311-32 UCFEU311-35	761.40	7-5/16	5-3/4	3/4	2-9/16	29/32	3.220	2.598	3/4	UC311-32 UC311-35	FE-U311	17.4 16.8
2-7/16	UCFEU312-39	865.80	7-5/8	6	3/4	2-13/16	29/32	3.469	2.795	3/4	UC312-39	FE-U312	18.6
2-11/16 2-3/4	UCFEU314-43 UCFEU314-44	1030.50	8-7/8	7	7/8	3-7/16	1-1/16	4.115	3.071	7/8	UC314-43 UC314-44	FE-U314	31.6 31.4
2-15/16 3	UCFEU315-47 UCFEU315-48	1523.40	9-1/16	7-1/4	7/8	3-7/16	1-1/16	4.312	3.228	7/8	UC315-47 UC315-48	FE-U315	32.2 31.8
Dimensions (mm)													
35	UCFEU307	414.00	130	101.6	16	46	14	57.2	48	M12	UC307	FE-U307	6.0
45	UCFEU309	518.60	159	123.8	17.5	56	19	69.8	57	M16	UC309	FE-U309	10.6
50	UCFEU310	616.90	165	130.2	17.5	61	19	75.4	61	M16	UC310	FE-U310	12.8
55	UCFEU311	761.40	185.5	146.1	19	65	23	81.8	66	M20	UC311	FE-U311	16.8
60	UCFEU312	865.80	193.5	152.4	19	71.5	23	88.1	71	M20	UC312	FE-U312	18.8
70	UCFEU314	1030.50	225.5	177.8	22	87.5	27	104.5	78	M24	UC314	FE-U314	31.4
75	UCFEU315	1523.40	230	184.1	22	87.5	27	109.5	82	M24	UC315	FE-U315	32.0

Lubrication fitting tap size 1/8-27 NPT

INTERCHANGES: FE-U3

HEAVY DUTY

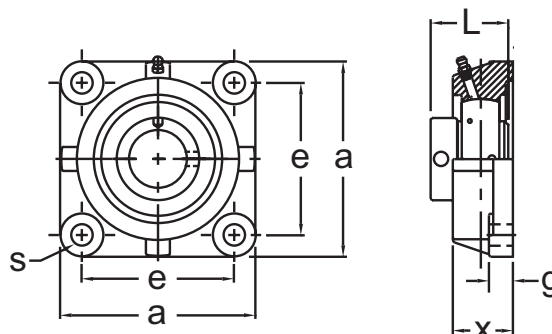

Eccentric Locking
Wide Inner Ring
Cast Iron Housing
Insert detail-pg.135
Inch and Metric

Shaft Diam. (in.)	AMI Unit #	List Price	Dimensions (in.)						Bolt Size (in.)	Bearing #	Housing #	Weight (lb.)
			a	e	g	x	s	L				
1-7/16	UGCJO307-23	259.70	5-1/8	4	5/8	1-37/64	9/16	2.031	1/2	UG307-23	CJO307	5.32
1-1/2	UGCJO308-24	327.60	5-23/64	4-1/8	5/8	1-47/64	5/8	2.248	9/16	UG308-24	CJO308	6.46
1-11/16	UGCJO309-27	375.50	5-5/8	4-3/8	43/64	1-55/64	5/8	2.311	9/16	UG309-27	CJO309	7.76
1-15/16	UGCJO310-31	437.65	6-1/2	5-1/8	43/64	2-3/32	11/16	2.622	5/8	UG310-31	CJO310	11.04
2-3/16	UGCJO311-35	581.45	7	5-5/8	43/64	2-19/64	11/16	2.874	5/8	UG311-35	CJO311	13.98
2-7/16	UGCJO312-39	631.65	7-1/2	5-7/8	3/4	2-9/16	13/16	3.126	3/4	UG312-39	CJO312	15.97
2-11/16	UGCJO314-43	903.00	8-55/64	7	51/64	2-27/32	15/16	3.626	7/8	UG314-43	CJO314	26.28
2-15/16 3	UGCJO315-47 UGCJO315-48	942.80	9-1/4	7-1/4	7/8	3-5/64	15/16	3.937	7/8	UG315-47 UG315-48	CJO315	31.82
Dimensions (mm)												
45	UGCJO309	375.50	143	111.1	17	47	16.0	58.7	M14	UG309	CJO309	7.76
50	UGCJO310	437.65	165	130.2	17	53	17.5	66.6	M16	UG310	CJO310	11.04
55	UGCJO311	581.45	178	142.9	17	58	17.5	73.0	M16	UG311	CJO311	13.98
60	UGCJO312	631.65	190	149.2	19	65	20.5	79.4	M20	UG312	CJO312	15.97
70	UGCJO314	903.00	225	177.8	20	72	24.0	92.1	M22	UG314	CJO314	26.28
75	UGCJO315	942.80	235	184.2	22	78	24.0	100.0	M22	UG315	CJO315	31.82
90	UGCJO318	1507.70	281	215.9	28	84	27.0	115.9	M24	UG318	CJO318	49.74

Lubrication fitting tap size 1/8-27 NPT


INTERCHANGES: RCJO



FOUR-BOLT FLANGE UNITS

UCCJO 300



Set-Screw Locking
Wide Inner Ring
Cast Iron Housing
Insert detail-pg.134
Inch and Metric

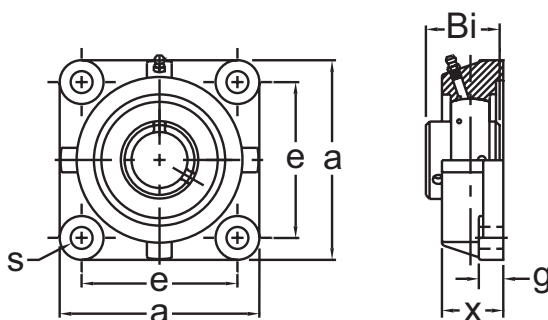

Shaft Diam. (in.)	AMI Unit #	List Price	Dimensions (in.)						Bolt Size (in.)	Bearing #	Housing #	Weight (lb.)
			a	e	g	x	s	Bi				
1-3/16	UCCJO306-19	127.70	4-23/32	3-5/8	9/16	1-1/2	9/16	1.693	1/2	UC306-19	CJO306	4.37
1-1/4	UCCJO307-20	141.20	5-1/8	4	5/8	1-37/64	9/16	1.890	1/2	UC307-20	CJO307	5.14
1-7/16	UCCJO307-23									UC307-23	CJO307	
1-1/2	UCCJO308-24	192.00	5-23/64	4-1/8	5/8	1-47/64	5/8	2.047	9/16	UC308-24	CJO308	6.10
1-11/16	UCCJO309-27	204.20	5-5/8	4-3/8	43/64	1-55/64	5/8	2.244	9/16	UC309-27	CJO309	7.32
1-3/4	UCCJO309-28									UC309-28	CJO309	
1-7/8	UCCJO310-30	276.60	6-1/2	5-1/8	43/64	2-3/32	11/16	2.402	5/8	UC310-30	CJO310	10.40
1-15/16	UCCJO310-31									UC310-31	CJO310	
2	UCCJO311-32	335.90	7	5-5/8	43/64	2-19/64	11/16	2.598	5/8	UC311-32	CJO311	13.42
2-3/16	UCCJO311-35									UC311-35	CJO311	
2-7/16	UCCJO312-39	361.40	7-1/2	5-7/8	3/4	2-9/16	13/16	2.795	3/4	UC312-39	CJO312	15.49
2-11/16	UCCJO314-43	725.75	8-55/64	7	51/64	2-27/32	15/16	3.071	7/8	UC314-43	CJO314	24.94
2-3/4	UCCJO314-44	640.30								UC314-44	CJO314	
2-15/16	UCCJO315-47	739.80	9-1/4	7-1/4	7/8	3-5/64	15/16	3.228	7/8	UC315-47	CJO315	29.62
3	UCCJO315-48									UC315-48	CJO315	
3-7/16	UCCJO318-55	1985.30	11-1/16	8-1/2	1-7/64	3-5/16	1-1/16	3.780	1	UC318-55	CJO318	46.12
3-1/2	UCCJO318-56	1340.00								UC318-56	CJO318	
3-15/16	UCCJO320-63	2252.40	12-7/16	9-17/32	1-19/64	3-13/16	1-3/16	4.252	1-1/8	UC320-63	CJO320	64.82
4	UCCJO320-64									UC320-64	CJO320	
Dimensions (mm)												
30	UCCJO306	127.70	120	92.1	14	38	14.5	43	M12	UC306	CJO306	4.39
35	UCCJO307	141.20	130	101.6	16	40	14.5	48	M12	UC307	CJO307	5.16
40	UCCJO308	192.00	136	104.8	16	44	16.0	52	M14	UC308	CJO308	6.13
45	UCCJO309	204.20	143	111.1	17	47	16.0	57	M14	UC309	CJO309	7.35
50	UCCJO310	276.60	165	130.2	17	53	17.5	61	M16	UC310	CJO310	10.44
55	UCCJO311	335.90	178	142.9	17	58	17.5	66	M16	UC311	CJO311	13.48
60	UCCJO312	361.40	190	149.2	19	65	20.5	71	M20	UC312	CJO312	15.56
70	UCCJO314	640.30	225	177.8	20	72	24.0	78	M22	UC314	CJO314	25.04
75	UCCJO315	739.80	235	184.2	22	78	24.0	82	M22	UC315	CJO315	29.80
90	UCCJO318	1340.00	281	215.9	28	84	27.0	96	M24	UC318	CJO318	46.34
100	UCCJO320	2252.40	316	242.0	33	97	30.0	108	M27	UC320	CJO320	65.12

Lubrication fitting tap size 1/8-27 NPT

HEAVY DUTY



**Tapered Adapter Sleeve
Wide Inner Ring
Cast Iron Housing
Insert detail-pg.136
Inch and Metric**

HEAVY DUTY

Shaft Diam. (in.)	AMI Unit #	List Price	Dimensions (in.)							Bolt Size (in.)	Bearing #	Housing #	Weight (lb.)
			a	e	g	x	s	Z	L				
3/4	UKF305+HE2305	166.20	4-5/16	3-5/32	1/2	1-5/32	5/8	1.457	1.379	1/2	UK305+HE2305	F305	2.68
7/8	UKF306+HS2306	204.50	4-15/16	3-47/64	19/32	1-1/4	5/8	1.595	1.496	1/2	UK306+HS2306	F306	3.79
15/16	UKF306+HA2306										UK306+HA2306		
1	UKF306+HE2306										UK306+HE2306		
1-1/8	UKF307+HS2307	242.00	5-5/16	3-15/16	5/8	1-13/32	3/4	1.752	1.693	5/8	UK307+HS2307	F307	4.68
1-3/16	UKF307+HA2307										UK307+HA2307		
1-1/4	UKF308+HE2308	287.00	5-7/8	4-13/32	21/32	1-9/16	3/4	1.969	1.811	5/8	UK308+HE2308	F308	6.69
1-5/16	UKF308+HA2308										UK308+HA2308		
1-3/8	UKF308+HS2308										UK308+HS2308		
1-7/16	UKF309+HA2309	356.70	6-5/16	4-59/64	23/32	1-23/32	3/4	2.146	1.969	5/8	UK309+HA2309	F309	8.03
1-1/2	UKF309+HE2309										UK309+HE2309		
1-5/8	UKF309+HS2309										UK309+HS2309		
1-11/16	UKF310+HA2310	455.40	6-7/8	5-13/64	3/4	1-7/8	29/32	2.362	2.165	3/4	UK310+HA2310	F310	10.70
1-3/4	UKF310+HE2310										UK310+HE2310		
1-7/8	UKF311+HS2311	565.50	7-5/16	5-33/64	25/32	2-1/16	29/32	2.503	2.323	3/4	UK311+HS2311	F311	12.70
1-15/16	UKF311+HA2311										UK311+HA2311		
2	UKF311+HE2311										UK311+HE2311		
2-1/16	UKF312+HA2312	671.00	7-11/16	5-29/32	7/8	2-7/32	29/32	2.717	2.441	3/4	UK312+HA2312	F312	15.00
2-1/8	UKF312+HS2312										UK312+HS2312		
2-3/16	UKF313+HA2313	762.00	8-3/16	6-17/32	7/8	2-9/32	29/32	2.795	2.559	3/4	UK313+HA2313	F313	17.20
2-1/4	UKF313+HE2313										UK313+HE2313		
2-3/8	UKF313+HS2313										UK313+HS2313		
2-7/16	UKF315+HA2315	1065.00	9-5/16	7-1/4	1	2-19/32	63/64	3.189	2.874	7/8	UK315+HA2315	F315	26.30
2-1/2	UKF315+HE2315										UK315+HE2315		
2-11/16	UKF316+HA2316	1225.00	9-13/16	7-23/32	1-1/16	2-11/16	1-7/32	3.287	3.071	1	UK316+HA2316	F316	31.00
2-3/4	UKF316+HE2316										UK316+HE2316		
2-15/16	UKF317+HA2317	1480.00	10-1/4	8-1/32	1-1/16	2-29/32	1-7/32	3.662	3.228	1	UK317+HA2317	F317	33.70
3	UKF317+HE2317										UK317+HE2317		
3-1/8	UKF318+HS2318	1634.00	11	8-1/2	1-3/16	3	1-3/8	3.681	3.386	1-1/8	UK318+HS2318	F318	42.40
3-3/16	UKF318+HA2318										UK318+HA2318		
3-1/4	UKF319+HE2319	2015.00	11-13/32	8-31/32	1-3/16	3-11/16	1-3/8	4.370	3.543	1-1/8	UK319+HE2319	F319	46.40
3-7/16	UKF320+HA2320	2350.00	12-3/16	9-17/32	1-1/4	3-11/16	1-1/2	4.528	3.819	1-1/4	UK320+HA2320	F320	55.30
3-1/2	UKF320+HE2320										UK320+HE2320		
4	UKF322+HE2322	3178.00	13-3/8	10-1/2	1-3/8	3-25/32	1-5/8	4.764	4.134	1-3/8	UK322+HE2322	F322	77.60
Dimensions (mm)													
20	UKF305+H2305	166.20	110	80	13	29	16	37	35	M14	UK305+H2305	F305	2.68
25	UKF306+H2306	204.50	125	95	15	32	16	40.5	38	M14	UK306+H2306	F306	3.79
30	UKF307+H2307	242.00	135	100	16	36	19	44.5	43	M16	UK307+H2307	F307	4.68
35	UKF308+H2308	287.00	150	112	17	40	19	50	46	M16	UK308+H2308	F308	6.69
40	UKF309+H2309	356.70	160	125	18	44	19	54.5	50	M16	UK309+H2309	F309	8.03
45	UKF310+H2310	455.40	175	132	19	48	23	60	55	M20	UK310+H2310	F310	10.7
50	UKF311+H2311	565.50	185	140	20	52	23	63.5	59		UK311+H2311	F311	12.7
55	UKF312+H2312	671.00	195	150	22	56	23	69	62	M20	UK312+H2312	F312	15.0
60	UKF313+H2313	762.00	208	166	22	58	23	71	65		UK313+H2313	F313	17.2
65	UKF315+H2315	1065.00	236	184	25	66	25	81	73	M22	UK315+H2315	F315	26.3
70	UKF316+H2316	1225.00	250	196	27	68	31	83.5	78	M27	UK316+H2316	F316	31.0
75	UKF317+H2317	1480.00	260	204	27	74	31	92	82	M27	UK317+H2317	F317	33.7
80	UKF318+H2318	1634.00	280	216	30	76	35	93.5	86	M33	UK318+H2318	F318	42.4
85	UKF319+H2319	2015.00	290	228	30	94	35	111	90	M33	UK319+H2319	F319	46.4
90	UKF320+H2320	2350.00	310	242	32	94	38	115	97	M36	UK320+H2320	F320	55.3
100	UKF322+H2322	3178.00	340	266	35	96	41	121	105		UK322+H2322	F322	77.6
110	UKF324+H2324	4122.00	370	290	40	110	41	130	112	M36	UK324+H2324	F324	104.2
115	UKF326+H2326	5430.00	410	320	45	115	41	134	121		UK326+H2326	F326	140.5
125	UKF328+H2328	6695.00	450	350	55	125	41	148	131	M36	UK328+H2328	F328	195.0

Lubrication fitting tap size 1/8-27 NPT



INTERCHANGES: UKF3



TAKE-UP UNITS

UCT 300

Set-Screw Locking
Wide Inner Ring
Cast Iron Housing
Insert detail-pg.134
Metric-Call for Inch Sizes


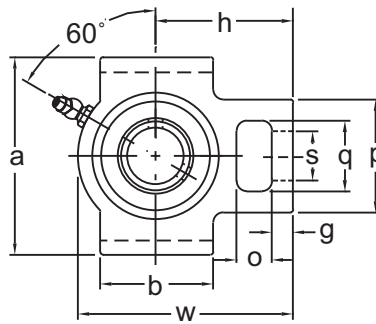


Shaft Diam. (mm)	AMI Unit #	List Price	Dimensions (mm)															Bearing #	Housing #	Weight (lb.)
			o	g	p	q	s	b	k	e	a	w	J	x	h	Bi	Z			
25	UCT305	112.90	16	12	65	36	26	65	12	80	89	122	36	26	76	38	36.0	UC305	T305	2.23
30	UCT306	144.50	18	14	70	41	28	74	16	90	100	137	41	28	85	43	40.0	UC306	T306	4.01
35	UCT307	172.90	20	15	75	45	30	80	16	100	111	150	45	32	94	48	45.0	UC307	T307	5.35
40	UCT308	212.90	22	17	83	50	32	89	18	112	124	162	50	34	100	52	50.0	UC308	T308	6.69
45	UCT309	255.60	24	18	90	55	34	97	18	125	138	178	55	38	110	57	54.0	UC309	T309	9.14
50	UCT310	306.00	27	20	98	61	37	106	20	140	151	191	61	40	117	61	59.0	UC310	T310	11.6
55	UCT311	392.20	29	21	105	66	39	115	22	150	163	207	66	44	127	66	63.0	UC311	T311	14.27
60	UCT312	459.00	31	23	113	71	41	123	22	160	178	220	71	46	135	71	68.0	UC312	T312	17.0
65	UCT313	535.00	32	25	116	70	43	134	26	170	190	238	80	50	146	75	70.0	UC313	T313	20.5
70	UCT314	625.80	36	25	130	85	46	140	26	180	202	252	90	52	155	78	71.0	UC314	T314	25.0
75	UCT315	732.80	36	25	132	85	46	150	26	192	216	262	90	55	160	82	77.5	UC315	T315	29.0
80	UCT316	872.60	42	28	150	98	53	160	30	204	230	282	102	60	174	86	82.0	UC316	T316	34.8
85	UCT317	1089.70	42	30	152	98	53	170	32	214	240	298	102	64	183	96	88.0	UC317	T317	43.1
90	UCT318	1203.60	46	30	160	106	57	175	32	228	255	312	110	66	192	96	89.0	UC318	T318	47.3
95	UCT319	1511.30	46	31	165	106	57	180	35	240	270	322	110	72	197	103	98.0	UC319	T319	54.4
100	UCT320	1774.50	48	32	175	115	59	200	35	260	290	345	120	75	210	108	103.5	UC320	T320	68.3
105	UCT321	2228.80	48	32	175	115	59	200	35	260	290	345	120	75	210	112	105.5	UC321	T321	67.4
110	UCT322	2425.90	52	38	185	125	65	215	38	285	320	385	130	80	235	117	111.0	UC322	T322	86.5
120	UCT324	3331.80	60	42	210	140	70	230	45	320	355	432	140	90	267	126	120.0	UC324	T324	121.8
130	UCT326	4356.80	65	45	220	150	75	240	50	350	385	465	150	100	285	135	131.0	UC326	T326	152.6
140	UCT328	5366.10	70	50	230	160	80	255	50	380	415	515	155	100	315	145	136.0	UC328	T328	185.6

Lubrication fitting tap size 1/8-27 NPT

INTERCHANGES: UCT3

HEAVY DUTY



Set-Screw Locking
Wide Inner Ring
Cast Iron Housing
Insert detail-pg.134
Metric-Call for Inch Sizes

Shaft Diam. (mm)	AMI Unit #	List Price	Dimensions (mm)			Bearing #	Housing #	Weight (lb.)
			a	x	Bi			
25	UCC305	112.90	90	26	38	UC305	C305	2.45
30	UCC306	144.50	100	28	43	UC306	C306	2.9
35	UCC307	172.90	110	32	48	UC307	C307	4.01
40	UCC308	212.90	120	34	52	UC308	C308	4.91
45	UCC309	255.60	130	38	57	UC309	C309	6.02
50	UCC310	306.00	140	40	61	UC310	C310	7.36
55	UCC311	392.20	150	44	66	UC311	C311	8.70
60	UCC312	459.00	160	46	71	UC312	C312	10.7
65	UCC313	535.00	170	50	75	UC313	C313	12.7
70	UCC314	625.80	180	52	78	UC314	C314	14.7
75	UCC315	732.80	190	55	82	UC315	C315	17.2
80	UCC316	872.60	200	60	86	UC316	C316	19.9
85	UCC317	1089.70	215	64	96	UC317	C317	25.0
90	UCC318	1203.60	225	66	96	UC318	C318	27.5
95	UCC319	1511.30	240	72	103	UC319	C319	33.9
100	UCC320	1774.50	260	75	108	UC320	C320	42.8
105	UCC321	2228.80	260	75	112	UC321	C321	42.2
110	UCC322	2425.90	300	80	117	UC322	C322	62.7
120	UCC324	3331.80	320	90	126	UC324	C324	78.1
130	UCC326	4356.80	340	100	135	UC326	C326	94.1
140	UCC328	5366.10	360	100	145	UC328	C328	109.1




NOTE: Recommended housing bore:

Rotating Shaft: nominal +0.001" - +0.003" (+0.025 mm - +0.076 mm).

Stationary Shaft: nominal +0.000" - -0.002" (+0.000 mm - -0.050 mm)





Lubrication fitting tap size 1/8-27 NPT


INTERCHANGES: UCC3

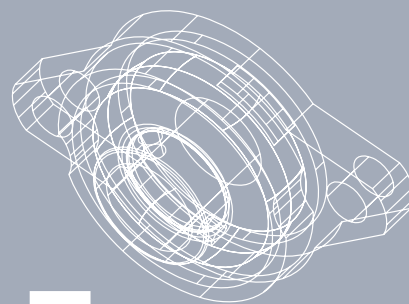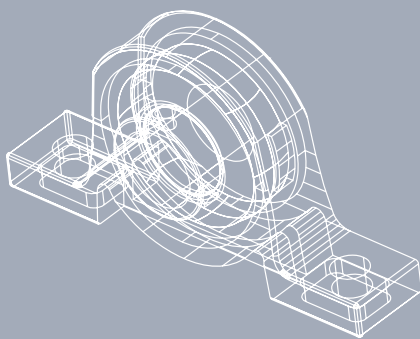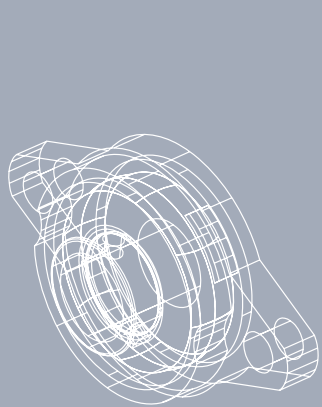

AMI


Silver Series

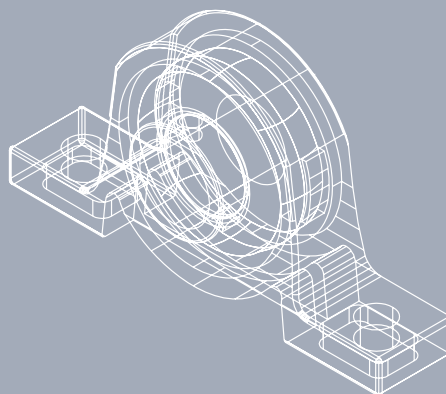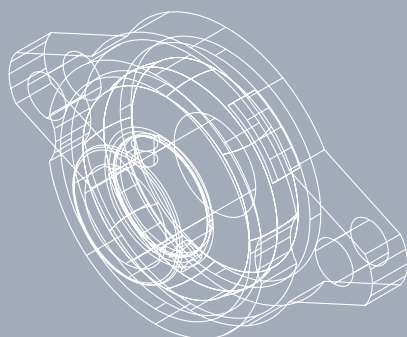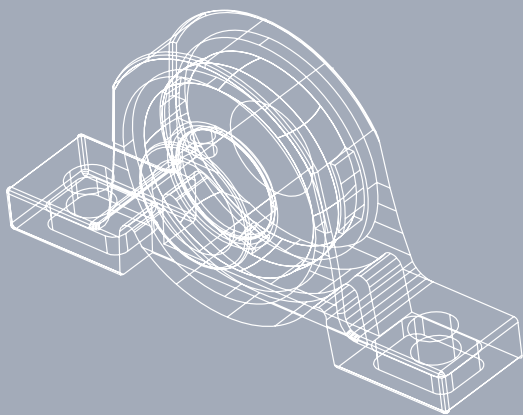

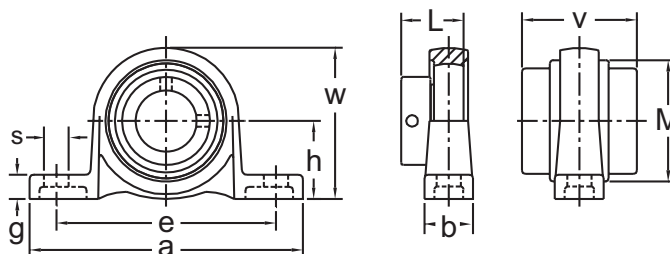


Eccentric Locking
Extra Narrow Inner Ring
ZDC Alloy Housing
52100 Bearing Steel
Non-Relube
Insert detail-pg.137
Metric

Shaft Diam. (mm)	AMI Unit #	List Price		Dimensions (mm)										Bolt Size (mm)	Bearing #	Housing #	Weight (lb.)
		No Cover	With Cover C (CE)	h	a	e	b	s	g	w	L	v	M				
10	UP000	41.50	45.65	18	67	53	16	7	6	35	17.5	33	29	M6	U000	P000	0.17
12	UP001	42.50	46.65	19	71	56	16	7	6	38	17.5	33	31		U001	P001	0.20
15	UP002	45.30	49.45	22	80	63	16	7	7	43	18.5	34	35		U002	P002	0.28
17	UP003	48.80	53.05	24	85	67	18	7	7	47	20.5	38	38	M6	U003	P003	0.35
20	UP004	51.80	56.05	28	100	80	20	10	9	55	24.5	46	45		U004	P04-5	0.52
25	UP005	59.40	63.65	32	112	90	20	10	10	62	25.5	47	50		U005	P05-6	0.66
30	UP006	72.20	78.20	36	132	106	26	13	11	70	26.5	50	58	M10	U006	P06-7	1.01

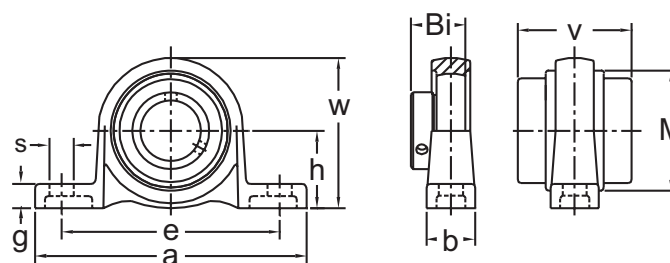

Set-Screw Locking
Extra Narrow Inner Ring
ZDC Alloy Housing
52100 Bearing Steel
Non-Relube
Insert detail-pg.137
Metric

Shaft Diam. (mm)	AMI Unit #	List Price		Dimensions (mm)										Bolt Size (mm)	Bearing #	Housing #	Weight (lb.)
		No Cover	With Cover C (CE)	h	a	e	b	s	g	w	Bi	v	M				
10	KP000	41.50	45.65	18	67	53	16	7	6	35	14	33	29	M6	K000	P000	0.17
12	KP001	45.30	49.45	19	71	56	16	7	6	38	14.5	33	31		K001	P001	0.20
15	KP002	48.60	52.75	22	80	63	16	7	7	43	16.5	34	35		K002	P002	0.28
17	KP003	52.95	57.25	24	85	67	18	7	7	47	17.5	38	38	M6	K003	P003	0.35
20	KP004	60.60	64.75	28	100	80	20	10	9	55	21	46	45		K004	P04-5	0.52
25	KP005	69.80	74.00	32	112	90	20	10	10	62	22.5	47	50		K005	P05-6	0.66
30	KP006	83.00	89.00	36	132	106	26	13	11	70	24.5	50	58	M10	K006	P06-7	1.01

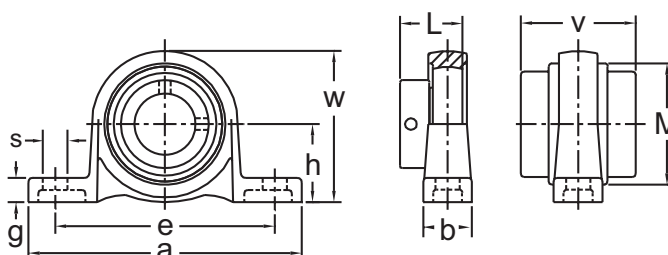


Eccentric Locking
Extra Narrow Inner Ring
ZDC Alloy with Electroless Chromate Finish Housing
440C Stainless Steel Bearing
Non-Relube
Insert detail-pg.137
Metric

Shaft Diam. (mm)	AMI Unit #	List Price		Dimensions (mm)										Bolt Size (mm)	Bearing #	Housing #	Weight (lb.)
		No Cover	With Cover C (CE)	h	a	e	b	s	g	w	L	v	M				
10	MUP000	98.75	102.30	18	67	53	16	7	6	35	17.5	33	29	M6	MU000	P000Z3	0.17
12	MUP001	103.60	106.90	19	71	56	16	7	6	38	17.5	33	31		MU001	P001Z3	0.20
15	MUP002	105.25	109.40	22	80	63	16	7	7	43	18.5	34	35		MU002	P002Z3	0.28
17	MUP003	120.70	125.10	24	85	67	18	7	7	47	20.5	38	38	M6	MU003	P003Z3	0.35
20	MUP004	131.80	135.30	28	100	80	20	10	9	55	24.5	46	45		MU004	P04-5Z3	0.52
25	MUP005	147.75	151.50	32	112	90	20	10	10	62	25.5	47	50		MU005	P05-6Z3	0.66
30	MUP006	194.60	200.70	36	132	106	26	13	11	70	26.5	50	58	M10	MU006	P06-7Z3	1.01



SILVER SERIES TWO-BOLT FLANGE UNITS W/COVERS UFL / KFL / MUFL 000


Eccentric Locking
Extra Narrow Inner Ring
ZDC Alloy Housing
52100 Bearing Steel
Non-Relube
Insert detail-pg.137
Metric

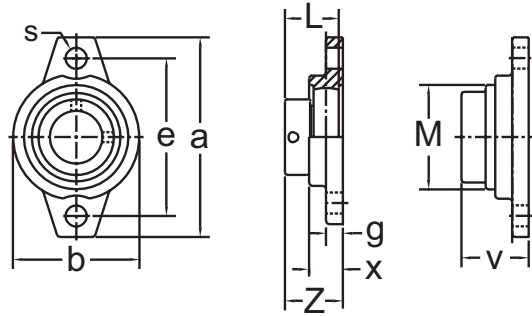

Unit w/cover

Shaft Diam. (mm)	AMI Unit #	List Price		Dimensions (mm)										Bolt Size (mm)	Bearing #	Housing #	Weight (lb.)
		No Cover	With Cover C (CE)	a	e	g	x	s	b	Z	L	v	M				
10	UFL000	41.50	45.65	60	45	5.5	11.5	7	36	19	17.5	22	29	M6	U000	FL000	0.14
12	UFL001	42.50	46.65	63	48	5.5	11.5	7	38	19	17.5	22	31		U001	FL001	0.17
15	UFL002	45.30	49.45	67	53	6.5	13	7	42	20.5	18.5	24	35		U002	FL002	0.22
17	UFL003	48.80	53.05	71	56	7	14	7	46	22.5	20.5	26	38	M6	U003	FL003	0.29
20	UFL004	51.80	56.05	90	71	8	16	10	55	26.5	24.5	31	45	M8	U004	FL04-5	0.46
25	UFL005	59.40	63.65	95	75	8	16	10	60	27.5	25.5	32	50	M8	U005	FL05-6	0.54
30	UFL006	72.20	78.20	112	85	9	18	13	70	29	26.5	34	58	M10	U006	FL06-7	0.79
35	UFL007	83.85	90.10	122	95	10	20	13	80	32.5	29.5	-	-		U007	FL07-8	1.10


Set-Screw Locking
Extra Narrow Inner Ring
ZDC Alloy Housing
52100 Bearing Steel
Non-Relube
Insert detail-pg.137
Metric

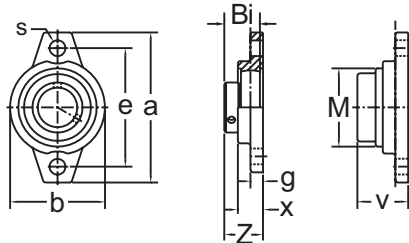

Unit w/cover

Shaft Diam. (mm)	AMI Unit #	List Price		Dimensions (mm)										Bolt Size (mm)	Bearing #	Housing #	Weight (lb.)
		No Cover	With Cover C (CE)	a	e	g	x	s	b	Z	Bi	v	M				
10	KFL000	41.50	45.65	60	45	5.5	11.5	7	36	15.5	14	22	29	M6	K000	FL000	0.14
12	KFL001	45.30	49.45	63	48	5.5	11.5	7	38	16	14.5	22	31		K001	FL001	0.17
15	KFL002	48.60	52.75	67	53	6.5	13	7	42	18.6	16.5	24	35		K002	FL002	0.22
17	KFL003	52.95	57.25	71	56	7	14	7	46	19.5	17.5	26	38	M6	K003	FL003	0.29
20	KFL004	60.60	64.75	90	71	8	16	10	55	23	21	31	45	M8	K004	FL04-5	0.46
25	KFL005	69.80	74.00	95	75	8	16	10	60	24.5	22.5	32	50	M8	K005	FL05-6	0.54
30	KFL006	83.00	89.00	112	85	9	18	13	70	27	24.5	34	58	M10	K006	FL06-7	0.79

Eccentric Locking
Extra Narrow Inner Ring
ZDC Alloy with Electroless Chromate Finish Housing
440C Stainless Steel Bearing
Non-Relube
Insert detail-pg.137
Metric

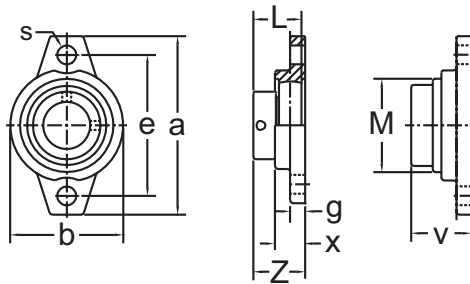


Unit w/cover

Shaft Diam. (mm)	AMI Unit #	List Price		Dimensions (mm)										Bolt Size (mm)	Bearing #	Housing #	Weight (lb.)
		No Cover	With Cover C (CE)	a	e	g	x	s	b	Z	Bi	v	M				
10	MUFL000	41.50	45.65	60	45	5.5	11.5	7	36	15.5	14	22	29	M6	MU000	FL000Z3	0.14
12	MUFL001	45.30	49.45	63	48	5.5	11.5	7	38	16	14.5	22	31		MU001	FL001Z3	0.17
15	MUFL002	48.60	52.75	67	53	6.5	13	7	42	18.6	16.5	24	35		MU002	FL002Z3	0.22
17	MUFL003	52.95	57.25	71	56	7	14	7	46	19.5	17.5	26	38	M6	MU003	FL003Z3	0.29
20	MUFL004	60.60	64.75	90	71	8	16	10	55	23	21	31	45	M8	MU004	FL04-5Z3	0.46
25	MUFL005	69.80	74.00	95	75	8	16	10	60	24.5	22.5	32	50	M8	MU005	FL05-6Z3	0.54
30	MUFL006	83.00	89.00	112	85	9	18	13	70	27	24.5	34	58	M10	MU006	FL06-7Z3	0.79



AMI

Inserts

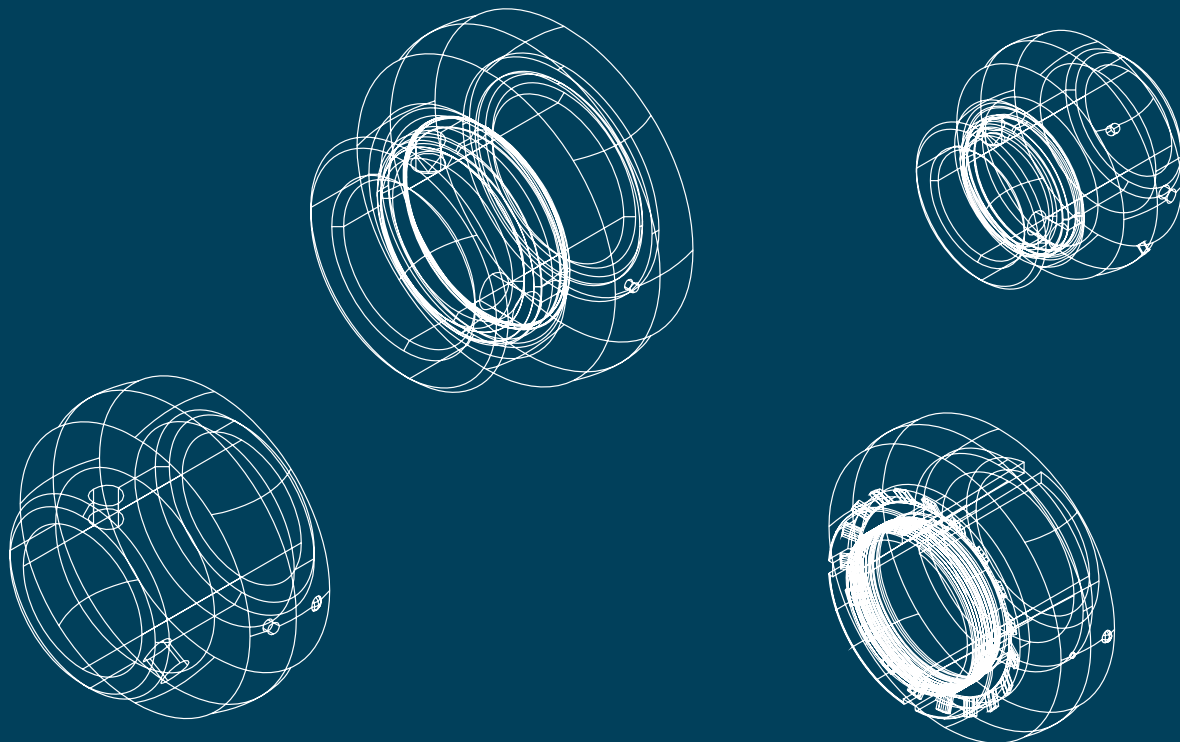




BALL BEARINGS

UC / UCW 200

NORMAL DUTY


Set-Screw (120°) Locking
Wide Inner Ring
Steel Cage
AISI 52100 Steel
0°F - 212°F
Contact Seal and Slinger
Prelubricated / Relubricatable
Inch

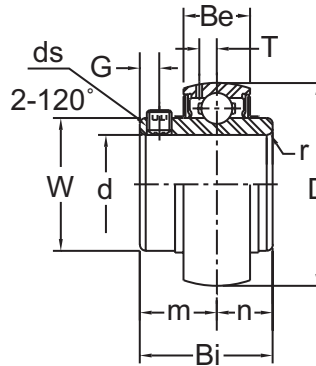

Shaft Diam. (in.) d	AMI Unit #	List Price	Dimensions (in.)										Basic Load Rating (lb.)		Weight (lb.)
			D	Bi	Be	r	n	m	G	ds(UNF)	T	W	Dynamic Cr	Static Cor	
1/2	UC201-8	27.55	1.8504	1.220	0.669	0.039	0.500	0.720	0.177	1/4-28	0.177	1.142	2890	1500	0.46
5/8	UC202-10														
11/16	UC203-11														
3/4	UC204-12	27.55	1.8504	1.220	0.669	0.059	0.500	0.720	0.177	1/4-28	0.177	1.142	2890	1500	0.35
7/8	UC205-14														
15/16	UC205-15														
1	UC205-16	30.55	2.0472	1.339	0.669	0.059	0.563	0.776	0.197	1/4-28	0.177	1.339	3150	1780	0.42
1-1/16	UC206-17														
1-1/8	UC206-18														
1-3/16	UC206-19	36.25	2.4409	1.500	0.748	0.059	0.626	0.874	0.197	1/4-28	0.201	1.594	4410	2540	0.68
1-1/4	UC206-20														
1-1/4	* UC207-20														
1-5/16	* UC207-21	46.15	2.8346	1.689	0.787	0.079	0.689	1.000	0.236	5/16-24	0.228	1.890	5820	3460	1.06
1-3/8	* UC207-22														
1-7/16	* UC207-23														
1-1/2	* UC208-24	57.55	3.1496	1.937	0.827	0.079	0.748	1.189	0.315	5/16-24	0.244	2.087	6590	4020	1.37
1-9/16	* UC208-25														
1-5/8	* UC209-26														
1-11/16	* UC209-27	62.95	3.3465	1.937	0.866	0.079	0.748	1.189	0.315	5/16-24	0.256	2.256	7420	4610	1.48
1-3/4	* UC209-28														
1-7/8	* UC210-30														
1-15/16	* UC210-31	74.40	3.5433	2.031	0.906	0.079	0.748	1.283	0.354	3/8-24	0.256	2.480	7980	5220	1.72
2	* UC210-32														
2	UC211-32														
2-1/8	UC211-34	95.25	3.9370	2.189	0.945	0.098	0.874	1.315	0.354	3/8-24	0.287	2.756	9700	6610	2.27
2-3/16	UC211-35														
2-1/4	UC212-36														
2-3/8	UC212-38	128.85	4.3307	2.563	1.024	0.098	1.000	1.563	0.394	3/8-24	0.303	3.031	11800	8120	3.20
2-7/16	UC212-39														
2-1/2	UC213-40														
2-11/16	UC214-43	157.20	4.7244	2.563	1.063	0.098	1.000	1.563	0.394	3/8-24	0.327	3.232	12900	9000	3.77
2-3/4	UC214-44														
2-15/16	UC215-47														
3	UC215-48	244.00	5.1181	3.063	1.181	0.098	1.311	1.752	0.551	7/16-20	0.362	3.602	14900	10800	4.89
3-1/4	UC217-52														
3-7/16	UC217-55														
3-1/2	UC218-56	486.00	6.2992	3.780	1.417	0.118	1.563	2.217	0.591	1/2-20	0.437	4.390	21500	16100	9.57
1/2	UCW201-8	27.55	1.5748	1.024	0.591	0.039	0.394	0.630	0.157	10-32	0.157	0.972	2150	1080	0.26
5/8	UCW202-10														0.24
11/16	UCW203-11														0.22

NOTE: *Double Lip (RD) and Triple Lip (RT) Seals are available for these sizes. Consult AMI for pricing and availability.
 Example: UC207-20RD (Double Lip) or UC207-20RT (Triple Lip)

INTERCHANGES:	VS-2	INS-SC	GY1-KRRB	YW250	UG2-NL	YAR2	2-1
---------------	------	--------	----------	-------	--------	------	-----

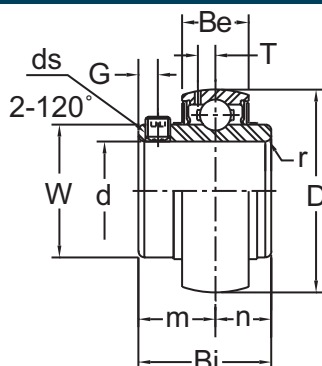

Set-Screw (120°) Locking
Wide Inner Ring
Steel Cage
AISI 52100 Steel
0°F - 212°F
Contact Seal and Slinger
Prelubricated / Relubricatable
Metric

Shaft Diam. (mm) d	AMI Unit #	List Price	Dimensions (mm)										Basic Load Rating (kgf.)		Weight (lb.)
			D	Bi	Be	r	n	m	G	ds	T	W	Dynamic Cr	Static Cor	
12	UC201	27.55	47	31	17	1	12.7	18.3	4.5	M6X0.75	4.5	29	1310	680	0.47
15	UC202														0.42
17	UC203														0.40
20	UC204	27.55	47	31	17	1.5	12.7	18.3	4.5	M6X0.75	4.5	29	1310	680	0.36
25	UC205	30.55	52	34	17	1.5	14.3	19.7	5	M6X0.75	4.5	34	1430	800	0.42
30	UC206	36.25	62	38.1	19	1.5	15.9	22.2	5	M6X0.75	5.1	40.5	2000	1150	0.69
35	* UC207	46.15	72	42.9	20	2	17.5	25.4	6	M8X1	5.8	48	2640	1570	1.07
40	* UC208	57.55	80	49.2	21	2	19	30.2	8	M8X1	6.2	53	2990	1830	1.38
45	* UC209	62.95	85	49.2	22	2	19	30.2	8	M8X1	6.5	57.3	3350	2090	1.49
50	* UC210	74.40	90	51.6	23	2	19	32.6	9	M10X1.25	6.5	63	3600	2370	1.74
55	UC211	95.25	100	55.6	24	2.5	22.2	33.4	9	M10X1.25	7.3	70	4400	3000	2.30
60	UC212	128.50	110	65.1	26	2.5	25.4	39.7	10	M10X1.25	7.7	77	5350	3700	3.23
65	UC213	157.20	120	65.1	27	2.5	25.4	39.7	10	M10X1.25	8.3	82.1	5850	4100	3.81
70	UC214	203.85	125	74.6	29	2.5	30.2	44.4	12	M12X1.5	8.7	87	6350	4500	4.59
75	UC215	244.00	130	77.8	30	2.5	33.3	44.5	14	M12X1.5	9.2	91.5	6750	4900	4.95
80	UC216	331.30	140	82.6	32	3	33.3	49.3	14	M12X1.5	9.6	98.5	7400	5400	6.29
85	UC217	392.40	150	85.7	34	3	34.1	51.6	14	M12X1.5	10.5	105	8500	6300	7.54
90	UC218	486.00	160	96	36	3	39.7	56.3	15	M12X1.5	11.1	111.5	9750	7300	9.68
Dimensions (mm)															
12	UCW201	27.55	40	26	15	1	10	16	4	M5x0.8	4	24.7	975	490	0.27
15	UCW202														0.25
17	UCW203														0.22

NOTE: *Double Lip (RD) and Triple Lip (RT) Seals are available for these sizes. Consult AMI for pricing and availability.

Example: UC207RD (Double Lip) or UC207RT (Triple Lip)

INTERCHANGES:	VS-2	INS-SC	GY1-KRRB	YW250	UG2-NL	YAR2	5205
----------------------	-------------	---------------	-----------------	--------------	---------------	-------------	-------------




BALL BEARINGS

UR 200


NORMAL DUTY

Set-Screw (120°) Locking
Wide Inner Ring
Steel Cage
AISI 52100 Steel
0°F - 212°F
Contact Seal and Slinger
Cylindrical O.D.
Prelubricated / Relubricatable
Inch and Metric

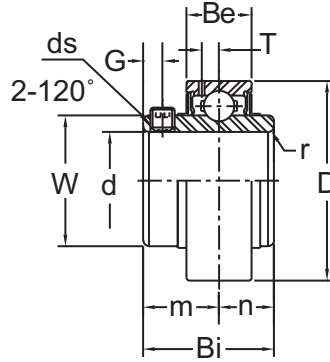

Shaft Diam. (in.) d	AMI Unit #	List Price	Dimensions (in.)										Basic Load Rating (lbf.)		Weight (lb.)		
			D	Bi	Be	r	n	m	G	ds(UNF)	T	W	Dynamic Cr	Static Cor			
3/4	UR204-12	27.55	1.8504	1.220	0.669	0.059	0.500	0.720	0.177	1/4-28	0.177	1.142	2890	1500	0.35		
1	UR205-16	30.55	2.0472	1.339	0.669	0.059	0.563	0.776	0.197	1/4-28	0.177	1.339	3150	1780	0.42		
1-1/4	UR206-20	36.25	2.4409	1.500	0.748	0.059	0.626	0.874	0.197	1/4-28	0.201	1.594	4410	2540	0.68		
1-1/4	UR207-20	46.15	2.8346	1.689	0.787	0.079	0.689	1.000	0.236	5/16-24	0.228	1.890	5820	3460	1.06		
1-7/16	UR207-23																
1-1/2	UR208-24	57.55	3.1496	1.937	0.827	0.079	0.748	1.189	0.315	5/16-24	0.244	2.087	6590	4020	1.37		
Dimensions (mm)																Basic Load Rating (kgf.)	
20	UR204	27.55	47	31	17	1.5	12.7	18.3	4.5	M6X0.75	4.5	29	1310	680	0.36		
25	UR205	30.55	52	34	17	1.5	14.3	19.7	5		4.5	34	1430	800	0.42		
30	UR206	36.25	62	38.1	19	1.5	15.9	22.2	5		5.1	40.5	2000	1150	0.69		
35	UR207	46.15	72	42.9	20	2	17.5	25.4	6	M8X1	5.8	48	2640	1570	1.07		
40	UR208	57.55	80	49.2	21	2	19	30.2	8		6.2	53	2990	1830	1.38		
45	UR209	62.95	85	49.2	22	2	19	30.2	8		6.5	57.3	3350	2090	1.49		

INTERCHANGES: UBG2-NL

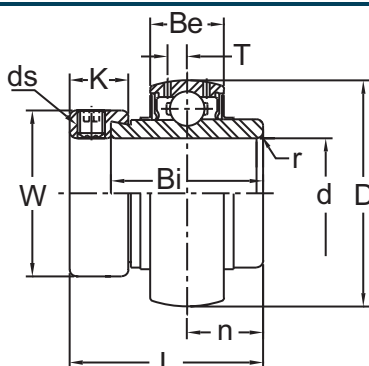

**Eccentric Locking
Wide Inner Ring
Steel Cage
AISI 52100 Steel
0°F - 212°F
Contact Seal and Slinger
Inch and Metric**

Shaft Diam. (in.) d	AMI Unit #	List Price	Dimensions (in.)										Basic Load Rating (lbf.)		Weight (lb.)
			D	L	Bi	Be	r	n	T	W	K	ds(UNF)	Dynamic Cr	Static Cor	
1/2	UGW201-8	32.80	1.5748	1-15/32	1-3/32	0.591	0.039	35/64	0.157	1-1/8	17/32	1/4-28	2150	1080	0.35
5/8	UGW202-10														
3/4	UG204-12	32.80	1.8504	1-23/32	1-11/32	0.669	0.059	43/64	0.177	1-5/16	17/32	1/4-28	2890	1500	0.46
7/8	UG205-14														
15/16	UG205-15	41.10	2.0472	1-3/4	1-3/8	0.669	0.059	11/16	0.177	1-1/2	17/32	1/4-28	3150	1780	0.51
1	UG205-16														
1-1/8	UG206-18														
1-3/16	UG206-19	48.40	2.4409	1-29/32	1-7/16	0.748	0.059	23/32	0.201	1-3/4	5/8	5/16-24	4410	2540	0.82
1-1/4	UG206-20														
1-1/4	UG207-20*														
1-5/16	UG207-21*	63.70	2.8346	2-1/64	1-31/64	0.787	0.079	0.740	0.228	2-3/16	11/16	3/8-24	5820	3460	1.32
1-3/8	UG207-22*														
1-7/16	UG207-23*														
1-1/2	UG208-24*	75.50	3.1496	2-7/32	1-11/16	0.827	0.079	27/32	0.244	2-3/8	23/32	3/8-24	6590	4020	1.68
1-9/16	UG208-25**														
1-5/8	UG209-26*														
1-11/16	UG209-27*	82.50	3.3465	2-7/32	1-11/16	0.866	0.079	27/32	0.256	2-1/2	23/32	3/8-24	7420	4610	1.74
1-3/4	UG209-28*														
1-7/8	UG210-30*														
1-15/16	UG210-31*	87.00	3.5433	2-15/32	1-15/16	0.906	0.079	31/32	0.256	2-3/4	23/32	3/8-24	7940	5220	2.01
2	UG210-32*														
2	UG211-32														
2-1/8	UG211-34	118.10	3.9370	2-13/16	2-3/16	0.945	0.098	1-3/32	0.287	3	13/16	7/16-20	9700	6610	2.78
2-3/16	UG211-35														
2-1/4	UG212-36														
2-3/8	UG212-38	147.40	4.3307	3-1/16	2-7/16	1.024	0.098	1-7/32	0.303	3-5/16	7/8	7/16-20	11800	8120	3.75
2-7/16	UG212-39														
Dimensions (mm)															
													Basic Load Rating (kgf.)		
20	UG204	32.80	47	43.7	34.2	17	1.5	17.1	4.5	33.3	13.5	M6x0.75	1310	680	0.47
25	UG205	41.10	52	44.4	34.9	17	1.5	17.5	4.5	38.1	13.5	M6x0.75	1430	800	0.51
30	UG206	48.40	62	48.4	36.5	19	1.5	18.3	5.1	44.5	15.9	M8x1	2000	1150	0.83
35	UG207*	63.70	72	51.1	37.6	20	2	18.8	5.8	55.6	17.5		2640	1570	1.34
40	UG208*	75.50	80	56.3	42.8	21	2	21.4	6.2	60.3	18.3	M10x1.25	2990	1830	1.69
45	UG209*	82.50	85	56.3	42.8	22	2	21.4	6.5	63.5	18.3		3350	2090	1.76
50	UG210*	87.00	90	62.7	49.2	23	2	24.6	6.5	69.9	18.3	M10x1.25	3600	2370	2.03
55	UG211	118.10	100	71.4	55.5	24	2.5	27.8	7.3	76.2	20.7	M12x1.5	4400	3000	2.81
60	UG212*	147.40	110	77.8	61.9	26	2.5	31	7.7	84.2	22.3	M12x1.5	5350	3700	3.79

NOTE: *Double Lip (RD) and Triple Lip (RT) Seals are available for these sizes. Consult AMI for pricing and availability.
Example: UC207-20RD (Double Lip) or UC207-20RT (Triple Lip), **Consult factory for availability.



INTERCHANGES: VE-2 INS-SXR G1-KRRB YG2-NL YEL2 UEL2 R-E



BALL BEARINGS

B / BR

**Set-Screw (120°) Locking
Narrow Inner Ring
Steel Cage
AISI 52100 Steel
0°F - 212°F
Contact Seal
Inch and Metric**





NORMAL DUTY

Shaft Diam. (in.) d	AMI Unit #		List Price	Dimensions (in.)								Basic Load Rating (lbf.)		Weight (lb.)	
				D	Bi	Be	r	n	m	G	ds(UNF)	W	Dynamic Cr		Static Cor
1/2	B1-8	BR1-8	24.85	1.5748	0.866	0.472	0.039	0.236	0.630	0.157	10-32	0.972	2150	1080	0.22
5/8	B2-10	BR2-10		1.8504	0.972	0.551	0.059	0.276	0.697	0.177	10-32	1.142	2890	1500	0.26
3/4	B4-12	BR4-12	26.75	2.0472	1.063	0.591	0.059	0.295	0.767	0.197	1/4-28	1.339	3150	1780	0.35
7/8	B5-14	BR5-14													
1	B5-16	BR5-16													
1-1/16	B6-17	—	34.50	2.4409	1.193	0.630	0.059	0.315	0.878	0.197	1/4-28	1.594	4410	2540	0.55
1-1/8	B6-18	BR6-18													
1-3/16	B6-19	BR6-19													
1-1/4	B6-20	BR6-20													
1-1/4	B7-20	BR7-20	43.30	2.8346	1.295	0.669	0.079	0.335	0.961	0.236	5/16-24	1.890	5820	3460	0.84
1-5/16	B7-21	BR7-21													
1-3/8	B7-22	BR7-22													
1-7/16	B7-23	BR7-23													
1-1/2	B8-24	—	69.50	3.1496	1.398	0.709	0.079	0.354	1.043	0.315	5/16-24	2.087	6590	4020	1.08
Dimensions (mm)															
12	B1	BR1	24.85	40	22	12	1	6	16	4	M5X0.8	24.7	975	490	0.20
15	B2	BR2													
17	B3	BR3													
20	B4	BR4	25.65	47	24.7	14	1.5	7	17.7	4.5	M5X0.8	29	1310	680	0.27
25	B5	BR5	26.75	52	27	15	1.5	7.5	19.5	5	M6X0.75	34	1430	800	0.36
30	B6	BR6	34.50	62	30.3	16	1.5	8	22.3	5	M6X0.75	40.5	2000	1150	0.56
35	B7	BR7	43.30	72	32.9	17	2	8.5	24.4	6	M8X1	48	2640	1570	0.85
40	B8	—	69.50	80	35.5	18	2	9	26.5	8		53	2990	1830	1.09

INTERCHANGES:	VS-1	INS-VSC	YA-RRB	SB2	B250	GAY-NPP	SG2-NL	AS2	L-	SLS-1	SBG2-EL	MSLN	SL-
---------------	------	---------	--------	-----	------	---------	--------	-----	----	-------	---------	------	-----

INTERCHANGES:	MB-25-PA
---------------	----------

KH 200 Type
(Relube)KHR 200 Type
(Non-Relube)

Eccentric Locking
Narrow Inner Ring
Steel Cage
AISI 52100 Steel
0°F - 212°F
Contact Seal
Prelubricated / Relubricatable
Inch and Metric

Shaft Diam. (in.) d	AMI Unit #		List Price	Dimensions (in.)									Basic Load Rating (lb.)		Weight (lb.)
				D	L	Bi	Be	r	n	W	K	ds(UNF)	Dynamic Cr	Static Cor	
1/2	KH201-8	KHR201-8	27.30	1.5748	1-1/8	0.752	0.472	0.039	0.256	1-1/8	17/32	1/4-28	2150	1080	0.26
5/8	KH202-10	KHR202-10		1.8504	1-7/32	0.846	0.551	0.059	0.295	1-5/16	17/32	1/4-28	2890	1500	0.35
3/4	KH204-12	KHR204-12	29.80	2.0472	1-7/32	0.846	0.591	0.059	0.295	1-1/2	17/32	1/4-28	3150	1780	0.44
7/8	KH205-14	KHR205-14		—	—	—	—	—	—	—	—	—	—	—	—
15/16	KH205-15	KHR205-15	39.30	2.4409	1-13/32	0.938	0.630	0.059	0.354	1-3/4	5/8	5/16-24	4410	2540	0.68
1	KH205-16	KHR205-16		—	—	—	—	—	—	—	—	—	—	—	—
1-1/8	KH206-18	KHR206-18	52.80	2.8346	1-17/32	1.000	0.669	0.079	0.374	2-3/16	11/16	3/8-24	5820	3460	1.08
1-3/16	KH206-19	KHR206-19		—	—	—	—	—	—	—	—	—	—	—	—
1-1/4	KH206-20	KHR206-20	61.80	3.1496	1-23/32	1.188	0.709	0.079	0.433	2-3/8	23/32	3/8-24	6590	4020	1.37
1-1/4	KH207-20	KHR207-20		—	—	—	—	—	—	—	—	—	—	—	—
1-5/16	KH207-21	KHR207-21	69.80	3.3465	1-23/32	1.188	0.748	0.079	0.433	2-1/2	23/32	3/8-24	7420	4610	1.43
1-3/8	KH207-22	KHR207-22		—	—	—	—	—	—	—	—	—	—	—	—
1-7/16	KH207-23	KHR207-23	78.60	3.5433	1-23/32	1.188	0.787	0.079	0.433	2-3/4	23/32	3/8-24	7980	5220	1.65
1-1/2	KH208-24	KHR208-24		—	—	—	—	—	—	—	—	—	—	—	—
1-5/8	KH209-26	KHR209-26	103.10	3.9370	1-29/32	1.281	0.827	0.098	0.472	3	13/16	7/16-20	9700	6610	2.07
1-11/16	KH209-27	KHR209-27		—	—	—	—	—	—	—	—	—	—	—	—
1-3/4	KH209-28	KHR209-28	27.30	40	28.6	19.1	12	1	6.5	28.6	13.5	M6X0.75	975	490	0.27
1-7/8	KH210-30	KHR210-30		47	31	21.5	14	1.5	7.5	33.3	13.5	M6X0.75	1310	680	0.36
1-15/16	KH210-31	KHR210-31	29.80	52	31	21.5	15	1.5	7.5	38.1	13.5	M6X0.75	1430	800	0.45
2	KH211-32	KHR211-32	39.30	62	35.7	23.8	16	1.5	9	44.5	15.9	M8X1	2000	1150	0.69
2-3/16	KH211-35	KHR211-35	52.80	72	38.9	25.4	17	2	9.5	55.6	17.5	M10X1.25	2640	1570	1.09
	KH201	KHR201	61.80	80	43.7	30.2	18	2	11	60.3	18.3		2990	1830	1.38
	KH209	KHR209	69.80	85	43.7	30.2	19	2	11	63.5	18.3		3350	2090	1.45
	KH210	KHR210	78.60	90	43.7	30.2	20	2	11	69.9	18.3	M10X1.25	3600	2370	1.67
	KH211	—	103.10	100	48.7	32.5	21	2.5	12	75.8	20.7	M12x1.5	4400	3000	2.07

INTERCHANGES: VE-1 INS-SXV RA-RRB SA2 B220 GRA-NPP W2-UL YET2 AEL2 SLE-1 WB2-UL AELS




CYLINDRICAL O.D. BALL BEARINGS W/SNAP RING

SER 200


NORMAL DUTY

Set-Screw (120°) Locking
Wide Inner Ring
Steel Cage
AISI 52100 Steel
0°F - 212°F
Contact Seal and Slinger
Cylindrical O.D.
Prelubricated / Relubricatable
Inch and Metric

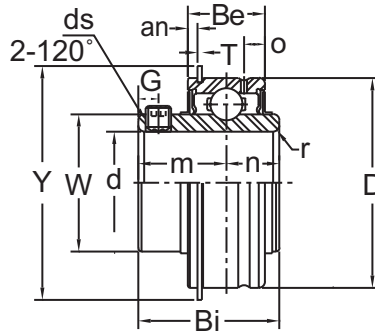

Shaft Diam. (in.) d	AMI Unit #	List Price	Dimensions (in.)													Basic Load Rating (lb.)		Weight (lb.)		
			D	Bi	Be	r	n	m	G	ds(UNF)	o	W	an	T	Y(max)	Dynamic Cr	Static Cor			
1/2	SER201-8	37.40	1.8504	1-7/32	5/8	0.039	13/32	13/16	0.177	1/4-28	0.150	1.142	3/32	0.042	2.075	2890	1500	0.60		
5/8	SER202-10																	0.55		
3/4	SER204-12	37.40	1.8504	1-7/32	5/8	0.059	13/32	13/16	0.177	1/4-28	0.150	1.142	3/32	0.042	2.075	2890	1500	0.48		
7/8	SER205-14																			
15/16	SER205-15	41.80	2.0472	1-3/8	3/4	0.059	33/64	55/64	0.197	1/4-28	13/64	1.339	3/32	0.042	2.280	3150	1780	0.62		
1	SER205-16																			
1-1/16	SER206-17																			
1-1/8	SER206-18	47.80	2.4409	1-1/2	7/8	0.059	5/8	7/8	0.197	1/4-28	7/32	1.594	1/8	0.065	2.665	4410	2540	0.84		
1-3/16	SER206-19																			
1-1/4	SER206-20																			
1-1/4	SER207-20																			
1-5/16	SER207-21	57.50	2.8346	1-11/16	15/16	0.079	11/16	1	0.236	5/16-24	7/32	1.890	1/8	0.065	3.095	5820	3460	1.23		
1-3/8	SER207-22																			
1-7/16	SER207-23																			
1-1/2	SER208-24	72.00	3.1496	1-15/16	1-3/32	0.079	3/4	1-3/16	0.315	5/16-24	1/4	2.087	1/8	0.065	3.410	6590	4020	1.92		
1-9/16	SER208-25																			
1-5/8	SER209-26																			
1-11/16	SER209-27	82.00	3.3465	1-15/16	1-3/32	0.079	3/4	1-3/16	0.315	5/16-24	1/4	2.256	1/8	0.065	3.606	7420	4610	2.09		
1-3/4	SER209-28																			
1-7/8	SER210-30	91.90	3.5433	2-1/32	1-1/8	0.079	3/4	1-9/32	0.354	3/8-24	19/64	2.480	1/8	0.095	3.799	7980	5220	2.27		
1-15/16	SER210-31																			
2	SER211-32	120.50	3.9370	2-3/16	1-3/16	0.098	7/8	1-5/16	0.354	3/8-24	19/64	2.756	1/8	0.095	4.193	9700	6610	2.67		
2-3/16	SER211-35																			
2-1/4	SER212-36																			
2-3/8	SER212-38	142.70	4.3307	2-9/16	1-1/4	0.098	1	1-9/16	0.394	3/8-24	19/64	3.031	1/8	0.095	4.591	11800	8160	3.70		
2-7/16	SER212-39																			
Dimensions (mm)																			Basic Load Rating (kgf.)	
12	SER201																	0.60		
15	SER202	40.60	47	31	15.9	1	10.3	20.7	4.5	M6X0.75	3.8	29	2.38	1.07	52.7	1310	680	0.56		
17	SER203																	0.51		
20	SER204	40.60	47	31	15.9	1.5	10.3	20.7	4.5	M6X0.75	3.8	29	2.38	1.07	52.7	1310	680	0.48		
25	SER205	45.45	52	34.9	19	1.5	13.1	21.8	5	M6X0.75	5.2	34	2.38	1.07	57.9	1430	800	0.62		
30	SER206	52.00	62	38.1	22.2	1.5	15.9	22.2	5	M6X0.75	5.6	40.5	3.18	1.65	67.7	2000	1150	0.84		
35	SER207	62.55	72	42.9	23.8	2	17.5	25.4	6	M8X1.0	5.6	48	3.18	1.65	78.6	2640	1570	1.23		
40	SER208	78.25	80	49.2	27.8	2	19	30.2	8	M8X1.0	6.4	53	3.18	1.65	86.6	2990	1830	1.92		
45	SER209	89.10	85	49.2	27.8	2	19	30.2	8	M8X1.0	6.4	57.3	3.18	1.65	91.6	3350	2090	2.09		
50	SER210	99.85	90	51.6	28.6	2	19	32.6	9	M10X1.25	7.5	63	3.18	2.41	96.5	3600	2370	2.27		
55	SER211	130.95	100	55.6	30.2	2.5	22.2	33.4	9	M10X1.25	7.5	70	3.18	2.41	106.5	4400	3000	2.67		
60	SER212	155.10	110	65.1	31.8	2.5	25.4	39.7	10	M10X1.25	7.5	77	3.18	2.41	116.6	5350	3700	3.70		

INTERCHANGES: VER-2 ER UBGL2-NL

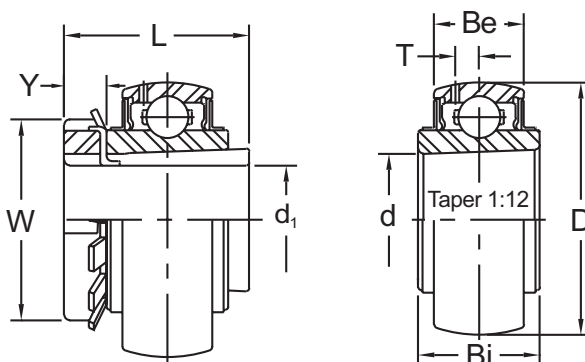

**Tapered Adapter Sleeve Locking
Wide Inner Ring
Steel Cage
AISI 51200 Steel
0°F - 212°F
Contact Seal and Slinger
Prelubricated / Relubricatable
Inch and Metric**

Shaft Diam. (in.) d ₁	AMI Unit #	List Price	Dimensions (in.)								Basic Load Rating (lbf.)		Weight (lb.)
			D	L	d	Bi	Be	T	Y	W	Dynamic Cr	Static Cor	
3/4 13/16	UK205+HE2305 UK205+HA2305	59.50	2.0472	1.378	0.9843	0.906	0.669	0.177	0.315	1.496	3150	1780	0.53
7/8 15/16	UK206+HS2306 UK206+HA2306 UK206+HE2306	70.10	2.4409	1.496	1.1811	1.024	0.748	0.201	0.315	1.772	4410	2540	0.88
1-1/8 1-3/16	*UK207+HS2307 *UK207+HA2307	82.95	2.8346	1.693	1.3780	1.063	0.787	0.228	0.354	2.047	5820	3460	1.17
1-1/4 1-5/16	*UK208+HE2308 *UK208+HA2308 *UK208+HS2308	99.80	3.1496	1.811	1.5748	1.142	0.827	0.244	0.394	2.283	6590	4020	1.52
1-7/16 1-1/2	*UK209+HA2309 *UK209+HE2309 *UK209+HS2309	113.40	3.3465	1.969	1.7717	1.181	0.866	0.256	0.433	2.559	7420	4610	1.70
1-11/16 1-3/4	*UK210+HA2310 *UK210+HE2310	130.05	3.5433	2.165	1.9685	1.220	0.906	0.256	0.472	2.756	7980	5220	2.05
1-7/8 1-15/16	UK211+HS2311 UK211+HA2311 UK211+HE2311	158.50	3.9370	2.323	2.1654	1.299	0.945	0.287	0.472	2.953	9700	6610	2.56
2-1/16 2-1/8	UK212+HA2312 UK212+HS2312	189.75	4.3307	2.441	2.3622	1.417	1.024	0.303	0.512	3.150	11800	8120	3.24
2-3/16 2-1/4	UK213+HA2313 UK213+HE2313 UK213+HS2313	231.95	4.7244	2.559	2.5591	1.496	1.063	0.327	0.551	3.346	12900	9000	4.01
2-7/16 2-1/2	UK215+HA2315 UK215+HE2315	340.60	5.1181	2.874	2.9528	1.614	1.181	0.362	0.591	3.858	14900	10800	5.71
2-11/16 2-3/4	UK216+HA2316 UK216+HE2316	403.80	5.5118	3.071	3.1496	1.732	1.260	0.378	0.669	4.134	16300	11900	7.21
2-15/16 3	UK217+HA2317 UK217+HE2317	495.40	5.9055	3.228	3.3465	1.811	1.339	0.413	0.709	4.331	18700	13900	8.64
3-1/8	UK218+HS2318	590.75	6.2992	3.386	3.5433	1.929	1.417	0.437	0.709	4.724	21500	16100	10.31
Dimensions (mm)													
											Basic Load Rating (kgf.)		
20	UK205+H2305	59.50	52	35	25	23	17	4.5	8	38	1430	800	0.54
25	UK206+H2306	70.10	62	38	30	26	19	5.1	8	45	2000	1150	0.89
30	*UK207+H2307	82.95	72	43	35	27	20	5.8	9	52	2640	1570	1.18
35	*UK208+H2308	99.80	80	46	40	29	21	6.2	10	58	2990	1830	1.54
40	*UK209+H2309	113.40	85	50	45	30	22	6.5	11	65	3350	2090	1.72
45	*UK210+H2310	130.05	90	55	50	31	23	6.5	12	70	3600	2370	2.07
50	UK211+H2311	158.50	100	59	55	33	24	7.3	12	75	4400	3000	2.59
55	UK212+H2312	189.75	110	62	60	36	26	7.7	13	80	5350	3700	3.28
60	UK213+H2313	231.95	120	65	65	38	27	8.3	14	85	5850	4100	4.06
65	UK215+H2315	340.60	130	73	75	41	30	9.2	15	98	6750	4900	5.78
70	UK216+H2316	403.80	140	78	80	44	32	9.6	17	105	7400	5400	7.29
75	UK217+H2317	495.40	150	82	85	46	34	10.5	18	110	8500	6300	8.74
80	UK218+H2318	590.75	160	86	90	49	36	11.1	18	120	9750	7300	10.5

NOTE: *Double Lip (RD) and Triple Lip (RT) Seals are available for these sizes. Consult AMI for pricing and availability.
Example: UC207-20RD (Double Lip) or UC207-20RT (Triple Lip)

INTERCHANGES: UK2




ACCU-LOC® BALL BEARINGS

UE 200


NORMAL DUTY

Accu-Loc Concentric Locking Collar
Wide Inner Ring
Steel Cage
AISI 52100 Steel
w/Black Oxide Finish
0°F - 212°F
Contact Seal and Slinger
Prelubricated / Relubricatable
Inch and Metric

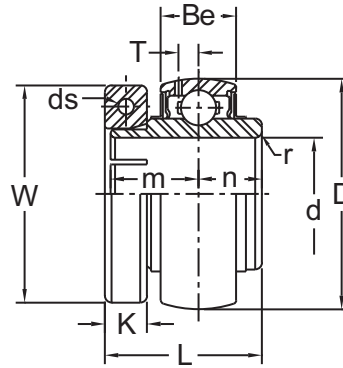

Shaft Diam. (in.) d1	AMI Unit #	List Price	Dimensions (in.)										Basic Load Rating (lbf.)		Weight (lb.)	
			D	L	Be	r	n	m	T	W	K	ds(UNC)	Dynamic Cr	Static Cor		
3/4	UE204-12	62.40	1.8504	1.299	0.669	0.059	0.500	0.720	0.177	1.724	0.374	8-32	2890	1500	0.51	
7/8	UE205-14	64.50	2.0472	1.394	0.669	0.059	0.563	0.780	0.177	1.929	0.374	8-32	3150	1780	0.62	
15/16	UE205-15															
1	UE205-16	85.30	2.4409	1.567	0.748	0.059	0.626	0.874	0.201	2.185	0.374	8-32	4410	2540	0.90	
1-1/8	UE206-18															
1-3/16	UE206-19															
1-1/4	UE206-20															
1-1/4	UE207-20	113.80	2.8346	1.728	0.787	0.079	0.689	1.000	0.228	2.421	0.433	10-24	5820	3460	1.39	
1-3/8	UE207-22									2.520						
1-7/16	UE207-23															
1-1/2	UE208-24	116.00	3.1496	1.976	0.827	0.079	0.748	1.189	0.244	2.677	0.433	10-24	6590	4020	1.70	
1-11/16	UE209-27	131.50	3.3465	1.976	0.866	0.079	0.748	1.189	0.256	2.913	0.433	10-24	7420	4610	1.87	
1-3/4	UE209-28															
1-15/16	UE210-31	143.10	3.5433	2.071	0.906	0.079	0.748	1.283	0.256	3.189	0.571	1/4-20	7980	5220	2.34	
2	UE210-32															
2	UE211-32	167.20	3.9370	2.228	0.945	0.098	0.874	1.315	0.287	3.189	0.571	1/4-20	9700	6610	3.13	
2-3/16	UE211-35									3.622						
2-7/16	UE212-39	196.30	4.3307	2.622	1.024	0.098	1.000	1.563	0.303	4.055	0.687	5/16-18	11800	8120	4.54	
Dimensions (mm)													Basic Load Rating (kgf.)			
20	UE204	61.30	47	33.0	17	1.5	12.7	18.3	4.5	43.8	9.5	M4x0.7x16	1310	680	0.51	
25	UE205	63.50	52	35.4	17	1.5	14.3	19.8	4.5	49.0	9.5		1430	800	0.62	
30	UE206	84.50	62	39.8	19	1.5	15.9	22.2	5.1	55.5	9.5		2000	1150	0.90	
35	UE207	111.20	72	43.9	20	2	17.5	25.4	5.8	64.0	11.0	M5x0.8x20	2640	1570	1.39	
40	UE208	115.30	80	50.2	21	2	19	30.2	6.2	68.0	11.0		2990	1830	1.70	
45	UE209	133.20	85	50.2	22	2	19	30.2	6.5	74.0	11.0		3350	2090	1.87	
50	UE210	143.80	90	52.6	23	2	19	32.6	6.5	81.0	14.5	M6x1x25	3600	2370	2.34	
55	UE211	184.70	100	56.6	24	2.5	22.2	33.4	7.3	92.0	14.5	M6x1x25	4400	3000	3.13	
60	UE212	199.90	110	66.6	26	2.5	25.4	39.7	7.7	103.0	17.4	M8x1.25x25	5350	3700	4.54	

INTERCHANGES: VB-2 INS-DL KMB-45 2-1T

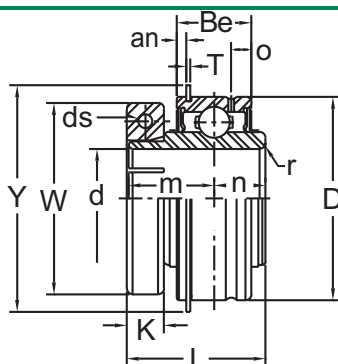

Accu-Loc Concentric Locking Collar
Wide Inner Ring
Steel Cage
AISI 52100 Steel
w/Black Oxide Finish
0°F - 212°F
Contact Seal and Slinger
Cylindrical O.D.
Prelubricated / Relubricatable
Inch and Metric

Shaft Diam. (in.)	AMI Unit #	List Price	Dimensions (in.)													Basic Load Rating (lb.)			Weight (lb.)		
			D	L	Be	r	O	n	m	W	K	an	T	Y(max)	ds(UNC)	Dynamic Cr	Static Cor				
3/4	SUE204-12	62.40	1.8504	1.299	5/8	0.059	0.150	13/32	13/16	1.724	0.374	3/32	0.042	2.075	8-32	2890	1500	0.64			
1	SUE205-16	64.50	2.0472	1.394	3/4	0.059	13/64	33/64	55/64	1.929	0.374	3/32	0.042	2.280	8-32	3150	1780	0.82			
1-1/8	SUE206-18	85.30	2.4409	1.567	7/8	0.059	7/32	5/8	7/8	2.185	0.374	1/8	0.065	2.665	8-32	4410	2540	1.04			
1-3/16	SUE206-19																				
1-1/4	SUE206-20	113.80	2.8346	1.728	15/16	0.079	7/32	11/16	1	2.421	0.433	1/8	0.065	3.095	10-24	5820	3460	1.54			
1-1/4	SUE207-20																				
1-3/8	SUE207-22	116.00	3.1496	1.976	1-3/32	0.079	1/4	3/4	1-3/16	2.677	0.433	1/8	0.065	3.410	10-24	6590	4020	2.23			
1-7/16	SUE207-23																				
1-1/2	SUE208-24	131.50	3.3465	1.976	1-3/32	0.079	1/4	3/4	1-3/16	2.913	0.433	1/8	0.065	3.606	10-24	7420	4610	2.45			
1-11/16	SUE209-27																				
1-3/4	SUE209-28	143.10	3.5433	2.071	1-1/8	0.079	19/64	3/4	1-9/32	3.189	0.571	1/8	0.095	3.799	1/4-20	7980	5220	2.87			
1-15/16	SUE210-31																				
2	SUE211-32	167.20	3.9370	2.228	1-3/16	0.098	19/64	7/8	1-5/16	3.189	0.571	1/8	0.095	4.193	1/4-20	9700	6610	3.46			
2-3/16	SUE211-35									3.622											
2-7/16	SUE212-39	196.30	4.3307	2.622	1-1/4	0.098	19/64	1	1-9/16	4.055	0.687	1/8	0.095	4.591	5/16-18	11800	8120	5.03			
Dimensions (mm)																			Basic Load Rating (kgf.)		
20	SUE204	61.30	47	33.0	15.9	1.5	3.8	10.3	20.6	43.8	9.5	2.38	1.07	52.7	M4x0.7	1310	680	0.64			
25	SUE205	63.50	52	35.4	19.0	1.5	5.2	13.1	21.8	49.0	9.5	2.38	1.07	57.9		1430	800	0.82			
30	SUE206	84.50	62	39.8	22.2	1.5	5.6	15.9	22.2	55.5	9.5	3.18	1.65	67.7		2000	1150	1.04			
35	SUE207	111.20	72	43.9	23.8	2.0	5.6	17.5	25.4	64.0	11.0	3.18	1.65	78.6	M5x0.8	2640	1570	1.54			
40	SUE208	115.30	80	50.2	27.8	2.0	6.4	19.0	30.2	68.0	11.0	3.18	1.65	86.6		2990	1830	2.23			
45	SUE209	133.20	85	50.2	27.8	2.0	6.4	19.0	30.2	74.0	11.0	3.18	1.65	91.6		3350	2090	2.45			
50	SUE210	143.80	90	52.6	28.6	2.0	7.5	19.0	32.5	81.0	14.5	3.18	2.41	96.5	M6x1	3600	2370	2.87			
55	SUE211	184.70	100	56.6	30.2	2.5	7.5	22.2	33.3	92.0	14.5	3.18	2.41	106.5	M6x1	4400	3000	3.46			
60	SUE212	199.90	110	66.6	31.8	2.5	7.5	25.4	39.7	103.0	17.4	3.18	2.41	116.6	M8x1.25	5350	3700	5.03			


INTERCHANGES: ER-K ER-T



BALL BEARINGS

UCX 00



Set-Screw (120°) Locking
Wide Inner Ring
Steel Cage
AISI 52100 Steel
0°F - 212°F
Contact Seal and Slinger
Prelubricated / Relubricatable
Inch and Metric

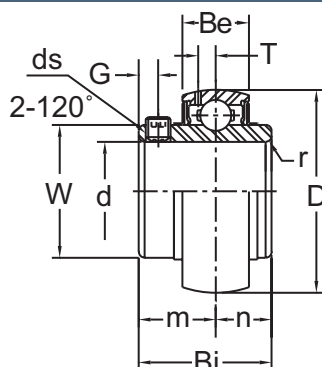

MEDIUM DUTY

Shaft Diam. (in.) d	AMI Unit #	List Price	Dimensions (in.)										Basic Load Rating (lbf.)		Weight (lb.)
			D	Bi	Be	r	n	m	G	ds(UNF)	T	W	Dynamic Cr	Static Cor	
1	UCX05-16	53.70	2.4409	1.500	0.748	0.059	0.626	0.874	0.197	1/4-28	0.201	1.594	4410	2540	0.82
1-1/8	UCX06-18	61.50	2.8346	1.689	0.787	0.059	0.689	1.000	0.236	5/16-24	0.228	1.890	5820	3460	1.01
1-3/16	UCX06-19														
1-1/4	UCX06-20	76.50	3.1496	1.937	0.827	0.079	0.748	1.189	0.315	5/16-24	0.244	2.087	6590	4020	1.63
1-1/4	UCX07-20														
1-3/8	UCX07-22	85.20	3.3465	1.937	0.866	0.079	0.748	1.189	0.315	5/16-24	0.256	2.256	7420	4610	1.76
1-7/16	UCX07-23														
1-1/2	UCX08-24	96.90	3.5433	2.031	0.906	0.079	0.748	1.283	0.354	3/8-24	0.256	2.480	7980	5220	2.03
1-5/8	UCX09-26														
1-11/16	UCX09-27	116.20	3.9370	2.189	0.945	0.079	0.874	1.315	0.354	3/8-24	0.287	2.756	9700	6610	2.67
1-3/4	UCX09-28														
1-7/8	UCX10-30	157.80	4.3307	2.563	1.024	0.098	1.000	1.563	0.394	3/8-24	0.303	3.031	11800	8120	3.79
1-15/16	UCX10-31														
2	UCX10-32	186.00	4.7244	2.563	1.063	0.098	1.000	1.563	0.394	3/8-24	0.327	3.232	12900	9000	4.34
2	UCX11-32														
2-3/16	UCX11-35	223.50	4.9213	2.937	1.142	0.098	1.189	1.748	0.472	7/16-20	0.343	3.425	14000	9900	5.14
2-1/4	UCX11-36														
2-3/8	UCX12-38	244.00	5.1181	3.063	1.181	0.098	1.311	1.752	0.472	7/16-20	0.362	3.602	14900	10800	5.66
2-7/16	UCX12-39														
2-1/2	UCX13-40	299.00	5.5118	3.252	1.260	0.098	1.311	1.941	0.472	7/16-20	0.378	3.878	16300	11900	7.10
2-11/16	UCX14-43														
2-3/4	UCX14-44	363.00	5.9055	3.374	1.339	0.118	1.343	2.031	0.472	7/16-20	0.413	4.134	18700	13900	8.40
2-15/16	UCX15-47														
3	UCX15-48	429.00	6.2992	3.780	1.417	0.118	1.563	2.217	0.472	1/2-20	0.437	4.390	21500	16100	10.65
3-3/16	UCX16-51														
3-1/4	UCX17-52	571.00	6.6929	4.094	1.496	0.118	1.689	2.406	0.551	9/16-18	0.469	4.646	24500	18400	12.10
3-7/16	UCX17-55														
3-1/2	UCX18-56	745.00	7.4803	4.626	1.654	0.138	1.937	2.689	0.630	5/8-18	0.512	5.217	30200	23600	19.92
3-15/16	UCX20-63														
4	UCX20-64														
			Dimensions (mm)										Basic Load Rating (kgf.)		
25	UCX05	53.70	62	38.1	19	1.5	15.9	22.2	5	M6x0.75	5.1	40.5	2000	1150	0.83
30	UCX06	61.50	72	42.9	20	1.5	17.5	25.4	6	M8x1	5.8	48	2640	1570	1.03
35	UCX07	76.50	80	49.2	21	2	19	30.2	8	M8x1	6.2	53	2990	1830	1.65
40	UCX08	85.20	85	49.2	22	2	19	30.2	8	M8x1	6.5	57.3	3350	2090	1.78
45	UCX09	96.90	90	51.6	23	2	19	32.6	9	M10x1.25	6.5	63	3600	2370	2.05
50	UCX10	116.20	100	55.6	24	2	22.2	33.4	9	M10x1.25	7.3	70	4400	3000	2.70
55	UCX11	157.80	110	65.1	26	2.5	25.4	39.7	10	M10x1.25	7.7	77	5350	3700	3.84
60	UCX12	186.00	120	65.1	27	2.5	25.4	39.7	10	M10x1.25	8.3	82.1	5850	4100	4.39
65	UCX13	223.50	125	74.6	29	2.5	30.2	44.4	12	M12x1.5	8.7	87	6350	4500	5.20
70	UCX14	244.00	130	77.8	30	2.5	33.3	44.5	12		9.2	91.5	6750	4900	5.73
75	UCX15	299.00	140	82.6	32	2.5	33.3	49.3	12	M12x1.5	9.6	98.5	7400	5400	7.18
80	UCX16	363.00	150	85.7	34	3	34.1	51.6	12		10.5	105	8500	6300	8.50
85	UCX17	429.00	160	96	36	3	39.7	56.3	12	M12x1.5	11.1	111.5	9750	7300	10.8
90	UCX18	571.00	170	104	38	3	42.9	61.1	14	M14x1.5	11.9	118	11100	8350	12.3
100	UCX20	745.00	190	117.5	42	3.5	49.2	68.3	16	M16x1.5	13	132.5	13700	10700	20.2

INTERCHANGES: VS-3 INS-SCM GYM1-KRRB B350 MB-35 YAR2 UCX 3-1

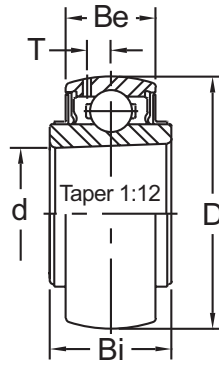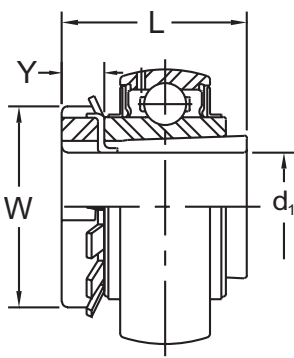

**Tapered Adapter Sleeve Locking
Wide Inner Ring
Steel Cage
AISI 52100 Steel
0°F - 212°F
Contact Seal and Slinger
Prelubricated / Relubricatable Inch
and Metric**

Shaft Diam. (in.) d ₁	AMI Unit #	List Price	Dimensions (in.)								Basic Load Rating (lb _f)		Weight (lb.)
			D	L	d	Bi	Be	T	Y	W	Dynamic Cr	Static Cor	
3/4	UKX05+HE2305	62.90	2.4409	1.378	0.9843	1.024	0.748	0.201	0.315	1.496	4410	2540	0.83
13/16	UKX05+HA2305												
7/8	UKX06+HS2306	71.00	2.8346	1.496	1.1811	1.063	0.787	0.228	0.315	1.772	5820	3460	1.20
15/16	UKX06+HA2306												
1	UKX06+HE2306												
1-1/8	UKX07+HS2307	86.15	3.1496	1.693	1.3780	1.142	0.827	0.244	0.354	2.047	6590	4020	1.56
1-3/16	UKX07+HA2307												
1-1/4	UKX08+HE2308	94.60	3.3465	1.811	1.5748	1.181	0.866	0.256	0.394	2.283	7420	4610	1.81
1-5/16	UKX08+HA2308												
1-3/8	UKX08+HS2308												
1-7/16	UKX09+HA2309	106.20	3.5433	1.969	1.7717	1.220	0.906	0.256	0.433	2.559	7980	5220	2.10
1-1/2	UKX09+HE2309												
1-5/8	UKX09+HS2309												
1-11/16	UKX10+HA2310	127.70	3.9370	2.165	1.9685	1.299	0.945	0.287	0.472	2.756	9700	6610	2.72
1-3/4	UKX10+HE2310												
1-7/8	UKX11+HS2311	160.20	4.3307	2.323	2.1654	1.417	1.024	0.303	0.472	2.953	11800	8120	3.43
1-15/16	UKX11+HA2311												
2	UKX11+HE2311												
2-1/16	UKX12+HA2312	193.10	4.7244	2.441	2.3622	1.496	1.063	0.327	0.512	3.150	12900	9000	4.21
2-1/8	UKX12+HS2312												
2-3/16	UKX13+HA2313	247.00	4.9213	2.559	2.5591	1.575	1.142	0.343	0.551	3.346	14000	9900	4.66
2-1/4	UKX13+HE2313												
2-3/8	UKX13+HS2313												
2-7/16	UKX15+HA2315	326.60	5.5118	2.874	2.9528	1.732	1.260	0.378	0.591	3.858	16300	11900	7.25
2-1/2	UKX15+HE2315												
2-3/4	UKX16+HE2316	400.20	5.9055	3.071	3.1496	1.811	1.339	0.413	0.669	4.134	18700	13900	8.61
2-15/16	UKX17+HA2317	471.40	6.2992	3.228	3.3465	1.929	1.417	0.437	0.709	4.331	21500	16100	10.6
3	UKX17+HE2317												
3-1/8	UKX18+HS2318	632.90	6.6929	3.386	3.5433	2.047	1.496	0.469	0.709	4.724	24500	18400	11.4
3-7/16	UKX20+HA2320	825.80	7.4803	3.819	3.9370	2.283	1.654	0.512	0.787	5.118	30200	23600	18.1
3-1/2	UKX20+HE2320												
			Dimensions (mm)								Basic Load Rating (kg _f)		
			D	L	d	Bi	Be	T	Y	W	Dynamic Cr	Static Cor	
20	UKX05+H2305	62.90	62	35	25	26	19	5.1	8	38	2000	1150	0.83
25	UKX06+H2306	71.00	72	38	30	27	20	5.8	8	45	2640	1570	1.20
30	UKX07+H2307	86.15	80	43	35	29	21	6.2	9	52	2990	1830	1.56
35	UKX08+H2308	94.60	85	46	40	30	22	6.5	10	58	3350	2090	1.81
40	UKX09+H2309	106.20	90	50	45	31	23	6.5	11	65	3600	2370	2.10
45	UKX10+H2310	127.70	100	55	50	33	24	7.3	12	70	4400	3000	2.72
50	UKX11+H2311	160.20	110	59	55	36	26	7.7	12	75	5350	3700	3.43
55	UKX12+H2312	193.10	120	62	60	38	27	8.3	13	80	5850	4100	4.21
60	UKX13+H2313	247.00	125	65	65	40	29	8.7	14	85	6350	4500	4.66
65	UKX15+H2315	326.60	140	73	75	44	32	9.6	15	98	7400	5400	7.25
70	UKX16+H2316	400.20	150	78	80	46	34	10.5	17	105	8500	6300	8.61
75	UKX17+H2317	471.40	160	82	85	49	36	11.1	18	110	9750	7300	10.6
80	UKX18+H2318	632.90	170	86	90	52	38	11.9	18	120	11100	8350	11.4
90	UKX20+H2320	825.80	190	97	100	58	42	13	20	130	13700	10700	18.1

INTERCHANGES: UKX




ACCU-LOC® BALL BEARINGS

UEx 00


MEDIUM DUTY

Concentric Locking
52100 Bearing Steel
w/Black Oxide Finish
Wide Inner Ring
Steel Cage,
AISI 52100 Steel w/ Black Oxide Finish,
0 ° F ~ 212° F
Contact Seal and Slinger
Pre-lubricated / Re-lubricatable
Inch Sizes Only

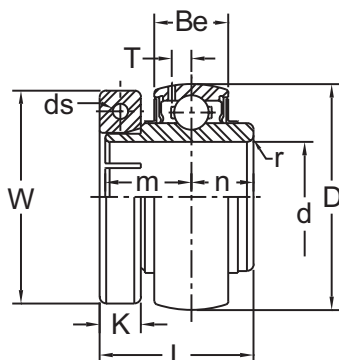

Shaft Diam. (in.)	AMI Unit #	List Price	Dimensions (in.)										Basic Load Rating (lbf.)		Weight (lb.)
			D	L	Be	r	n	m	T	W	K	ds(UNC)	Dynamic Cr	Static Cor	
1	UEx05-16	132.80	2.4409	1-35/64	3/4	0.059	5/8	7/8	0.201	1-59/64	3/8	8-32	4410	2540	0.90
1-3/16	UEx06-19	169.05	2.8346	1-3/4	25/32	0.059	11/16	1	0.228	2-3/16	3/8	8-32	5820	3460	1.36
1-7/16	UEx07-23	180.45	3.1496	1-31/32	53/64	0.079	3/4	1-3/16	0.244	2-33/64	7/16	10-24	6590	4020	1.72
1-1/2	UEx08-24	201.00	3.3465	1-31/32	55/64	0.079	3/4	1-3/16	0.256	2-43/64	7/16	10-24	7420	4610	2.02
1-11/16	UEx09-27	209.30	3.5433	2-5/64	29/32	0.079	3/4	1-9/32	0.256	2-29/32	7/16	10-24	7980	5220	2.39
1-3/4	UEx09-28	209.30	3.5433	2-5/64	29/32	0.079	3/4	1-9/32	0.256	2-29/32	7/16	10-24	7980	5220	2.29
1-15/16	UEx10-31	269.60	3.9370	2-15/64	15/16	0.079	7/8	1-5/16	0.287	3-3/16	37/64	1/4-20	9700	6610	3.03
2-3/16	UEx11-35	302.50	4.3307	2-39/64	1-1/32	0.098	1	1-9/16	0.303	3-5/8	37/64	1/4-20	11800	8120	4.09

INTERCHANGES: 3-1T / VB-3 / INS-DLM / KMB55

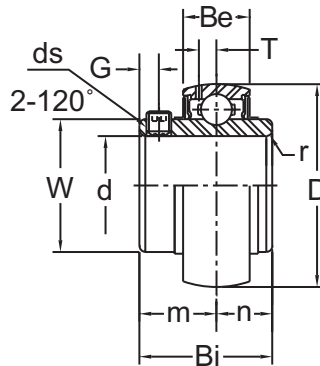

Set-Screw (120°) Locking
Wide Inner Ring
Steel Cage
AISI 52100 Steel
0°F - 212°F
Contact Seal and Slinger
Prelubricated / Relubricatable
Inch and Metric


HEAVY DUTY

Shaft Diam. (in.) d	AMI Unit #	List Price	Dimensions (in.)										Basic Load Rating (lb.)		Weight (lb.)
			D	Bi	Be	r	n	m	G	ds(UNF)	T	W	Dynamic Cr	Static Cor	
1	UC305-16	69.40	2.4409	1.496	0.827	0.079	0.591	0.906	0.236	1/4-28	0.240	1.453	4780	2450	0.97
1-3/16	UC306-19	78.70	2.8346	1.693	0.906	0.079	0.669	1.024	0.236	1/4-28	0.264	1.772	6020	3370	1.23
1-1/4	UC307-20	92.90	3.1496	1.890	0.984	0.098	0.748	1.142	0.315	5/16-24	0.291	1.988	7530	4320	1.56
1-7/16	UC307-23														
1-1/2	UC308-24	114.70	3.5433	2.047	1.063	0.098	0.748	1.299	0.394	3/8-24	0.323	2.205	9150	5380	2.20
1-11/16	UC309-27	146.90	3.9370	2.244	1.181	0.098	0.866	1.378	0.394	3/8-24	0.354	2.480	11570	6630	2.82
1-3/4	UC309-28														
1-7/8	UC310-30	181.50	4.3307	2.402	1.260	0.118	0.866	1.535	0.472	7/16-20	0.394	2.776	13900	8600	3.64
1-15/16	UC310-31														
2	UC311-32	227.20	4.7244	2.598	1.339	0.118	0.984	1.614	0.472	7/16-20	0.421	3.012	16100	10100	4.56
2-3/16	UC311-35														
2-7/16	UC312-39	276.20	5.1181	2.795	1.417	0.138	1.024	1.772	0.472	1/2-20	0.453	3.248	18300	11700	5.71
2-1/2	UC313-40	328.80	5.5118	2.953	1.496	0.138	1.181	1.772	0.472	1/2-20	0.480	3.484	20800	13500	6.94
2-11/16	UC314-43	466.20	5.9055	3.071	1.575	0.138	1.299	1.772	0.472	1/2-20	0.512	3.748	23400	15200	8.44
2-3/4	UC314-44														
2-15/16	UC315-47	515.80	6.2992	3.228	1.654	0.138	1.260	1.969	0.551	9/16-18	0.543	3.996	25600	17300	10.12
3	UC315-48	554.50													
3-3/16	UC316-51	706.50	6.6929	3.386	1.732	0.138	1.339	2.047	0.551	9/16-18	0.571	4.252	27650	19400	11.90
3-1/4	UC317-52	860.20	7.0866	3.780	1.811	0.157	1.575	2.205	0.630	5/8-18	0.591	4.508	29700	21700	14.50
3-7/16	UC318-55	1459.10	7.4803	3.780	1.890	0.157	1.575	2.205	0.630	5/8-18	0.626	4.764	32200	24000	16.18
3-1/2	UC318-56	950.40													
3-3/4	UC319-60	1066.60	7.8740	4.055	1.969	0.157	1.614	2.441	0.630	5/8-18	0.657	5.020	34400	26600	19.17
3-15/16	UC320-63	1299.10	8.4646	4.252	2.126	0.157	1.654	2.598	0.709	3/4-16	0.709	5.335	39000	31500	23.80
4	UC320-64														
4-7/16	UC322-71	1744.40	9.4488	4.606	2.362	0.157	1.811	2.795	0.709	3/4-16	0.827	5.984	46100	40200	31.90
Dimensions (mm)															
													Basic Load Rating (kgf.)		
25	UC305	69.40	62	38	21	2	15	23	6	M6x0.75	6.1	36.9	2170	1120	0.98
30	UC306	78.70	72	43	23	2	17	26	6	M6x0.75	6.7	45	2730	1530	1.25
35	UC307	92.90	80	48	25	2.5	19	29	8	M8x1	7.4	50.5	3400	1960	1.58
40	UC308	114.70	90	52	27	2.5	19	33	10	M10x1.25	8.2	56	4150	2440	2.23
45	UC309	146.90	100	57	30	2.5	22	35	10	M10x1.25	9	63	5250	3000	2.85
50	UC310	181.50	110	61	32	3	22	39	12	M12x1.5	10	70.5	6300	3900	3.68
55	UC311	227.20	120	66	34	3	25	41	12	M12x1.5	10.7	76.5	7300	4600	4.62
60	UC312	276.20	130	71	36	3.5	26	45	12		11.5	82.5	8300	5300	5.78
65	UC313	328.80	140	75	38	3.5	30	45	12		12.2	88.5	9450	6100	7.02
70	UC314	466.20	150	78	40	3.5	33	45	12	M12x1.5	13	95.2	10600	6930	8.54
75	UC315	554.50	160	82	42	3.5	32	50	14	M14x1.5	13.8	101.5	11600	7840	10.3
80	UC316	706.50	170	86	44	3.5	34	52	14	M14x1.5	14.5	108	12540	8800	12.1
85	UC317	860.20	180	96	46	4	40	56	16	M16x1.5	15	114.5	13500	9800	14.7
90	UC318	950.40	190	96	48	4	40	56	16		15.9	121	14600	10900	16.4
95	UC319	1066.60	200	103	50	4	41	62	16		16.7	127.5	15600	12100	19.4
100	UC320	1299.10	215	108	54	4	42	66	18	M18x1.5	18	135.5	17700	14300	24.1
105	UC321	1601.80	225	112	56	4	44	68	18		19	142	18700	15600	27.2
110	UC322	1744.40	240	117	60	4	46	71	18		21	152	20900	18230	31.9
120	UC324	2343.50	260	126	64	4	51	75	18	M18x1.5	22	165	21100	18900	41.3
130	UC326	2939.90	280	135	68	5	54	81	20	M20x1.5	23	178	23400	21900	51.3
140	UC328	3821.30	300	145	73	5	59	86	20	M20x1.5	25	191.5	26000	25100	63.6

INTERCHANGES: UG3-L UC3





Eccentric Locking
Wide Inner Ring
Steel Cage
AISI 52100 Steel
0°F - 212°F
Contact Seal and Slinger
Prelubricated / Relubricatable
Inch and Metric

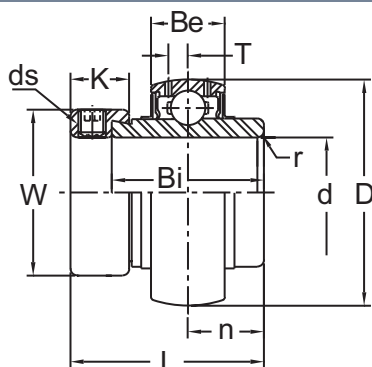

HEAVY DUTY

Shaft Diam. (in.) d	AMI Unit #	List Price	Dimensions (in.)										Basic Load Rating (lb.f.)		Weight (lb.)
			D	L	Bi	Be	r	n	T	W	K	ds(UNF)	Dynamic Cr	Static Cor	
1-7/16	UG307-23	142.00	3.1496	2.031	1.500	0.984	0.098	0.720	0.291	2.150	0.689	3/8-24	7530	4320	1.60
1-1/2	UG308-24	176.50	3.5433	2.248	1.626	1.063	0.098	0.780	0.323	2.484	0.783	3/8-24	9150	5380	2.60
1-11/16	UG309-27	210.30	3.9370	2.311	1.689	1.181	0.098	0.780	0.354	2.740	0.783	3/8-24	11570	6630	3.20
1-15/16	UG310-31	260.20	4.3307	2.622	1.937	1.260	0.118	0.969	0.394	2.976	0.846	3/8-24	13900	8600	4.20
2-3/16	UG311-35	338.80	4.7244	2.874	2.189	1.339	0.118	1.094	0.421	3.252	0.874	7/16-20	16100	10100	5.20
2-7/16	UG312-39	446.80	5.1181	3.126	2.437	1.417	0.138	1.220	0.453	3.469	0.941	7/16-20	18300	11700	6.20
2-11/16	UG314-43	597.75	5.9055	3.626	2.689	1.575	0.138	1.342	0.512	3.984	1.189	9/16-18	23400	15300	10.0
2-15/16 3	UG315-47 UG315-48	677.00	6.2992	3.937	2.937	1.654	0.138	1.469	0.543	4.409	1.252	5/8-18	25600	17300	12.4 12.0
Dimensions (mm)													Basic Load Rating (kgf.)		
45	UG309	210.30	100	58.7	42.9	30.0	2.5	19.8	9.0	69.6	19.9	M10x1.25	5250	3000	3.2
50	UG310	260.20	110	66.6	49.2	32.0	3.0	24.6	10.0	75.6	21.5	M10x1.25	6300	3900	4.0
55	UG311	338.80	120	73.0	55.6	34.0	3.0	27.8	10.7	82.6	22.2	M12x1.5	7300	4600	5.2
60	UG312	446.80	130	79.4	61.9	36.0	3.5	31.0	11.5	88.1	23.9	M12x1.5	8300	5300	6.4
70	UG314	597.75	150	92.1	68.3	40.0	3.5	34.1	13.0	101.2	30.2	M14x1.5	10600	6930	9.8
75	UG315	677.00	160	100.0	74.6	42.0	3.5	37.3	13.8	112.0	31.8	M16x1.5	11600	7840	12.2
90	UG318	847.70	190	115.9	87.3	48.0	4.0	43.6	15.9	132.7	35.0	M18x1.5	14600	10900	19.8

INTERCHANGES: GN-KRRB UEL3

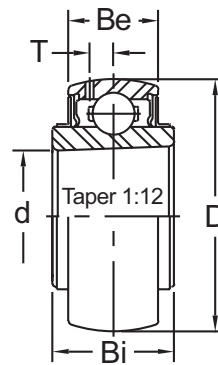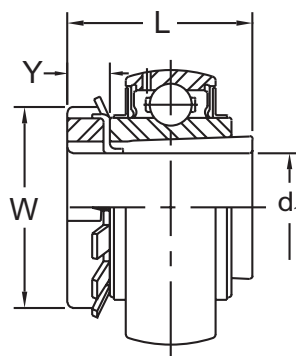

**Tapered Adapter Sleeve Locking
Wide Inner Ring
Steel Cage
AISI 52100 Steel
0°F - 212°F
Contact Seal and Slinger
Prelubricated / Relubricatable
Inch and Metric**

HEAVY DUTY


Shaft Diam. (in.) d1	AMI Unit #	List Price	Dimensions (in.)								Basic Load Rating (lb.)		Weight (lb.)		
			D	L	d	Bi	Be	T	Y	W	Dynamic Cr	Static Cor			
3/4	UK305+HE2305	67.10	2.4409	1.378	0.9843	1.024	0.827	0.240	0.315	1.496	4780	2450	1.06		
15/16 1	UK306+HA2306	81.20	2.8346	1.496	1.1811	1.142	0.906	0.264	0.315	1.772	6020	3370	1.30		
	UK306+HE2306														
1-1/8 1-3/16	UK307+HS2307 UK307+HA2307	96.05	3.1496	1.693	1.3780	1.220	0.984	0.291	0.354	2.047	7530	4320	1.63		
1-1/4	UK308+HE2308	115.80	3.5433	1.811	1.5748	1.339	1.063	0.323	0.394	2.283	9150	5380	2.23		
1-5/16 1-3/8	UK308+HA2308 UK308+HS2308														
1-7/16 1-1/2 1-5/8	UK309+HA2309 UK309+HE2309 UK309+HS2309														
1-11/16 1-3/4	UK310+HA2310 UK310+HE2310	176.95	4.3307	2.165	1.9685	1.575	1.260	0.394	0.472	2.756	13900	8600	3.70		
1-7/8 1-15/16 2	UK311+HS2311 UK311+HA2311 UK311+HE2311	224.00	4.7244	2.323	2.1654	1.693	1.339	0.421	0.472	2.953	16100	10100	4.54		
2-1/8	UK312+HS2312	269.75	5.1181	2.441	2.3622	1.811	1.417	0.453	0.512	3.150	18300	11700	5.58		
2-3/16	UK313+HA2313	328.25	5.5118	2.559	2.5591	1.890	1.496	0.480	0.551	3.346	20800	13500	6.77		
2-1/4 2-3/8	UK313+HE2313 UK313+HS2313														
2-7/16 2-1/2	UK315+HA2315 UK315+HE2315														
2-11/16 2-3/4	UK316+HA2316 UK316+HE2316	544.55	6.6929	3.071	3.1496	2.244	1.732	0.571	0.669	4.134	27650	19400	12.39		
2-15/16 3	UK317+HA2317 UK317+HE2317	658.25	7.0866	3.228	3.3465	2.362	1.811	0.591	0.709	4.331	29700	21700	14.46		
3-1/8 3-3/16	UK318+HS2318 UK318+HA2318	748.40	7.4803	3.386	3.5433	2.480	1.890	0.626	0.709	4.724	32200	24000	16.57		
3-1/4	UK319+HE2319	999.90	7.8740	3.543	3.7402	2.598	1.969	0.657	0.748	4.921	34400	26600	19.22		
3-7/16 3-1/2	UK320+HA2320 UK320+HE2320	1142.35	8.4646	3.819	3.9370	2.835	2.126	0.709	0.787	5.118	39000	31500	23.80		
3-15/16 4	UK322+HA2322 UK322+HE2322	1606.45	9.4488	4.134	4.3307	3.150	2.362	0.827	0.827	5.709	46100	40200	31.74		
Dimensions (mm)														Basic Load Rating (kgf.)	
20	UK305+H2305	67.10	62	35	25	26	21	6.1	8	38	2170	1120	1.07		
25	UK306+H2306	81.20	72	38	30	29	23	6.7	8	45	2730	1530	1.32		
30	UK307+H2307	96.05	80	43	35	31	25	7.4	9	52	3400	1960	1.65		
35	UK308+H2308	115.80	90	46	40	34	27	8.2	10	58	4150	2440	2.25		
40	UK309+H2309	144.55	100	50	45	37	30	9.0	11	65	5250	3000	2.92		
45	UK310+H2310	176.95	110	55	50	40	32	10.0	12	70	6300	3900	3.75		
50	UK311+H2311	224.00	120	59	55	43	34	10.7	12	75	7300	4600	4.59		
55	UK312+H2312	269.75	130	62	60	46	36	11.5	13	80	8300	5300	5.64		
60	UK313+H2313	328.25	140	65	65	48	38	12.2	14	85	9450	6100	6.85		
65	UK315+H2315	464.65	160	73	75	54	42	13.8	15	98	11600	7840	10.60		
70	UK316+H2316	544.55	170	78	80	57	44	14.5	17	105	12540	8800	12.6		
75	UK317+H2317	658.25	180	82	85	60	46	15.0	18	110	13500	9800	14.7		
80	UK318+H2318	748.40	190	86	90	63	48	15.9	18	120	14600	10900	16.8		
85	UK319+H2319	999.90	200	90	95	66	50	16.7	19	125	15600	12100	19.5		
90	UK320+H2320	1142.35	215	97	100	72	54	18.0	20	130	17700	14300	24.1		
100	UK322+H2322	1606.45	240	105	110	80	60	21.0	21	145	20900	18230	32.1		
110	UK324+H2324	2022.95	260	112	120	86	64	22.0	22	155	21100	18900	40.2		
115	UK326+H2326	2722.75	280	121	130	92	68	23.0	23	165	23400	21900	52.0		
125	UK328+H2328	3487.00	300	131	140	98	73	25.0	24	180	26000	25100	64.2		

INTERCHANGES: UK3




SILVER SERIES BALL BEARINGS U / URE / K / MU 000

Eccentric Locking
Extra Narrow Inner Ring
AISI 52100 Steel
0°F - 212°F
Contact Seal
Metric
URE Designates Cylindrical O.D.




Shaft Diam. (mm)	AMI Unit #	List Price	Dimensions (mm)										Basic Load Rating (kgf.)		Weight (lb.)
			D	L	Bi	Be	r	n	K	W	A	ds	Dynamic Cr	Static Cor	
10	U000	27.10	26	17.5	11	8	0.5	4	8.5	17	3.5	M4x0.7	470	200	0.07
12	U001	28.50	28	17.5	11	8	0.5	4	8.5	19	3.5		520	245	0.08
15	U002	29.60	32	18.5	12	9	0.5	4.5	8.5	22	3.5		570	290	0.11
17	U003	34.40	35	20.5	13.5	10	0.5	5	9.5	25	3.5	M4x0.7	610	335	0.14
20	U004	37.90	42	24.5	16.5	12	1	6	11	30	5	M5x0.8	955	515	0.23
25	U005	44.40	47	25.5	17.5	12	1	6	12	36	5	M5x0.8	1030	595	0.30
30	U006	52.70	55	26.5	18.5	13	1.5	6.5	12	42	5	M5x0.8	1350	845	0.42
35	U007	56.20	62	29.5	20	14	1.5	7	13.5	48	5	M6x0.75	1625	1050	0.56
20 3/4	URE004 URE004-12	37.90	42	24.5	16.5	12	1	6	11	30	5	M5x0.8	955	515	0.23

Set-Screw Locking
Extra Narrow Inner Ring
AISI 52100 Steel
0°F - 212°F
Contact Seal
Metric



Shaft Diam. (mm)	AMI Unit #	List Price	Dimensions (mm)								Basic Load Rating (kgf.)		Weight (lb.)
			D	Bi	Be	r	n	G	W	ds	Dynamic Cr	Static Cor	
10	K000	31.50	26	14	8	0.5	4	3	14.75	M3x0.35	470	200	0.05
12	K001	34.40	28	14.5	8	0.5	4	3	17.35	M3x0.35	520	245	0.06
15	K002	35.60	32	16.5	9	0.5	4.5	3.5	20.02	M4x0.50	570	290	0.10
17	K003	37.85	35	17.5	10	0.5	5	3.5	23.10	M4x0.50	610	335	0.11
20	K004	44.20	42	21	12	1	6	4	27.00	M5x0.50	955	515	0.19
25	K005	46.10	47	22.5	12	1	6	4.5	31.70	M5x0.50	1030	595	0.22
30	K006	56.80	55	24.5	13	1.5	6.5	5	38.00	M5x0.50	1350	845	0.32



Eccentric Locking
Extra Narrow Inner Ring
440C Stainless Steel Bearing
0°F - 212°F
Contact Seal
Metric




Shaft Diam. (mm)	AMI Unit #	List Price	Dimensions (mm)										Basic Load Rating (kgf.)		Weight (lb.)
			D	L	Bi	Be	r	n	k	W	A	ds	Dynamic Cr	Static Cor	
10	MU000	82.00	26	17.5	11	8	0.5	4	8.5	17	3.5	M4x0.7	400	160	0.07
12	MU001		28	17.5	11	8	0.5	4	8.5	19	3.5		440	195	0.08
15	MU002		32	18.5	12	9	0.5	4.5	8.5	22	3.5		485	230	0.11
17	MU003	86.60	35	20.5	13.5	10	0.5	5	9.5	25	3.5	M4x0.7	520	270	0.14
20	MU004	96.60	42	24.5	16.5	12	1	6	11	30	5	M5x0.8	810	410	0.23
25	MU005	116.30	47	25.5	17.5	12	1	6	12	36	5	M5x0.8	875	475	0.30
30	MU006	149.50	55	26.5	18.5	13	1.5	6.5	12	42	5	M5x0.8	1150	675	0.42

“FS” Standard Features

Set Screw (SER) or Accu-Loc (SUE)
 Bore Sizes: 1/2" to 2-7/16" (20 to 40mm)
 Low Drag/Non Contact Seal
 Oil Lubrication
 Stamped Steel Riveted Retainer
 52100 Chrome Steel or 440C Stainless
 Zone Hardened Wide Inner Race

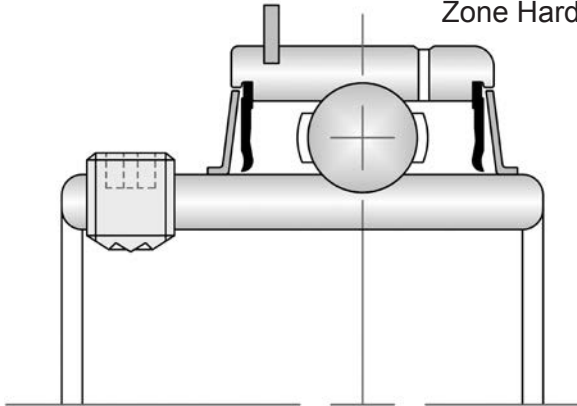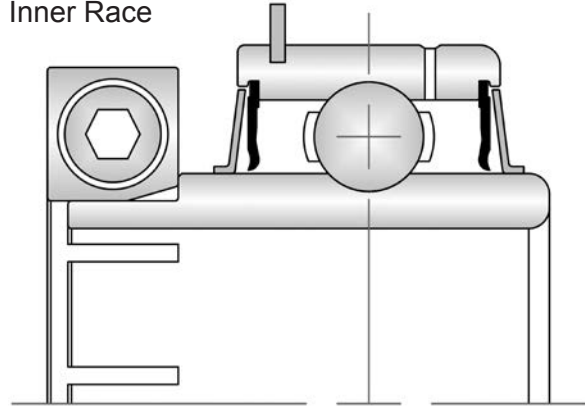**SER205-16FS****SUE205-16FS****“FSX” Standard Features**

Set Screw (SER)
 Bore Sizes: 1/2" to 2-7/16" (20 to 40mm)
 Low Drag/Non Contact Seal
 Oil Lubrication
 Reinforced, Stabilized Nylon Retainer
 52100 Chrome Steel
 Zone Hardened Wide Inner Race

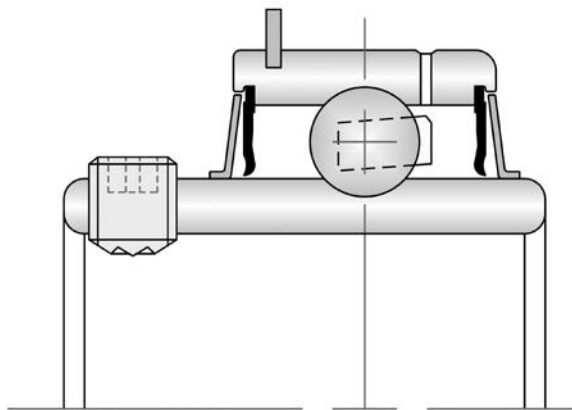**SER205-16FSX****Application Examples**

Packaging
 Printing Machinery
 In Line Systems
 Conveyor Equipment

Options

Low-Torque Grease instead of Oil
 We can make most bearing units Free Spinning
 Contact Us for Price and Availability

For critical applications like pulp and paper converting, printing, and packaging, expensive downtime results from materials tearing due to excessive torque and vibration.

The path of the materials through these machines is very complex, composed of hundreds of rolls where many different processes are applied, such as printing, dyeing, curing, drying, folding, cutting, perforating, or finishing of some type.

These materials can be very sensitive and typically have low strength. If rotational torque and vibration are excessive, materials can tear, mis-feed, or jam, creating costly down-time.

AMI's free spinning bearings are engineered and designed to excel in these applications. Precise raceway curvatures combined with superb surface finishes, help to provide a low coefficient of friction. To further reduce rotational torque or drag, these bearings are lubricated with a low viscosity oil, or light consistency grease.

Finally, because the bearing seal is a key factor to the success of a bearing, AMI remains a market leader when it comes to the sealing arrangements.

Our free spinning bearings utilize a formed metal slinger in conjunction with a modified Buna-Nitrile seal forming an effective labyrinth design. Although there are two seals involved, there is actually no contact of the sealing elements with the rotating bearing components. Yet the unique design does an excellent job of keeping out contamination, while yielding the lowest possible rotational torque.

STARTING TORQUE CHART (gf•cm)			
SER/SUE "FS"	Avg	Max	Min
201-204	30	45	25
205	40	60	30
206	60	90	45
207	80	120	60
208	100	150	75
209	120	180	90
210	140	200	105
211	160	210	120
212	180	230	135

INTERCHANGE BY MANUFACTURER			
BORE	AMI Part #	MB	SealMaster
1 (in.)	SUE205-16FS	ER16K-SFF	ER-16T XLO
25 (mm)	SUE205FS	—	ER-205T XLO

High-Temperature Grease Alone-Does Not Make a High-Temperature Bearing!

HIGH TEMPERATURE GREASES

The Lubrication! This is what some bearing manufacturers consider to be the only difference between a standard and High-Temp insert. The use of High-Temperature grease alone does not create a High-Temperature bearing insert. For AMI it is one of the many important elements that make up a true High-Temp bearing. Listed below are the greases used in AMI's C4HR5 and C4HR23 bearing units:

C4HR5 = Max bearing operating temp (392°F) Yuken Super-Lube No.3/Oil Research Industrial, LTD. *soap based (compound) *max. operating temperature of the grease (+392°F)

C4HR23 = Max bearing operating temp (+450°F) Noxlub BF4026/Nok Klubber Co., LTD. *fluorinated base (proprietary mixture) *max. operating temperature of the grease (+500°F)

INTERNAL CLEARANCE

In the manufacturing of ball bearings, it is a standard practice for AMI to assemble its rings and balls with a specified internal clearance. In the case of High-Temp inserts, internal clearance is even more important in compensating for thermal expansion of bearings, shafts and housings. AMI uses internal clearance standard of (C4) on all of its High-Temp inserts.

SILICONE RUBBER SEALS

Most standard units are supplied with a nitrile rubber seal. Nitrile rubber is an excellent seal at temperatures ranging from 0 to 212 degrees F. Soon after that temperature, nitrile rubber starts to breakdown... Leaving no sealing element to retain the High-Temp lubrication. **SILICONE** seals have excellent temperature stability, exceptional release from sticking, resistance to aging, ozone, sunlight and outstanding water repellence. The use of **SILICONE** seals insures that the High-Temp lube stays where it belongs... in the bearing!

ZINC ANODIZED SLINGER

In order to allow the silicone to properly do its job as a seal, AMI uses a special **ZINC** anodized slinger to protect it. The purpose of a slinger is not only to protect the seal, but also to provide the first line of defense for the balls and retainer against contaminants. Using a standard cold rolled steel slinger in a High-Temp application may initially provide protection, but quite possibly corrode and lead to premature bearing failure. AMI's process of **ZINC** anodization produces a slinger with two key attributes... Heat and Abrasion Resistance. A resistance that will maintain its properties well past the operating temperature of the bearings.

High-Temperature Units (up to 400°F)		Pillow Block	4 Bolt, 2 Bolt Flange	Take-Up	Tapped Base, 3 Bolt Flange Bracket	Piloted Flange
		UCP200C4HR5	UCF200C4HR5 UCFL200C4HR5	UCST200C4HR5	UCTB200C4HR5 UCFB200C4HR5	UCFCS200C4HR5 UCFCF200C4HR5
AMI Part #	AVAILABLE SIZES	PRICE	PRICE	PRICE	PRICE	PRICE
201 - 204	12mm, 15mm, 17mm, 20mm, 1/2" - 3/4"	82.30	83.10	89.90	99.00	-
205	25mm, 7/8" - 1"	94.70	95.90	107.60	111.70	-
206	30mm, 1-1/8" - 1-1/4"	113.60	114.60	133.00	153.90	123.60
207	35mm, 1-1/4" - 1-7/16"	135.40	138.10	164.30	176.90	148.00
208	40mm, 1-1/2"	159.30	162.50	195.10	198.20	175.00
209	45mm, 1-5/8" - 1-3/4"	179.20	182.50	220.70	217.00	200.40
210	50mm, 1-7/8" - 2"	205.30	204.30	273.80	250.40	218.50
211	55mm, 2" - 2-3/16"	262.80	265.30	356.60	-	299.90
212	60mm, 2-1/4" - 2-7/16"	331.40	329.30	450.60	-	358.00
213	65mm, 2-1/2"	397.80	397.80	560.80	-	414.10
214	70mm, 2-11/16" - 2-3/4"	465.60	465.60	-	-	539.80
215	75mm, 2-15/16" - 3"	534.20	534.20	-	-	656.50
216	80mm	633.90	633.90	-	-	731.40
217	85mm	769.40	769.40	-	-	963.90

High-Temperature Units (up to 450°F)		Pillow Block	4 Bolt, 2 Bolt Flange	Take-Up	Tapped Base, 3 Bolt Flange Bracket	Piloted Flange
		UCP200C4HR23	UCF200C4HR23 UCFL200C4HR23	UCST200C4HR23	UCTB200C4HR23 UCFB200C4HR23	UCFCS200C4HR23 UCFCF200C4HR23
AMI Part #	AVAILABLE SIZES	PRICE	PRICE	PRICE	PRICE	PRICE
201 - 204	12mm, 15mm, 17mm, 20mm, 1/2" - 3/4"	149.10	149.90	156.70	165.90	-
205	25mm, 7/8" - 1"	173.20	174.40	186.20	190.20	-
206	30mm, 1-1/8" - 1-1/4"	206.20	207.20	225.50	246.40	216.10
207	35mm, 1-1/4" - 1-7/16"	248.10	250.90	277.10	289.40	260.80
208	40mm, 1-1/2"	291.60	294.90	327.40	330.50	307.30
209	45mm, 1-5/8" - 1-3/4"	328.30	331.20	369.70	366.10	349.40
210	50mm, 1-7/8" - 2"	370.20	369.20	438.70	415.30	383.40
211	55mm, 2" - 2-3/16"	478.80	480.30	572.60	-	515.90
212	60mm, 2-1/4" - 2-7/16"	603.90	601.80	745.10	-	630.50
213	65mm, 2-1/2"	721.80	721.80	884.90	-	738.20
214	70mm, 2-11/16" - 2-3/4"	916.90	973.40	-	-	991.10
215	75mm, 2-15/16" - 3"	1059.30	1135.10	-	-	1181.60

High-Temperature Bearing Inserts		UC200C4HR5 (up to 400°F)	UC200C4HR23 (up to 450°F)
AMI Part #	AVAILABLE SIZES	PRICE	PRICE
201 - 204	12mm, 15mm, 17mm, 20mm, 1/2" - 3/4"	66.90	133.70
205	25mm, 7/8" - 1"	78.60	157.10
206	30mm, 1-1/8" - 1-1/4"	92.60	185.10
207	35mm, 1-1/4" - 1-7/16"	112.80	225.50
208	40mm, 1-1/2"	132.30	264.70
209	45mm, 1-5/8" - 1-3/4"	149.00	298.10
210	50mm, 1-7/8" - 2"	164.90	329.80
211	55mm, 2" - 2-3/16"	216.00	432.00
212	60mm, 2-1/4" - 2-7/16"	272.50	545.00
213	65mm, 2-1/2"	324.00	648.10
214	70mm, 2-11/16" - 2-3/4"	376.10	827.40
215	75mm, 2-15/16" - 3"	437.60	962.70
216	80mm	509.80	1121.50
217	85mm, 3-1/4"	614.90	1352.70

NOTE: Medium Duty and Heavy Duty are also available - Call for more information.

MATERIALS

Bearing Materials:

Because of repetitive stresses to the rolling contact areas within a bearing, surface fatigue will occur after some duration of operation depending upon the operating conditions. To maximize to the useful life of a bearing by delaying the onset of material fatigue, the highest possible quality materials are used in bearing production with the following properties:

- High Levels of Hardness
- High Rolling Contact Fatigue Resistance
- Good Wear Resistance
- Good Mechanical Strength

The standard material for AMI bearing rings and rolling elements is vacuum-degassed, high-carbon, chrome bearing steel. For applications that operate in wash down or corrosive environments, stainless steel is used.

Table 1

Bearing Rings and Balls:	<u>C</u>	<u>Si</u>	<u>Mn</u>	<u>P</u>	<u>S</u>	<u>Cr</u>	<u>Mo</u>
SUJ2 (US Equivalent AISI 52100)	0.95 - 1.10	0.15 - 0.35	≤ 0.50	≤ 0.025	≤ 0.025	1.30 - 1.60	≤ 0.08
SUS440C Stainless Steel	0.95 - 1.20	≤ 1.0	≤ 1.0	≤ 0.040	≤ 0.030	16.0 - 18.0	≤ 0.75

Additionally we offer our bearings made with SUJ2 steel that are coated with black oxide, zinc, or Kanigen to impart additional corrosion resistance. Contact AMI for additional information on these coatings and their proper application.

Housing Materials:

Gray Iron

Our bearing housings are one-piece solid cast iron with a minimum tensile strength of 25,000 psi. They are designed to be able to accommodate the full dynamic and static loading of the bearing inserts they are designed to incorporate. Most cast housings are available with Nickel Plating to impart some corrosion resistance.

Ductile Iron

For applications requiring additional strength, Ductile Iron is available with a minimum strength of 40,000 psi. These should be requested for any application involving shock or impact loading.

Stamped Steel

We offer a wide variety of stamped steel housings for light duty applications, with the advantage of ball bearing construction in an economical low cost unit.

Thermoplastic and Stainless Steel

We also offer our housings made with Polybutylene Terephthalate Thermoplastic (PBT) and Stainless Steel. These products are featured in our "Corrosion Protection Bearing Units" catalog.

TOLERANCES**Inner Bearing Ring Bore Tolerances:****Table 2**

Nominal Bore Diameter				Tolerance		
Over		Including		Minimum	Maximum	
in.	mm	in.	mm		in.	mm
0.3937	10	0.7087	18	0	+0.0006	+0.015
0.7087	18	1.2500	31.75	0	+0.0007	+0.018
1.2500	31.75	2.0000	50.8	0	+0.0008	+0.021
2.0000	50.8	3.1496	80	0	+0.0009	+0.024
3.1496	80	4.7244	120	0	+0.0011	+0.028
4.7244	120	7.0866	180	0	+0.0013	+0.033

Bearing Housing Spherical Bore Diameter Tolerances:

The standard spherical inside diameter of AMI Bearing Housings is known as a “J7” fit. The dimensional tolerance on spherical inside diameters of housings are classified into an “H7” for clearance fit, “K7” for interference fit, and “J7” for intermediate fit between “H7” and “K7”.

Radial Internal Clearance:

AMI uses “C0” radial internal clearance as a standard for all of our insert bearings (-4° to 212°F) AMI offers a wide range of internal clearance ranges for cold and high temperature applications.

Recommended Shaft Tolerances:**Table 3**

Inch Size Shafting	Metric Size Shafting
Shaft Diameter up to 1-15/16” Nominal to -0.0005”	Shaft Diameter up to 45 mm Nominal to -0.013 mm
Shaft Diameters 2” to 4-7/16” Nominal to -0.0010”	Shaft Diameters 50 mm to 140 mm Nominal to -0.025 mm

Recommended Housing Bore Tolerances for SUE/SER Bearing Types:**Table 4**

AMI Bearing #	Dimension in Inches (Millimeters)									
	O.D. of Bearings		Stationary Housing				Rotating Housing			
	Diameters		Diameters		Resultant Fit		Diameters		Resultant Fit	
	Max	Min	Min	Max	Loose	Tight	Min	Max	Loose	Tight
SUE/SER 204	1.8504 (47.000)	1.8500 (46.989)	1.8503 (46.997)	1.8510 (47.014)	0.0010 (0.025)	0.0001 (0.003)	1.8498 (46.985)	1.8505 (47.002)	0.0005 (0.013)	0.0006 (0.015)
SUE/SER 205	2.0472 (52.000)	2.0467 (51.987)	2.0471 (51.997)	2.0477 (52.012)	0.0010 (0.025)	0.0001 (0.003)	2.0466 (51.985)	2.0472 (52.00)	0.0005 (0.013)	0.0006 (0.015)
SUE/SER 206	2.4409 (62.000)	2.4404 (61.987)	2.4408 (61.997)	2.4414 (62.012)	0.0010 (0.025)	0.0001 (0.003)	2.4403 (61.985)	2.4409 (62.000)	0.0005 (0.013)	0.0006 (0.015)
SUE/SER 207	2.8346 (72.000)	2.8341 (71.987)	2.8345 (71.997)	2.8351 (72.012)	0.0010 (0.025)	0.0001 (0.003)	2.8340 (71.985)	2.8346 (72.000)	0.0005 (0.013)	0.0006 (0.015)
SUE/SER 208	3.1496 (80.000)	3.1491 (79.987)	3.1495 (79.997)	3.1501 (80.012)	0.0010 (0.025)	0.0001 (0.003)	3.1490 (79.985)	3.1496 (80.000)	0.0005 (0.013)	0.0006 (0.015)
SUE/SER 209	3.3465 (85.000)	3.3459 (84.985)	3.3464 (84.997)	3.3472 (85.018)	0.0013 (0.033)	0.0001 (0.003)	3.3458 (84.982)	3.3466 (85.003)	0.0007 (0.018)	0.0007 (0.018)
SUE/SER 210	3.5433 (90.000)	3.5427 (89.985)	3.5432 (89.997)	3.5440 (90.018)	0.0013 (0.033)	0.0001 (0.003)	3.5426 (89.982)	3.5434 (90.003)	0.0007 (0.018)	0.0007 (0.018)
SUE/SER 211	3.9370 (100.000)	3.9364 (99.985)	3.9369 (99.997)	3.9377 (100.018)	0.0013 (0.033)	0.0001 (0.003)	3.9363 (99.982)	3.9371 (100.003)	0.0007 (0.018)	0.0007 (0.018)
SUE/SER 212	4.3307 (110.000)	4.3301 (109.985)	4.3306 (109.997)	4.3314 (110.018)	0.0013 (0.033)	0.0001 (0.003)	4.3300 (109.982)	4.3308 (110.003)	0.0007 (0.018)	0.0007 (0.018)

BEARING MOUNTING

Set-Screw Locking:

1. Inspect the Shaft
 - Measure the shaft to ensure it is within recommended tolerances per Table 3 on page 133:
 - Check for any nicks or burrs that might prevent the bearing from sliding on the shaft easily
 - Clean the mounting surface, then apply a film of light weight oil
2. Place the bearing on the shaft
 - Do not hammer the bearing onto the shaft
3. Bolt the housing to the mounting surface
 - The bearing and shaft must be aligned within 2°
 - Rotate the shaft to ensure it rotates smooth and freely
 - It is expected that plain washers will be used under mounting bolt heads to span the slot width
4. Align the setscrews of the bearings at both ends of the shaft
 - See Figure 1
5. Alternate Tightening of Setscrews
 - Tighten set screw "A" half of the recommended tightening torque (Figure 2)
 - Tighten set screw "B" all the way to the recommended tightening torque (Figure 2) per Table 5
 - Go back to set screw "A" and tighten it all the way to the recommended tightening torque with a variable torque wrench per Table 5

Figure 1:


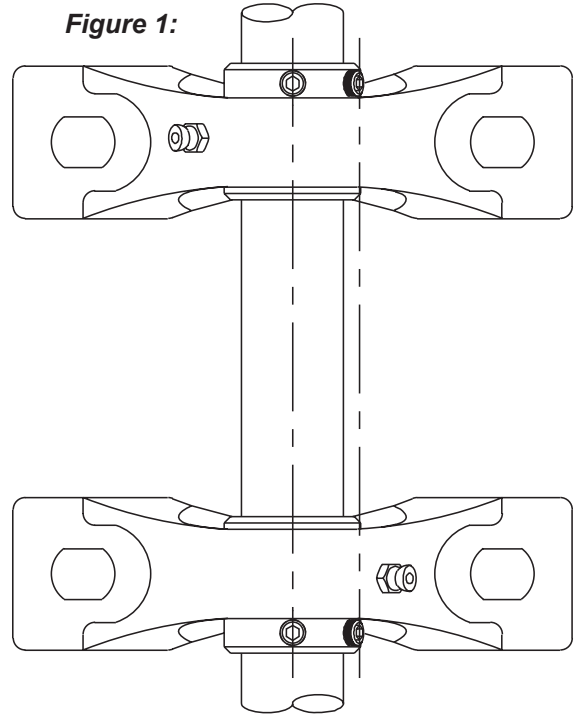


Figure 2:

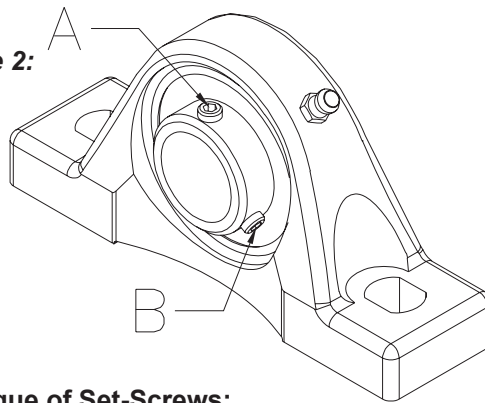

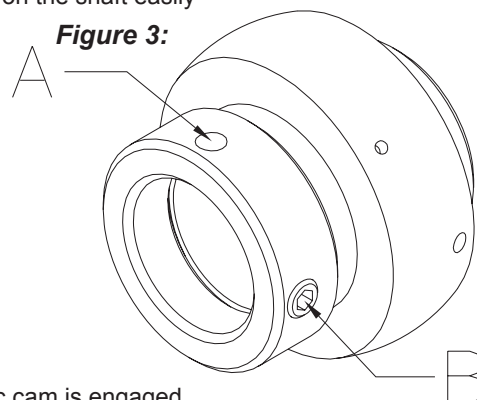
Recommended Tightening Torque of Set-Screws:

Table 5

Applicable Inch / Metric Bearing No.				Recommended Tightening Torque (in-lbf)	
				zone hardened inner ring	through hardened inner ring
			B1 - B3	21	
			B4	22	
UC201- UC203	UC305 - UC306	UCX05			35
UC204 - UC206			B5 - B6	43	
	UC307	UCX06 - UCX08			74
UC207 - UC209			B7 - B8	104	
	UC308 - UC309	UCX09 - UCX12			143
UC210 - UC213				208	
UC214 - UC216				347	
UC217 - UC218	UC310 - UC316	UCX13 - UCX18			247
	UC317 - UC324	UCX20			590
	UC326 - UC328				998

BEARING MOUNTING (continued)**Eccentric Locking Collar:**


1. Inspect the Shaft
 - Measure the shaft to ensure it is within recommended tolerances per Table 3 on page 133:
 - Check for any nicks or burrs that might prevent the bearing from sliding on the shaft easily
 - Clean the mounting surface, then apply a film of light weight oil
2. Place the bearing on the shaft
 - Do not hammer the bearing onto the shaft
3. Bolt the housing to the mounting surface
 - The bearing and shaft must be aligned within 2°
 - Rotate the shaft to ensure it rotates smooth and freely
 - It is expected that plain washers will be used under mounting bolt heads to span the slot width
4. Fasten the unit to the shaft
 - Place the eccentric locking collar on the track of the inner bearing ring
 - Rotate the collar by hand **in the direction of rotation** until the eccentric cam is engaged
 - Insert a drift pin or straight punch in the hole on the O.D. of the collar "A" and strike with a small hammer to positively engage the collar
 - Tighten the set screw "B" to the recommended tightening torque per Table 6 to hold the collar in the engaged position

**Recommended Tightening Torque of Eccentric Locking Collar Set-Screws:****Table 6**

Applicable Inch / Metric Bearings			Recommended Tightening Torque (in-lbf)
UG204 - UG205	KH201 - KH205	KHR201 - KHR205	43
UG206	KH206	KHR206	104
UG207 - UG210	KH207 - KH210	KHR207 - KHR210	208
UG211 - UG212	KH211	KHR211	234

BEARING MOUNTING (continued)**Accu-Loc Concentric Locking Collar:**

1. Inspect the Shaft
 - Measure the shaft to ensure it is within recommended tolerances per Table 3 on page 133:
 - Check for any nicks or burrs that might prevent the bearing from sliding on the shaft easily
 - Clean the mounting surface, then apply a film of light weight oil
2. Place the bearing on the shaft
 - Do not hammer the bearing onto the shaft
3. Bolt the housing to the mounting surface
 - The bearing and shaft must be aligned within 2°
 - Rotate the shaft to ensure it rotates smooth and freely
 - It is expected that plain washers will be used under mounting bolt heads to span the slot width
4. Fasten the unit to the shaft
 - Place the locking collar on the tangs of the inner bearing ring with the chamfered corner on the bore of the collar toward the bearing. The collar is stamped with the word "FRONT" this should be facing away from the bearing and readable to the installer.
 - Tighten the capscrew to the recommended tightening torque per Table 7 using a variable torque wrench

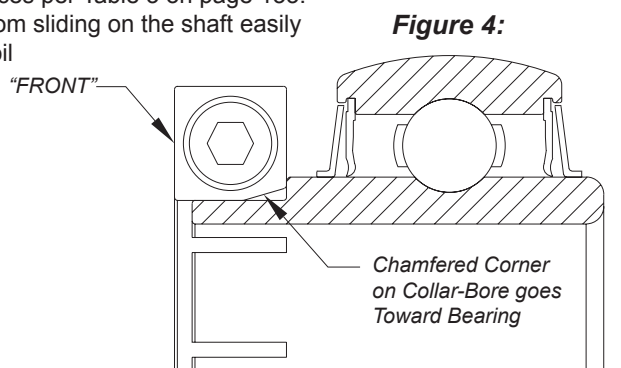**Recommended Tightening Torque of Accu-Loc Collar Capscrews:****Table 7**

Applicable Inch Bearing No.	Recommended Tightening Torque (in-lbf)
	Black Oxide Finish
UE204-12 - UE206-20	60
UE207-20 - UE208-24	90
UE209-27 - UE209-28	90
UE210-31 - UE211-32	140
UE212-39	250
UEX05-16	35
UEX06-19 - UEX09-28	70
UEX10-31 - UEX11-35	140

Applicable Metric Bearing No.	Recommended Tightening Torque (in-lbf)
	Black Oxide Finish
UE204 - UE206	35
UE207 - UE209	70
UE210 - UE211	140
UE212	250

BEARING MOUNTING (continued)**Adapter Sleeve:**

Bearing units with adapter sleeves permit wider shaft tolerances and can be used in applications where vibration and shock is heavy, as this locking device has superior holding power over all other types.


1. Inspect the Shaft

- Measure the shaft to ensure it is within recommended tolerances per Table 8:

Recommended Shaft Tolerances for Bearing with Adapter Sleeves:**Table 8**

Inch Size Shafting	Metric Size Shafting
Shaft Diameter up to 1-15/16" Nominal to -0.0020"	Shaft Diameter up to 45 mm Nominal to -0.050 mm
Shaft Diameters 2" to 4-7/16" Nominal to -0.0030"	Shaft Diameters 50 mm to 140 mm Nominal to -0.075 mm

- Check for any nicks or burrs that might prevent the bearing from sliding on the shaft easily
 - Clean the mounting surface, then apply a film of light weight oil
2. Mount the adapter sleeve
- Slide the adapter sleeve onto the shaft with the threads on the sleeve facing the outboard side
 - Position the sleeve at the approximate location of the bearing centerline
3. Mount the bearing
- Apply a light coating of oil on the outside diameter of the sleeve and threads
 - Starting with the large end of the bearing bore, slide the bearing onto the adapter sleeve so that the taper of the bearing matches the taper of the sleeve
4. Bolt the housing to the mounting surface
- The bearing and shaft must be aligned within 2°
 - Rotate the shaft to ensure it rotates smooth and freely
 - It is expected that plain washers will be used under mounting bolt heads to span the slot width
5. Install the Locknut and Lockwasher
- Slide the lockwasher on the adapter sleeve with the inner prong of the lockwasher pointing toward the bearing
 - Install the locknut on the threads of the adapter sleeve with the chamfered face toward the bearing
 - Tighten the locknut using a spanner wrench to the recommend torque specifications per Table 9
 - Find a lockwasher tang "A" nearest to one of the slots "B" in the locknut. If a slot does not line up with one of the tangs on the lockwasher, back off the locknut until one does
 - Bend the tang of the lockwasher into the slot of the locknut. This will retain the correct position of the locknut

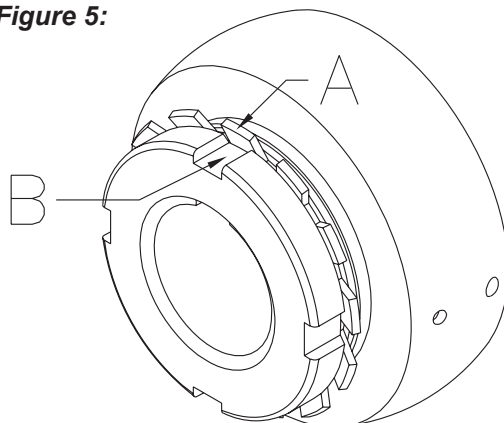Figure 5:

ADAPTER SLEEVE LOCKNUT RECOMMENDED TIGHTENING TORQUE

Table 9

Applicable Bearing # (Normal Duty)	Normal Load Application (ft-lbs)		Heavy Load Application (ft-lbs)	
	min	max	min	max
UK205	11	22	14	29
UK206	14	29	22	43
UK207	22	43	36	72
UK208	29	58	43	87
UK209	29	58	43	87
UK210	36	72	54	108
UK211	51	101	76	152
UK212	72	145	105	210
UK213	80	159	119	239
UK215	94	188	134	268
UK216	116	231	170	340
UK217	148	297	217	434
UK218	177	354	260	521

Applicable Bearing # (Medium Duty)	min		max	
	min	max	min	max
UKX05	14	29	25	51
UKX06	25	51	36	72
UKX07	29	58	43	87
UKX08	36	72	54	108
UKX09	43	87	65	130
UKX10	58	116	87	174
UKX11	76	152	112	224
UKX12	87	174	130	260
UKX13	119	239	174	347
UKX15	141	282	203	405
UKX16	166	333	246	492
UKX17	203	405	304	608
UKX18	231	463	347	694
UKX20	333	665	492	984

Applicable Bearing # (Heavy Duty)	min		max	
	min	max	min	max
UK305	14	29	22	43
UK306	22	43	33	65
UK307	29	58	43	87
UK308	40	80	58	116
UK309	54	108	80	159
UK310	72	145	112	224
UK311	90	181	130	260
UK312	112	224	166	333
UK313	130	260	195	391
UK315	184	369	260	521
UK316	217	434	325	651
UK317	260	521	383	767
UK318	297	593	448	897
UK319	347	694	521	1042
UK320	434	868	600	1201
UK322	448	897	890	1779
UK324	593	1186	1049	2098
UK326	723	1447	1302	2604
UK328	1049	2098	1555	3110

LUBRICATION

Proper lubrication is essential for adequate bearing life! A bearing cannot survive without it.

AMI Standard Lubricants:

AMI Bearings have an initial fill of lubricant when we manufacture them, therefore it is not necessary to lubricate prior to their initial operation. Below is a list of our standard used lubricants and their basic physical properties.

Table 10

APPLICATION	General Purpose	High Temperature		Cold Temperature	Free Spinning		Food Grade
PRODUCT NAME	Shell Gadus S2 V100 #3	Yuken Super-Lube #3 (HR5 Type)	Kluber Noxlub BF4026 (HR23 Type)	Shell AeroShell #7	Mobil Velocite 10 (FS or FSX type)	Mobilith SHC 100 (FSAM1 type)	Citgo Clarion HTEP #2
PHYSICAL PROPERTY							
Lubricant Type	Grease	Grease	Grease	Grease	Oil	Grease	Grease
Color	Amber	Tan	White	Amber	-	Red	Off-White
NLGI Grade	3	3	2	2	N/A	2	2
Thickener Type	Lithium	Calcium Complex	PTFE	Microgel	N/A	Lithium Complex	Aluminum Complex
Base Oil Type	Mineral Oil	Mineral Oil	PFPE	Synthetic Diester	Mineral Oil	PAO + Ester	Mineral Oil
Base Oil Viscosity @ 40°C	100 cSt	300 cSt	390 cSt	10.3 cSt	22 cSt	100 cSt	954 cSt
Base Oil Viscosity @ 100°C	11 cSt	25 cSt	39 cSt	3.1 cSt	4 cSt	-	101 cSt
Operating Temperature Range	-13°F - 265°F (-25°C - 130°C)	-4°F - 400°F (-20°C - 200°C)	-20°F - 500°F (-30°C - 260°C)	-100°F - 300°F (-70°C - 150°C)	-20°F - 250°F (-30°C - 120°C)	-40°F - 300°F (-70°C - 150°C)	-10°F - 325°F (-12°C - 160°C)

We have many other lubricants available as well, including several solid lubricant choices. Consult with AMI for recommendations.

Relubrication Intervals:**Table 11**

Bearing Operating Temperature	Environmental Condition		
°F	Clean	Dirty	Washdown or Extremely Dirty
Up to 122	12 months	6 months	3 months
Up to 158	6 months	2 months	1 month
Up to 212	3 months	2 weeks	1 week
Up to 248	6 weeks	1 week	3 days
Up to 302	2 weeks	3 days	daily

LUBRICATION (continued)**Compatibility:****Beware of Mixing Greases!**

When two incompatible greases are mixed, either one of two things can happen. Either the mixture hardens and will not release any of the oil or the opposite effect; the mixture softens and releases all of the oil.

In either case, the end result is basically the same; there is no means to effectively lubricate the bearing.

Two good greases, when mixed together can make one very bad grease!

It is recommended to use the same type of grease that was originally supplied with the bearing. When changes in grease type are necessary, please consult your lubricant supplier or AMI engineering staff to determine the compatibility of the mixture

Table 12

C = Compatible B = Borderline I = Incompatible	Aluminum Complex	Barium	Bentonite Clay	Calcium	Calcium 12-Hydroxy	Calcium Complex	Calcium Sulfonate	Lithium	Lithium 12-Hydroxy	Lithium Complex	Polyurea	Sodium
Aluminum Complex	C	I	I	I	C	I	B	I	I	C	I	I
Barium	I	C	I	I	C	I	B	I	I	I	I	I
Bentonite Clay	I	I	C	C	C	I	B	I	I	I	I	I
Calcium	I	I	C	C	C	B	I	C	B	B	I	I
Calcium 12-Hydroxy	C	C	C	C	C	B	B	C	C	C	I	I
Calcium Complex	I	I	I	B	B	C	C	I	I	C	C	I
Calcium Sulfonate	B	B	B	I	B	C	C	C	C	C	B	I
Lithium	I	I	I	C	C	I	C	C	C	C	I	B
Lithium 12-Hydroxy	I	I	I	B	C	I	C	C	C	C	I	I
Lithium Complex	C	I	I	B	C	C	C	C	C	C	I	B
Polyurea	I	I	I	I	I	C	B	I	I	I	C	I
Sodium	I	I	I	I	I	I	I	B	I	B	I	C

Load Capacity and Life of Bearings

Bearing “Life” is defined as the number of revolutions and or hours at a given speed, which the bearing runs before the first evidence of fatigue develops in the material of either ring or of any of the rolling elements.

Basic Dynamic Load Rating, C_r : The constant stationary radial load which a rolling bearing could theoretically endure for a basic rating life of one million revolutions.

Basic Static Load Rating, C_{or} : A load acting on a non-rotating bearing. Maximum load that can be applied to the bearing without permanently damaging the bearing.

The rating life of ball bearings is calculated using the following formulas:

$$L_{10} = \left(\frac{C}{P} \right)^3$$

$$L_{10h} = \left(\frac{C}{P} \right)^3 \times \frac{10^6}{60 \times n}$$

Where:

L_{10} : Rated Bearing Life in millions of revolutions

L_{10h} : Rated Bearing Life in operating hours

C : The bearings basic dynamic load rating in lbf or kgf

P : The equivalent applied radial load in lbf or kgf

n : Shaft speed in RPM

Additionally an adjusted rating life can be determined using the following formula:

$$L_{10a} = a_1 \times a_2 \times a_3 \times L_{10}$$

a_1 Reliability Factor:

This is an adjustment factor where estimated fatigue life other than 90% is desired.

Table 13

RELIABILITY %	L_{na}	a_1
99	L_1	0.21
98	L_2	0.33
97	L_3	0.44
96	L_4	0.53
95	L_5	0.62
90	L_{10}	1
50	L_{50}	5

a_2 Material Factor:

AMI Bearings, Inc. uses AISI 52100 high chromium bearing steel or SUS 440C stainless steel for our rolling elements and bearing rings. A factor of 1.0 is used for these materials. If a reduction in material hardness is expected due to high operating temperatures, a reduced a_2 factor should be used. Consult with AMI engineers in these situations.

a_3 Operating Condition Factor:

This factor should take into account the adequacy of lubrication, presence of contamination, and unusual loading or mounting conditions.

Values less than 1.0 should be considered when the kinematic viscosity of the lubricant is less than 13 cSt at the operating temperature or when the rotational speed is exceptionally low.

Values greater than 1.0 can only be considered when the lubrication conditions are so favorable that the probability of failure caused by surface distress is greatly reduced.

Insert bearings are normally mounted on a shaft with a loose fit and rely on features such as inner bearing width and a locking device, the “American Bearing Manufacturers Association (ABMA)” recommends an a_3 factor of 0.456.


Consult with AMI engineers for proper selection of these life adjustment factors.

These tables show bearing load ratings at various RPM, based on 500 hours minimum life - 2,500 hours average life.


Table 14

AMI Bearing # NORMAL and MEDIUM DUTY					Radial Load Rating at Various RPM														rpm
UC200 UK200 SER200	UCX00 UKX00	B	UG200	KH200	33-1/3	50	100	250	500	750	1000	1200	1500	2000	2400	3600	5000		
UCW (201-203)	-	1-3	201-203	201-203	2150	1880	1490	1100	870	760	690	650	605	550	515	450	405	Radial Load Rating in Pounds	
201-204	-	4	204	204	2890	2520	2000	1480	1170	1020	930	875	810	740	695	605	545		
205	-	5	205	205	3150	2750	2190	1610	1280	1120	1020	955	885	805	760	660	595		
206	X05	6	206	206	4410	3850	3060	2250	1790	1560	1420	1340	1240	1130	1060	925	830		
207	X06	7	207	207	5820	5090	4040	2970	2360	2060	1870	1760	1640	1490	1400	1200			
208	X07	-	208	208	6590	5760	4570	3370	2670	2340	2120	2000	1850	1680	1590	1380			
209	X08	-	209	209	7420	6450	5120	3770	3000	2620	2380	2240	2080	1890	1780	1550			
210	X09	-	210	210	7980	6930	5500	4060	3220	2810	2550	2400	2230	2030	1910	1670			
211	X10	-	-	211	9700	8480	6730	4960	3930	3440	3120	2940	2730	2080	2330				
212	X11	-	-	-	11800	10300	8180	6030	4780	4180	3800	3570	3320	3010	2840				
213	X12	-	-	-	12900	11300	8940	6590	5230	4570	4150	3910	3630	3300	3100				
214	X13	-	-	-	14000	12200	9710	7150	5680	4960	4510	4240	3940	3580	3370				
215	X14	-	-	-	14900	13000	10300	7600	6040	5270	4790	4510	4180	3800	3580				
216	X15	-	-	-	16300	14300	11300	8340	6620	5780	5250	4940	4590	4170					
217	X16	-	-	-	18700	16400	13000	9570	7600	6640	6030	5680	5270	4790					
218	X17	-	-	-	21500	18800	14900	11000	8720	7620	6920	6510	6040	5490					
-	X18	-	-	-	24500	21400	17000	12500	9920	8670	7880	7410	6880						
-	X20	-	-	-	30200	26400	20900	15400	12200	10700	9720	9149	8490						
HEAVY DUTY																			
UC 300		UK 300			33-1/3	50	100	250	500	750	1000	1200	1500	2000	2400	3600	5000		
305		305			4780	4180	3220	2440	1940	1700	1540	1450	1350	1220	1150	1010	900		
306		306			6020	5260	4170	3080	2440	2130	1940	1820	1690	1540	1450	1260	1130		
307		307			7530	6550	5200	3830	3040	2660	2410	2270	2110	1920	1800	1570			
308		308			9150	7990	6340	4670	3710	3240	2950	2770	2570	2340	2200	1920			
309		309			11570	10100	8030	5910	4690	4100	3730	3510	3250	2960	2780	2430			
310		310			13900	12100	9630	7110	5630	4920	4470	4210	3910	3550	3340				
311		311			16100	14100	11200	8220	6530	5700	5180	4870	4530	4110	3870				
312		312			18300	16000	12700	9350	7420	6480	5890	5540	5150	4670	4400				
313		313			20800	18200	14400	10600	8450	7380	6710	6310	5860	5320	5010				
314		314			23400	20400	16200	11940	9480	8280	7520	7080	6580	5970	5620				
315		315			25600	22300	17700	13100	10400	9060	8230	7750	7190	6530					
316		316			27650	24100	19100	14100	11200	9760	8870	8350	7750	7040					
317		317			29700	26000	20600	15200	12100	10500	9580	9010	8370	7600					
318		318			32200	28100	22300	16400	13100	11400	10400	9750	9050						
319		319			34400	30000	23800	17600	13900	12200	11100	10400	9670						
320		320			39000	34100	27100	19900	15800	13800	12600	11800	11000						
321		321			41200	36000	28600	21100	16720	14600	13300	12500	11600						
322		322			46100	40300	32000	23500	18700	16300	14800	14000							
324		324			46500	40600	32300	27800	18900	16500	15000	14100							
326		326			51600	45100	35800	26400	20900	18300	16600	15600							
328		328			57300	50100	39700	29300	23200	20300	18400	17400							

Compare Accu-LOC® versus Set-Screws!

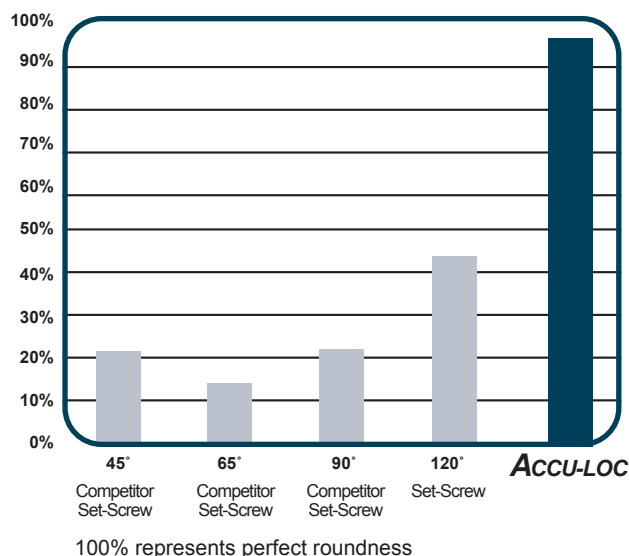

Accu-LOC

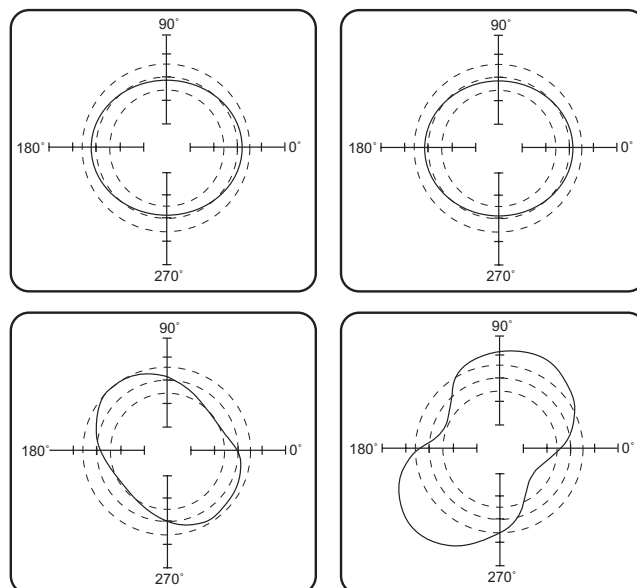

Tests show the Accu-LOC maintains roundness and near perfect concentricity when compared to set-screw methods.

Table 15

Accu-LOC			L10 Life	Revolutions Per Minute - (RPM)													
Shaft Size	UE200	SUE 200		50	150	500	1000	1500	1750	2000	2500	3000	3500	4500	5500	6500	7500
3/4" 20mm	UE204-12 UE204	SUE204-12 SUE204	500	—	—	1279	1014	887	843	809	750	706	671	617	578	544	515
			3000	1514	1049	706	559	485	466	446	417	387	372	338	314	304	279
			15000	887	617	417	328	289	274	260	245	230	216	201	186	181	167
			20000	809	559	372	304	260	250	235	225	211	196	181	172	157	152
			30000	706	485	328	260	230	216	211	196	181	172	157	152	137	132
1" 25mm	UE205-16 UE205	SUE205-16 SUE205	500	—	—	1387	1103	965	916	877	813	764	730	666	622	588	559
			3000	1642	1142	764	613	534	505	485	446	421	397	368	348	319	309
			15000	965	666	446	358	314	299	284	265	250	235	216	201	186	181
			20000	877	613	407	328	284	270	255	245	230	216	201	186	172	167
			30000	764	534	358	284	250	235	230	206	201	186	172	167	152	142
1-1/8" 1-3/16" 1-1/4" 30mm	UE206-18 UE206-19 UE206-20 UE206	SUE206-18 SUE206-19 SUE206-20 SUE206	500	—	—	2063	1642	1431	1362	1303	1205	1137	1078	995	926	877	838
			3000	2440	1705	1137	907	794	750	715	666	627	598	554	505	485	461
			15000	1431	995	666	529	461	441	426	392	372	348	319	294	279	265
			20000	1303	907	603	485	426	402	377	358	333	319	294	274	260	245
			30000	1137	794	529	426	372	348	333	309	294	279	260	235	221	216
1-1/4" 1-3/8" 1-7/16" 35mm	UE207-20 UE207-22 UE207-23 UE207	SUE207-20 SUE207-22 SUE207-23 SUE207	500	—	—	2671	2122	1857	1769	1691	1573	1480	1401	1284	1205	1137	
			3000	3175	2195	1480	1171	1024	975	931	862	809	774	706	662	627	
			15000	1857	1284	862	686	603	564	544	505	475	456	412	387	368	
			20000	1691	1171	789	627	544	515	490	461	431	412	372	353	328	
			30000	1480	1024	686	544	475	456	431	402	382	358	328	309	289	
1-1/2" 40mm	UE208-24 UE208	SUE208-24 SUE208	500	—	—	3263	2597	2269	2151	2053	1911	1798	1710	1568	1470	1382	
			3000	3876	2680	1798	1426	1250	1186	1137	1049	995	941	862	809	764	
			15000	2269	1568	1049	838	730	691	666	617	578	549	500	470	446	
			20000	2053	1426	956	760	666	627	603	559	529	500	461	431	402	
			30000	1798	1250	838	666	578	549	529	485	461	436	402	372	353	
1-11/16" 1-3/4" 45mm	UE209-27 UE209-28 UE209	SUE209-27 SUE209-28 SUE209	500	—	—	3513	2788	2430	2313	2215	2058	1931	1828	1686	1573		
			3000	4155	2886	1931	1529	1343	1274	1215	1132	1068	1009	921	867		
			15000	2430	1686	1132	902	789	745	715	657	622	588	539	510		
			20000	2215	1529	1029	818	715	681	652	603	568	539	495	461		
			30000	1931	1343	902	715	622	593	568	524	495	466	431	402		
1-15/16" 2" 50mm	UE210-31 UE210-32 UE210	SUE210-31 SUE210-32 SUE210	500	—	—	3836	3044	2654	2525	2418	2247	2108	1996	1840	1717		
			3000	4537	3151	2108	1669	1466	1391	1327	1236	1166	1102	1006	947		
			15000	2654	1840	1236	984	861	813	781	717	679	642	589	556		
			20000	2418	1669	1124	893	781	744	712	658	621	589	540	503		
			30000	2108	1466	984	781	679	647	621	572	540	508	471	439		
2" 2-3/16" 55mm	UE211-32 UE211-35 UE211	SUE211-32 SUE211-35 SUE211	500	—	—	4341	3440	3014	2857	2729	2543	2386	2264	2087			
			3000	5140	3572	2386	1901	1656	1573	1499	1397	1308	1245	1147			
			15000	3014	2087	1397	1107	975	921	882	818	764	730	666			
			20000	2729	1901	1274	1009	882	838	804	745	696	657	608			
			30000	2386	1656	1107	882	774	730	701	652	608	578	529			
2-7/16" 60mm	UE212-39 UE212	SUE212-39 SUE212	500	—	—	5228	4145	3621	3450	3293	3067	2871	2729				
			3000	6199	4302	2881	2283	1994	1896	1813	1686	1578	1499				
			15000	3621	2509	1686	1333	1171	1112	1063	985	921	877				
			20000	3293	2283	1529	1215	1063	1005	965	892	843	799				
			30000	2881	1994	1333	1063	926	877	843	784	735	701				

Radial Load Rating - (lbs)

Radial Load Rating - (lbs)

Prices & Acceptance	All orders are for prompt acceptance only by the company's home office. In the event of an increase or decrease in company prices, the price on any order or contract will be the one in effect at time of shipment.
Taxes	Any sales, use, consumption or other tax applicable to the sale, purchase or use of the products is not included in the price shown on this order and shall be paid by the purchaser whenever due.
Terms	Payment terms are net cash within 30 days from date of invoice. All orders are subject to the approval of our credit department.
Minimum Charge	NO MINIMUM
Shipments	Shipments will be routed to incur the lowest available transportation charges. All premium rate shipping services, express (air or rail), air freight, etc., will be utilized when the customer so specifies. The necessary extra charges will be added to our invoice to cover those premium services. If such shipments would normally qualify for prepayment of transportation charges by reason of products \$2500 or more, our invoice will reflect a deduction equal to the lowest obtainable transportation cost with excess prepaid charges added. All shipments, unless otherwise specified, are F.O.B. factory. Claims for all shortages, damage or non-delivery in transit shall be made by the consignees to the carrier. Request for proof of delivery must be submitted within 90 days from the date of shipment.
Freight Allowance	Freight will be allowed on one shipment to one destination of \$2500 or more net, F.O.B. factory.
Export Shipments	Transportation charges on export shipments will be prepaid to any United States port of exit if said shipment complies with our standard of domestic condition for freight allowance.
Deliveries & Cancellations	All orders are considered firm contracts. If we are unable to meet requested delivery requirements, and/or our expected dates of shipment, we shall not be liable for any claims for delays beyond our control, nor shall we accept cancellation or suspension unless mutually agreed upon in writing.
Packaging	We do not add extra charges for standard packing required by transport companies for domestic or non-ocean shipments. Additional charges may be applied to cover the cost of extra packing, special engineering, servicing or other unusual elements, including overtime authorized by purchaser, which have not been contemplated.
Export Packaging	Price on application.
Patents	We will defend and hold harmless purchasers of our products against charges of infringement or apparatus claims of the United States Patents issued at the time the product is ordered, providing such changes are based exclusively on mechanical infringement by a product designed and manufactured by us. Before this responsibility shall arise, we must be notified in writing and tendered the right to defend, settle or make any changes for the purpose of avoiding infringements. Under no circumstance will our liability exceed the purchase price of the product furnished by us.

NOTE: AN AUTHORIZED RMA FORM MUST ACCOMPANY ALL RETURNS

RETURNED MATERIALS - No goods will be accepted for return unless written authorization is issued from AMI Bearings, Inc. Goods that are returned for any reason other than defective material will be subject to inspection to ensure items are in a resalable condition. A 15% restocking fee plus freight costs will be deducted from the credit.

- The product must be shipped prepaid to our main facility located at 570 N. Wheeling Rd., Mt. Prospect, IL
- The total allowable value of your corporate return will be 10% of your previous calendar year purchase. An offsetting order of equal value is required.
- A product that is 2+ years old will not be accepted for return (reference original purchase order).

AMI WARRANTS THAT THE MERCHANDISE SOLD BY IT HEREUNDER SHALL BE FREE FROM DEFECTS IN MATERIAL AND WORKMANSHIP FOR A PERIOD OF ONE (1) YEAR FROM THE DATE OF SHIPMENT OF THE GOODS BY AMI. THIS IS THE SOLE AND EXCLUSIVE WARRANTY GIVEN BY AMI WITH RESPECT TO THE GOODS AND IS IN LIEU OF AND EXCLUDES ALL OTHER WARRANTIES, EXPRESS OR IMPLIED, ARISING BY OPERATION OF LAW OR OTHERWISE, INCLUDING WITHOUT LIMITATION, MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE WHETHER OR NOT THE PURPOSE OR USE HAS BEEN DISCLOSED TO AMI IN SPECIFICATIONS, DRAWINGS OR OTHERWISE, AND WHETHER OR NOT AMI PRODUCTS ARE SPECIFICALLY DESIGNED AND/OR MANUFACTURED BY AMI FOR BUYER'S USE OR PURPOSE.

THIS WARRANTY DOES NOT EXTEND TO ANY LOSSES OR DAMAGES DUE TO MISUSE, ACCIDENT, ABUSE, NEGLIGENCE, NORMAL WEAR AND TEAR, UNAUTHORIZED MODIFICATION OR ALTERATION, USE BEYOND RATED CAPACITY, OR IMPROPER INSTALLATION, MAINTENANCE OR APPLICATION. TO THE EXTENT THAT BUYER OR ITS AGENTS HAS SUPPLIED SPECIFICATIONS, INFORMATION, REPRESENTATION OF OPERATING CONDITIONS OR OTHER DATA TO AMI IN THE SELECTION OR DESIGN OF THE GOODS AND THE PREPARATION OF AMI'S QUOTATION, AND IN THE EVENT THAT ACTUAL OPERATING CONDITIONS OR OTHER CONDITIONS DIFFER FROM THOSE REPRESENTED BY BUYER, ANY WARRANTIES OR OTHER PROVISIONS CONTAINED HEREIN WHICH ARE AFFECTED BY SUCH CONDITIONS SHALL BE NULL AND VOID. IF WITHIN THIRTY (30) DAYS AFTER BUYER'S DISCOVERY OF ANY WARRANTY DEFECTS WITHIN THE WARRANTY PERIOD, BUYER NOTIFIES AMI THEREOF IN WRITING, AMI SHALL, AT ITS OPTION, REPAIR, OR REPLACE OR REFUND THE PURCHASE PRICE FOR THAT PORTION OF THE GOODS FOUND BY AMI TO BE DEFECTIVE. FAILURE BY BUYER TO GIVE SUCH WRITTEN NOTICE WITHIN THE APPLICABLE TIME PERIOD SHALL BE DEEMED AN ABSOLUTE AND UNCONDITIONAL WAIVER OF BUYER'S CLAIM FOR SUCH DEFECTS. BUYER ASSUMES ALL OTHER RESPONSIBILITY FOR ANY LOSS, DAMAGE, OR INJURY TO PERSONS OR PROPERTY ARISING OUT OF, CONNECTED WITH, OR RESULTING FROM THE USE OF GOODS, EITHER ALONE OR IN COMBINATION WITH OTHER PRODUCTS/COMPONENTS.

IT IS EXPRESSLY UNDERSTOOD THAT ANY TECHNICAL ADVICE FURNISHED BY AMI WITH RESPECT TO THE USE OF THE GOODS IS GIVEN WITHOUT CHARGE, AND AMI ASSUMES NO OBLIGATION OR LIABILITY FOR THE ADVICE GIVEN, OR RESULTS OBTAINED, ALL SUCH ADVICE BEING GIVEN AND ACCEPTED AT THE BUYER'S RISK. AMI BEARINGS, INC.

570 N. Wheeling Road
Mt. Prospect, IL 60056

MBU 2-11

Phone: (800) 882-8462
Fax: (847) 759-0630

TO: _____ _____ _____ _____ _____ (Phone # required for all Canada shipments)	DATE: _____ ATTN: _____ SHIP VIA: _____
---	--

ITEM:	QTY:
<u>Catalog</u>	
Mounted Bearing Units	_____
Corrosion Protection Bearing Units	_____
<u>Other</u>	
_____	_____
_____	_____
_____	_____
_____	_____
_____	_____
_____	_____
_____	_____
_____	_____

Catalogs and product information is also available on our website at:
www.amibearings.com



Stocking Warehouses in North America

Cerritos, CA • Tualatin, OR • Aurora, CO • Carrollton, TX
Atlanta, GA • Stuart, FL • Chicago, IL • Charlotte, NC
Mississauga, ON



Member

Power Transmission Distributors



Participating Manufacturer

Our Mission

The success of AMI Bearings is due to the countless ongoing friendships we have with distributors, suppliers, end-users, representatives and employees. We believe that as AMI continues to grow, we must lift all people associated with our achievements. We will endeavor to ensure that the success of our friends is placed equal with that of our own.

Our Promise

The speed at which business moves today has changed the nature of procurement. Companies no longer can tolerate long lead times for essential components. AMI provides next-day delivery to 94% of the continental U.S. and Canada and 100% within two days. We actively stock all cataloged items throughout our warehouse network, and guarantee same day shipment of all orders received by 4:00pm CST.

AMI is synonymous with flexibility! We will mix, match and even modify product to meet your requirements. Our goal is to make your job easier, so if you need something special, just ask!

AMI's mounted ball bearing line is second to none

Many companies offer lines of mounted ball bearing units and inserts, but AMI's line is unique in its breadth of line, availability of options and the widest selection of locking devices.

Unlike those other companies, AMI offers this extensive product line as "standard." Every bearing is custom-assembled to your exact specifications. So you get the bearing you need with the right type of locking device, lubricant, seals and rings. In fact, we have tens of thousands of possible mounted ball bearing configurations for you to choose from.

We don't stop there

AMI offers a wide range of bearings suitable for virtually any application - from general industry, food and corrosion protection, to free spinning, air movement and high or low temperatures. While certain applications require specific options, most AMI options are suitable for any application.

When you place your order by 4:00pm Central Time, Monday - Friday, we normally ship your bearings the same day. Expedited delivery options are available. Highly specialized configurations and large volume orders may take additional time. Compare this to other companies where their "specials" could take weeks. Or months!

We've set a new standard for what's "standard" in mounted ball bearings

HOUSING STYLES

- ☐ ☒ PILLOW BLOCK
- ☐ ☒ Standard Base
 - ☒ Low Base
- ☐ ☒ Tapped Base
 - ☒ Pedestal Base
 - ☒ Expansion
- ☐ ☒ FLANGED
- ☐ ☒ 2, 3, 4 Bolt
- ☐ ☒ Piloted
- ☐ ☒ TAKE-UP
- ☐ ☒ Wide Slot
- ☐ ☒ Narrow Slot
 - ☒ CARTRIDGE (cylindrical)
- ☐ ☒ HANGER
 - ☒ BOLT HOLE OPTIONS
- ☐ ☒ Elongated
- ☐ ☒ Drilled (round)
- ☐ ☒ Carriage (square)
- ☐ ☒ RELUBRICATION
- ☐ ☒ 1/4-28 UNF Fitting
- ☐ ☒ 1/8" NPT Fitting
- ☐ ☒ Customer specified
- ☐ ☒ Non-relubricatable

HOUSING MATERIALS

- ☒ CAST GRAY IRON
- ☒ CAST MALLEABLE IRON
- ☐ CAST STAINLESS STEEL
- ☒ PRESSED STEEL
- ☐ PRESSED STAINLESS STEEL
- ☐ THERMOPLASTIC
- ☒ RUBBER
- ☒ ZDC ALLOY

MATERIAL PROTECTION

- ☐ ZINC (Insert)
- ☐ KANIGEN (Insert)
 - ☒ BLACK OXIDE (Insert)
- ☐ NICKEL (Housing)
- ☐ TEFLON (Housing)

LOCKING DEVICES

- ☐ ☒ SET SCREW
 - ☒ ECCENTRIC COLLAR
- ☐ ☒ ACCU-LOC® CONCENTRIC COLLAR
 - ☒ TAPERED BORE ADAPTER
 - ☒ HIGH TEMP FLOAT

Exploring your options

You can find out more information on the options shown on these pages by referring to the color coded sources shown below. Copies of these catalogs are available by using the QR codes shown, the URL's provided, or by contacting a member of the AMI sales team.

SERIES

- LIGHT
- ● NORMAL
- MEDIUM
- HEAVY

SAFETY COVERS

- THERMOPLASTIC
 - Open and closed
 - In white, black or OSHA orange
- PRESSED STEEL
 - Open and closed
- PRESSED STAINLESS STEEL
 - Open and closed
- CAST IRON
 - Open and closed

INSERTS

- ● WIDE INNER RING
- ● NARROW INNER RING
 - EXTRA NARROW INNER RING
- ● SPHERICAL OUTER RING
- ● CYLINDRICAL OUTER RING
- ● RELUBRICATABLE
- ● NON-RELUBRICATABLE

INSERT MATERIALS

- ● AISI 52100 STEEL
 - Zone hardened inner rings
- 440 STAINLESS STEEL
 - Through hardened inner rings

SEALS

- ● SINGLE LIP
- DOUBLE LIP
- ● PATENTED RF DOUBLE LIP
- TRIPLE LIP
- FREE SPIN NON-CONTACT
- HIGH/LOW TEMPERATURE SILICONE
- SHUR-SEAL™

ADDITIONAL MACHINING & SERVICES

- ● CUSTOM POSITIONED GREASE FITTINGS
- ● DIMENSIONAL ALTERATIONS
 - If you don't see what you need done in one of our catalogs, ask us
- CUSTOM HOUSING COLORS

LUBRICATION

- GENERAL PURPOSE LITHIUM
- FOOD GRADE
- HIGH TEMPERATURE
- ● LOW TEMPERATURE
- ● LOW VISCOSITY
- ● FREE SPIN
- ● CUSTOMER SPECIFIED



For More Information AMI Mounted Ball Bearing Units Catalog

<http://www.amibearings.com/pdf/mountedcatalog.pdf>



For More Information AMI Corrosion Protection Ball Bearing Units Catalog

<http://www.amibearings.com/pdf/corrosioncatalog.pdf>

Your AMI sales team can deliver more than you realize

If you have purchased AMI mounted ball bearings you know you usually can expect shipment of the exact bearing you need within 24 hours when you place your order by 4:00pm Central Time, Monday - Friday.

You can call 800.882.8642 any day, any time and ask for our Expedited Delivery Service when your needs are even more urgent. When you need this service, we'll do our very best to get you the bearings you need as rapidly as possible.*

What you also may not know is how we can do this. It's simple. Instead of stocking assembled bearings, we stock components in our strategic network of AMI and sales team warehouses in North America.

When you place an order, we go to work


There's a whole lot more your AMI sales team can do for you. They are part of a continent wide network that can provide a range of services to help you achieve the highest possible productivity. It could be an analysis of your bearing usage and maintenance. Or troubleshooting a particular bearing problem. Or suggesting an alternative type of bearing to save you money, or improve performance. Maybe you need a logistics program to ensure orders arrive on a timely basis. Or possibly you need technical assistance with a new application.

Working together with AMI technical services, your AMI sales team is the key to maintaining the efficiency and productivity of your mounted ball bearing applications.

**Expedited Delivery is available in most areas.*

Delivery methods may vary. Additional fees may apply.

Exceptional support & product availability

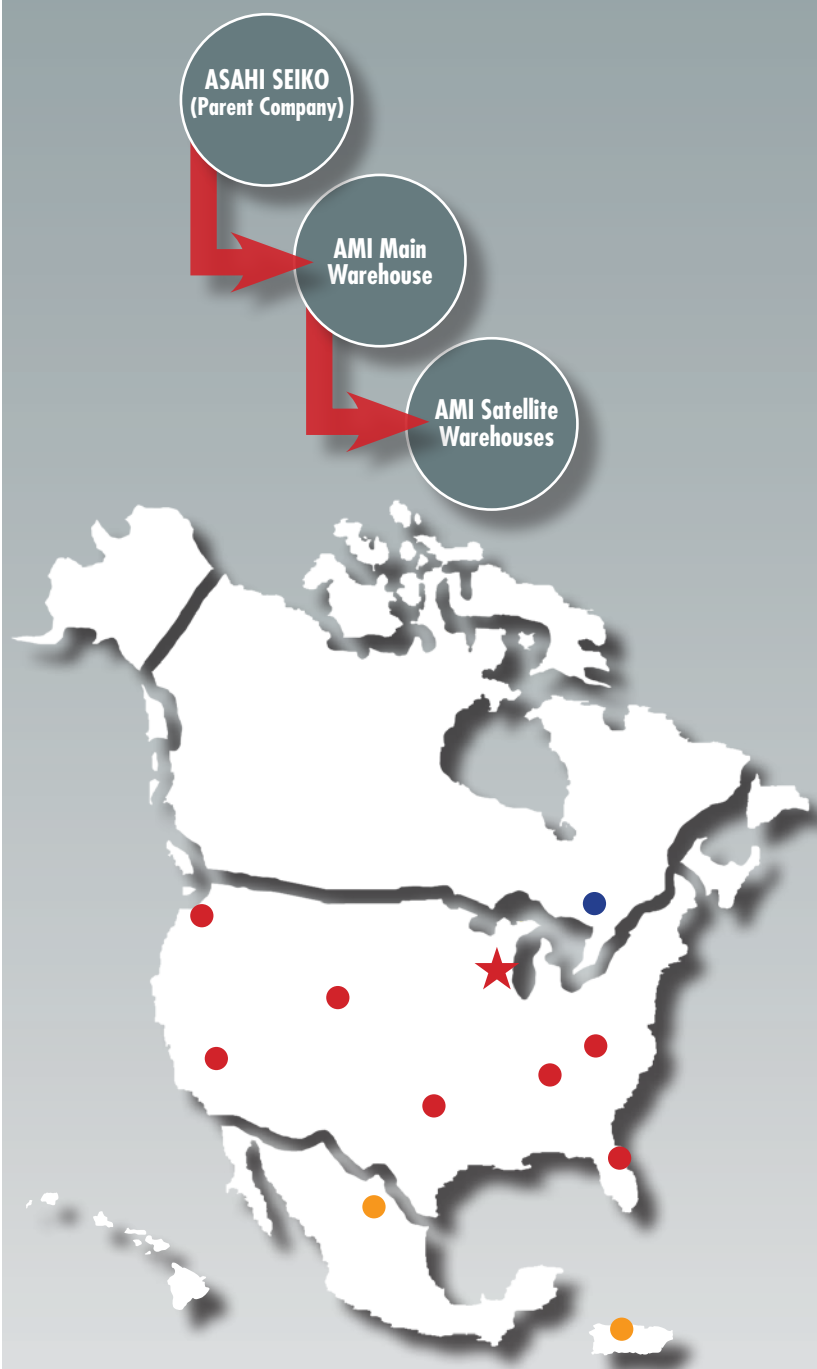

AMI's MULTI-MILLION DOLLAR inventory is warehoused across North America for rapid response to meet your most demanding delivery requirements.

★ AMI North American Headquarters/Warehouse

● USA Stocking Warehouses

● Canadian Stocking Warehouses

● Also serviced by AMI Warehouses

For more information

Clip and mail, or fax to 847.759.0630, or access our on-line resources

To: _____	Date: _____
_____	Attn: _____
_____	Ship via: _____
(Phone # required for all Canada shipments)	



AMI Bearings, Inc.
 570 North Wheeling Road
 Mt. Prospect, IL 60056
 Phone: 847.759.0620
 Toll Free: 800.882.8642
 Fax: 847.759.0630
www.amibearings.com

Item:	Qty:
Catalogs	
Mounted Ball Bearing Units	_____
Corrosion Protection Ball Bearing Units	_____
Brochures & Flyers	
Product Overview	_____
Corrosion Protection Ball Bearing Units	_____
Air Movement Bearing Units	_____
Free Spinning Bearing Inserts	_____
Heavy Duty Mounted Units	_____
High Temperature Units	_____
Locking Devices	_____
Corrosion Bearings with RF Seal	_____
Safety Concerns	_____
Seal Options	_____
Shur-Seal™ Bearing Protection System	_____
Underwater Self-Lubricating Bearings	_____

All literature is available on our website at: www.amibearings.com

**AMI On-line Literature Library**

A complete library of AMI's literature in pdf form can be accessed using this QR code or this URL. It is recommended that you check back often, as AMI's literature library is being continuously updated.

<http://www.amibearings.com/literature.html>

**AMI On-line Literature Order Form**

Just like the form above, but a lot faster. Use this QR code or this URL, specify the literature items you need, how many, and we'll get them right out to you. http://www.amibearings.com/literature_request.html



AMI Bearings, Inc.
570 North Wheeling Road
Mt. Prospect, IL 60056
Phone: 847.759.0620
Toll Free: 800.882.8642
Fax: 847.759.0630
www.amibearings.com

Copyright © 2020 AMI Bearings, Inc.
Printed in USA
Form Number: MBU 04-20

We are continually adding new options.
Check with your AMI sales team for
the latest version of this brochure.

